
dv-sdk

Release master

iniVation AG

Nov 10, 2023

DV-SDK

1 DV-SDK	1
1.1 Installation	1
1.2 DV Modules	2
2 DV-Runtime	33
2.1 Installation	33
2.2 Usage	35
2.3 API	40
Index	135

1.1 Installation

In order to develop modules for DV¹, the dv-sdk library is required. For this purpose, a working C++ 20 toolchain must be installed on the system. This library is currently only available on *Mac* and *Linux* systems. This means using one of the following:

- Apple clang version 14 or newer (on Mac)
- gcc version 10.0 or newer
- clang version 13 or newer

1.1.1 MacOS

Prerequisites

The recommended toolchain is the standard toolchain provided by Apple with XCode. To install this, run:

```
xcode-select --install
```

We also require *cmake* to build applications. The easiest way to install *cmake* is via Homebrew². Run:

```
brew install cmake
```

Library Installation

The dv-sdk library is included in the *installation of dv-runtime*.

If you have a mac with Apple Silicon processor, the development runtime will run natively on it.

¹ <https://docs.inivation.com/master/software/getting-started/installation.html>

² <https://brew.sh>

1.1.2 Linux

Make sure you have a C++ build environment, including *cmake*, installed on your system.

Ubuntu Linux

We provide a PPA repository³ for Focal (20.04 LTS) and Jammy (22.04 LTS) on the x86_64, arm64 and armhf architectures.

```
sudo add-apt-repository ppa:inivation-ppa/inivation
sudo apt-get update
sudo apt-get install dv-runtime-dev
```

Fedora Linux

We provide a COPR repository⁴ for Fedora 34, 35, 36 and rawhide on the x86_64, arm64 and armhf architectures.

```
sudo dnf copr enable inivation/inivation
sudo dnf install dv-runtime-devel
```

Arch Linux

The required files to use dv-sdk are provided via the *dv-runtime installation*.

Gentoo Linux

The required files to use dv-sdk are provided via the *dv-runtime installation*.

1.2 DV Modules

1.2.1 Create your Own DV Module

In this documentation we show you how to:

1. Create your *First Module*.
2. Understand and use the general *Module API*.
3. Understand and use the *I/O API*.
4. Understand and use the *Configuration API*.
5. Understand and use the *Logging API*.

³ <https://launchpad.net/~inivation-ppa/+archive/ubuntu/inivation>

⁴ <https://copr.fedorainfracloud.org/coprs/inivation/inivation/>

Write a First Module

Prerequisites

- A working installation of DV on your computer
 - **macOS** Make sure to also install the `dv-runtime` package via brew
 - **Windows** Development on Windows is not yet supported
- Knowledge of C++ programming
- A working C++ toolchain for your system, including `cmake`
- Your C++ editor or IDE of choice

Start a new project

A demo module that counts events can be found on Gitlab. (<https://gitlab.com/inivation/dv/dv-example-cpp>).

Clone the start module repository with git

```
git clone https://gitlab.com/inivation/dv/dv-example-cpp.git
```

Rename project

After downloading, let's rename the project first. First, rename the project folder

```
mv dv-example-cpp my-first-module
```

after that, rename the project name in the `CMakeLists.txt` file by changing the line `PROJECT (dv-example-cpp C CXX)` with your favourite text editor. For example, you could change it to `PROJECT (my-first-module C CXX)`.

Command Line Build

To build the demo module from terminal, use the following commands:

```
cd my-first-module
cmake .
make -j2 -s
sudo make install
```

If everything goes well, you should end up with a file `my-first-module.` (so|dylib) in the `modules` directory.

IDE

QT Creator

Click *File -> Open File or Project...* and select the projects *CMakeLists.txt*. Configure the project by selecting the builds you want to create and specify their location or use the default.

CLion

Click *File -> Open* and select the project root directory. CLion should automatically detect the project as a CMake project and try to run `cmake` in the project folder.

Eclipse

Eclipse does not support `cmake` natively yet. It does however support *Makefile* projects. Since `cmake` essentially generates a *Makefile*, we can run `cmake` in the command line and open the resulting project in Eclipse.

Run `cmake .`


Now, you can import it into Eclipse with *File -> Import... -> Existing Code as Makefile Project*.

Other


The project is a simple *CMake* project. If your IDE supports CMake, it should be capable of opening the project out of the box.

Run configuration

Set your IDEs run configuration to launch `dv-runtime`. `dv-runtime` is (most likely) in `/usr/bin` (Linux) or `/usr/local/bin` (macOS).

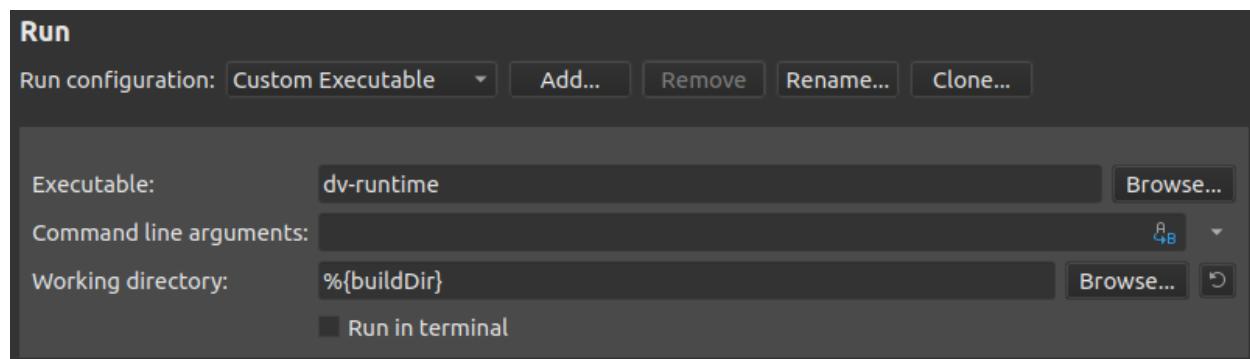

Run configuration for QT Creator (Projects -> Build & Run -> Run).

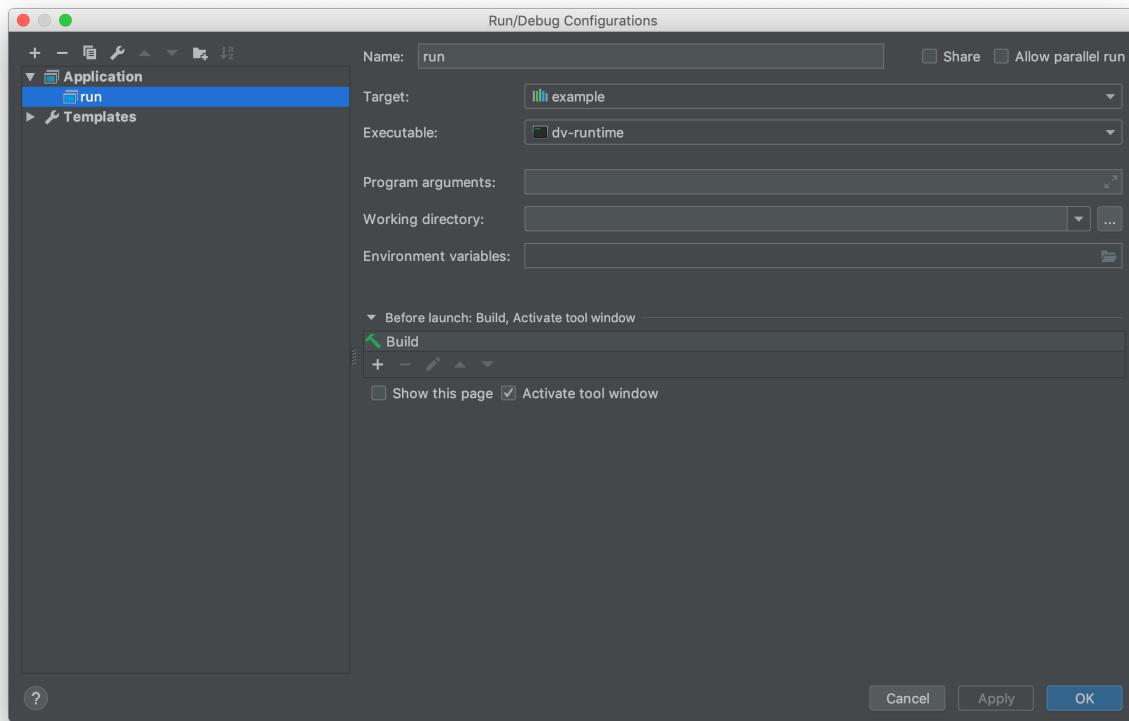


Run configuration for CLion.

To have DV load modules automatically when running the project within an IDE, add `DV_MODULES_PATH=$PATH_TO_MODULE_PROJECT` to **Environment variables**. (`$PATH_TO_MODULE_PROJECT` is a path to the project root directory of your new module.)


Set up DV

To iteratively test a module, you will have to set up DV the following way


1. Launch DV
2. Disable *Connect to -> Manage local runtime instances*. This tells DV to not start its own runtime, and just wait for someone else to start a runtime in its behalf.
3. Select *Shutdown* if DV asks to shut down the current instance.
4. DV is now waiting for a runtime to be started externally, and will connect as soon as one is started

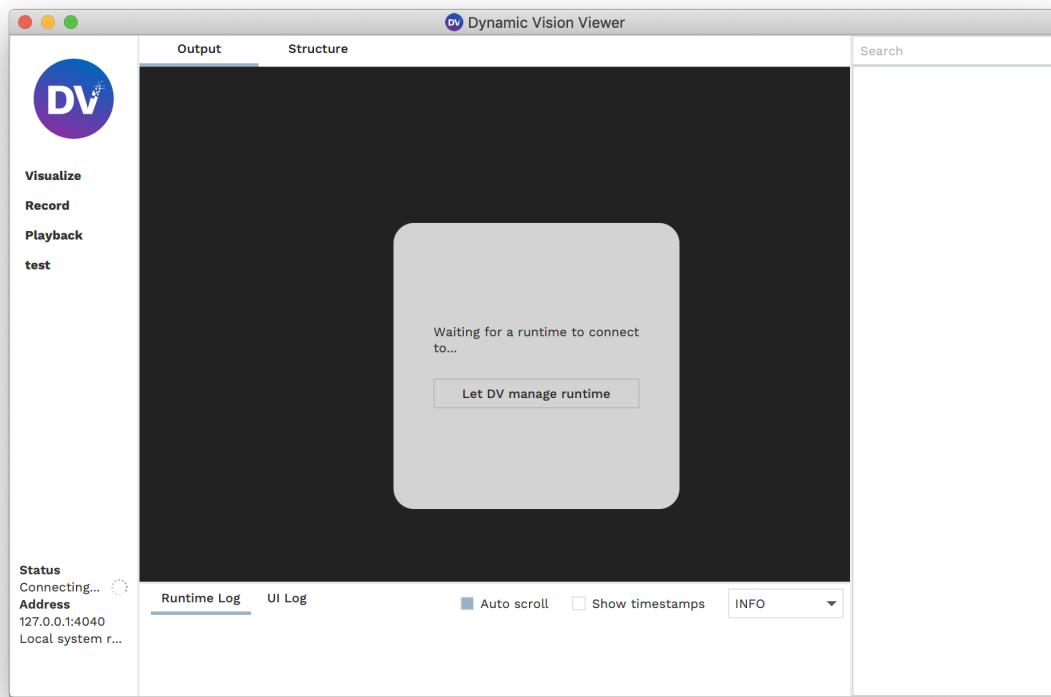


5. Start your runtime by clicking the play button in your IDE. Make sure to have set up your IDE run configuration as described above.
6. As soon as DV connects to the runtime, select the *Structure* tab, click on *Add module* and select *Modify module search path*.
7. Click on *Add path* and add the path where you compiled your modules project directory. Click on *Done*.

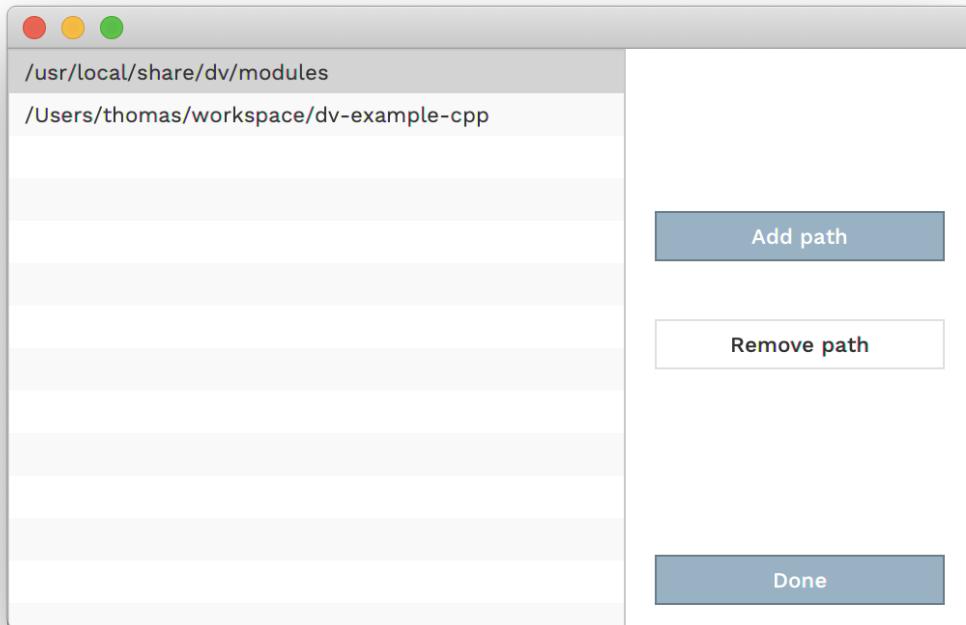

8. Click on Add module again. If your module compiled successfully, it should show up in the list of available modules to add. Click on your module name.

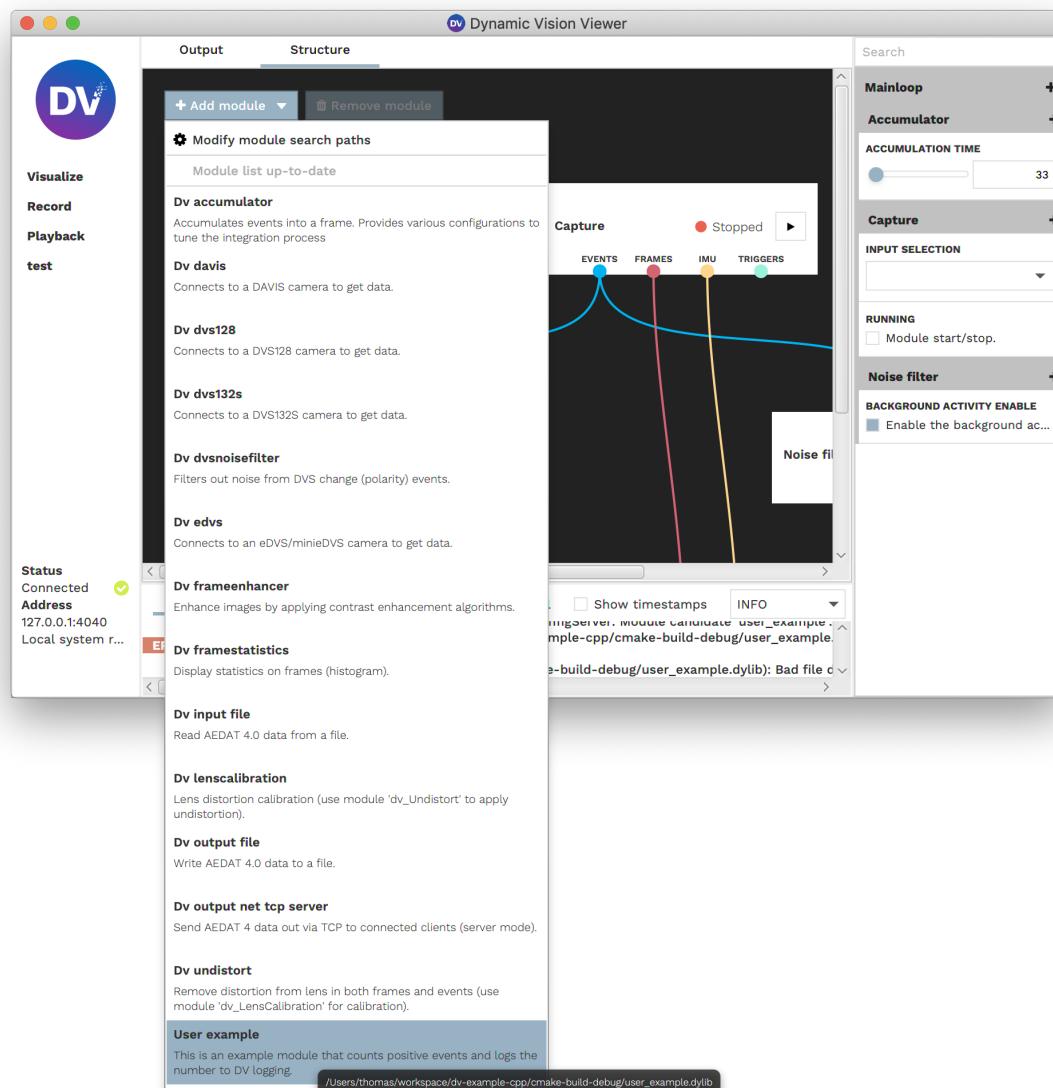

9. Connect the input and outputs of your module. Drag the connections from outputs into your modules inputs, and drag connections from your modules outputs to other inputs.

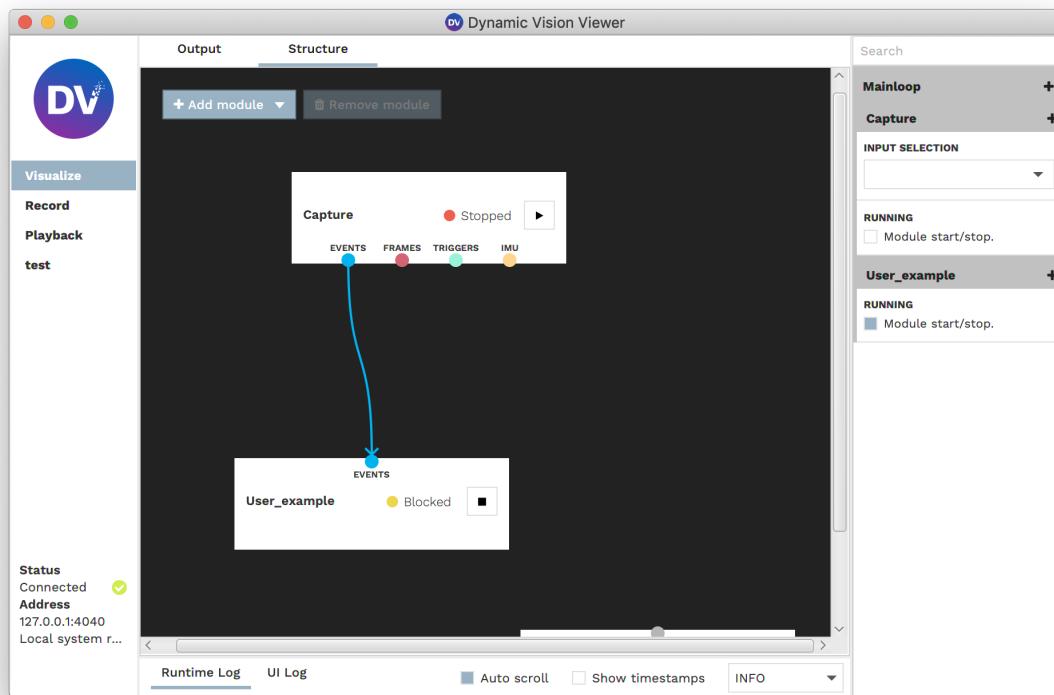

10. Click the *Play* Button on your module to start it.
11. If your module is working, you should see your expected outputs.

Adapt the module

Getting event data from an input

Event data gets passed between modules in packets. The size of event packets is decided by the interval the preceding module emits the packets. The `run` function gets executed whenever there is new data available, or, when nothing happens, periodically.

Every module has inputs. Inputs are defined in the `initInputs` function. The demo module we just compiled before, has an *events* input called “events”. To access the most recently arrived data packet on this input and iterate over the events, override the `run` function as such:

```
void run() override {
    auto inData = inputs.getEventInput("events").events();

    for (const auto &event : inData) {
        // do something with the events
    }
}
```

Getting meta data from an input

Inputs do not only provide raw data, they also provide (static) meta information, such as width and height dimensions. For example, to get the width and height of the event input, write:

```
int width = inputs.getEventInput("events").sizeX();
int height = inputs.getEventInput("events").sizeY();
```

There is a simple counting algorithm already implemented in the example project

Adding outputs

Modules can not only take data, they can also output data to subsequent modules. Module outputs are defined in the static `initOutputs` function. Since the example module we worked on so far, does not have an `initOutputs` function, we add it like so

```
static void initOutputs(dv::OutputDefinitionList &out) {
    out.addEventOutput("events");
}
```

The `out.addEventOutput("events");` line adds an output of the event type, with the name “events” to the module. Contrary to the input case, we’re not entirely done yet. Any output you define in your module has to be assigned its required meta data. For example, an event output needs to have an assigned width and height to it. It is common that you would want to setup the output with the same dimensions as an input to the module. Since the information to what is actually connected to an input is only available at run time, we do not perform the setup call in the `initOutputs` function, but rather in the classes constructor.

Since our class does not have a constructor yet, we create one like so:

```
ExampleModule() {
    outputs.getEventOutput("events").setup(inputs.getEventInput("events"));
}
```

The line in the constructor body sets up the event output named “events” to the same parameters as the event input named “events”. To set the output up with different parameters, you can call a different setup function like

```
outputs.getEventOutput("events").setup(346, 260, "Data from example module");
```

Adding config options

Config options are configurable parameters that are displayed in the gui for easy access. Config options are defined in the `initConfigOptions` function. In our example app, the `initConfigOptions` function already exists. The value of a config option can be accessed in the run function by calling `config.getInt` (or similar for other datatypes).

```
static void initConfigOptions(dv::RuntimeConfig &config) {
    config.add(
        "printInterval", dv::ConfigOption::intOption(
            "Interval in number of events between consecutive printing of the event number.", 10000));
}
```

A note on performance: Looking up the value of a config option requires an access to a hashmap with a string key. This is an efficient operation, but in case of event-by-event processing, it still adds considerable overhead. To solve this issue, one can override a function `void configUpdate()` which gets called whenever a config value is changed by the

user. Use this function to look up config values and copy them into local variables to improve performance in the `run` function. Example:

```
void configUpdate() override {
    printInterval = config.getInt("printInterval");
}
```

Example: Create a refractory period filter

The complete code for this example can be accessed at gitlab.com/inivation/dv/dv-tutorial-code⁵

Time to make our example module do something useful. A refractory period filter limits the maximum firing rate of a pixel. Whenever an event at a pixel passes through the filter, all subsequent events are discarded until the refractory period is over.

Add private data members

Let's change the private data members of our class to store the data we need to function

```
private:
    // user selectable refractory period in microseconds
    long refractoryPeriod;
    // a matrix storing the last firing times for every pixel
    dv::TimeMat lastFiringTimes;
```

The first integer `refractoryPeriod` stores a configuration value, where the user can set the refractory period to a user defined value. The second member `lastFiringTimes` is of the `dv::TimeMat` type. `dv::TimeMat` is a simple matrix type that stores a 2D array of 64bit integers. We usually use the OpenCV `Mat` types for handling 2D data. OpenCV does not provide a 64bit integer type, which is why we provide the `dv::TimeMat` type. Make sure to include

```
#include <dv-sdk/processing.hpp>
```

Set inputs and outputs

Our refractory period filter needs exactly one event input and one event output. We define them as follows:

```
static void initInputs(dv::InputDefinitionList &in) {
    in.addEventInput("events");
}

static void initOutputs(dv::OutputDefinitionList &out) {
    out.addEventOutput("events");
}
```

⁵ <https://gitlab.com/inivation/dv/dv-tutorial-code>

Set description

Let's set the description of the refractory period filter

```
static const char *initDescription() {
    return "This module filters events by applying a refractory period to the event timestamps.";
}
```

Set configuration options

Our refractory period filter should have exactly one configuration option, the option to set the refractory period. The type of the option is long and we set a default of 10ms with sensible range from 1ms to 1000ms.

```
static void initConfigOptions(dv::RuntimeConfig &config) {
    config.add(
        "refractoryPeriod", dv::ConfigOption::longOption("Refractory period to apply to events (in ms)", 10, 1, 1000));
    config.setPriorityOptions({"refractoryPeriod"});
}
```

The `setPriorityOptions` call only makes sure that the config option is exposed to the right side bar of the gui by default. If you do not specify this, you access the option in the gui by clicking on the black plus icon.

Set constructor

The job of the constructor is all about initializing private data members as well as outputs. We initialize the `lastFiringTimes` array as well as the output to the same dimensions as the `events` input.

```
ExampleModule() : refractoryPeriod(0), lastFiringTimes(inputs.getEventInput("events").size()) {
    outputs.getEventOutput("events").setup(inputs.getEventInput("events"));
}
```

Define the config update

The `configUpdate` function gets called at the start (before run) as well as whenever the config is changed. In our case, only when the user changes the `refractoryPeriod` configuration. In the function, we look up the new value and store it in the private data member. We could look up the value in the run function as well, but since config changes are quite rare, it makes sense to only do it when there is a change.

```
void configUpdate() override {
    refractoryPeriod = config.getLong("refractoryPeriod") * 1000;
}
```

We multiply the value by 1000, to convert the value from miliseconds to microseconds.

Implement run function

The `run` function is where the actual processing happens. Our refractory period filter is pretty simple:

```
void run() override {
    auto input = inputs.getEventInput("events");
    auto output = outputs.getEventOutput("events");

    for (const auto &event : input.events()) {
        if ((event.timestamp() - lastFiringTimes.at(event.y(), event.x())) >
            refractoryPeriod) {
            lastFiringTimes.at(event.y(), event.x()) = event.timestamp();
            output << event;
        }
    }
    output << dv::commit;
}
```

If the time between the current event and the last firing time at that position is larger than the refractory period, update the last firing time for that pixel and append the event to the output.

After we appended all events the output, calling `output << dv::commit;` sends the events out in a packet to the next module.

Congratulations, you built your first useful module!

The complete code for this example can be accessed at gitlab.com/inivation/dv/dv-tutorial-code⁶

Resources

- Minimal example module: gitlab.com/inivation/dv/dv-example-cpp⁷
- Module with header / code separation: gitlab.com/inivation/dv/dv-tutorial-code/-/tree/master/color-paint-example⁸

Module API

A DV module is processing unit that takes some streams as inputs, does operations on them, and outputs streams as outputs. Typically, a module takes on polarity event data, does computer vision algorithms on the data and outputs the results. Input and outputs can have arbitrary types.

Module Basics

Every DV module inherits from the `dv::ModuleBase` class. In order to register a module class (that inherits from `dv::ModuleBase`) as a DV module, the following macro has to be called at the end of the file where the class is defined:

```
registerModuleClass(RefractoryPeriodFilter)
```

⁶ <https://gitlab.com/inivation/dv/dv-tutorial-code>

⁷ <https://gitlab.com/inivation/dv/dv-example-cpp>

⁸ <https://gitlab.com/inivation/dv/dv-tutorial-code/-/tree/master/color-paint-example>

Fields

Inheriting from the this class gives access to the following fields

Field	Type	Purpose
config	dv::RuntimeConfig	Access config values from config options.
log	dv::Logger	A configured logging instance to log values to DV
inputs	dv::RuntimeInputs	Access to the inputs of the module to get data
outputs	dv::RuntimeOutputs	Access to the outputs of the module to send data

Static Methods

Every module has to provide some static methods to work properly with DV. The static methods must have the exact footprint as described in the list below. **You have to provide these methods.**

```
static const char *initDescription()
```

Return a description of what the module does **This function is required**

```
static void initInputs(dv::InputDefinitionList &in)
```

Define the inputs to the module

```
static void initOutputs(dv::OutputDefinitionList &out)
```

Define the outputs to the module

```
static void initConfigOptions(dv::RuntimeConfig &config)
```

Define configuration options for the module

Overridable Methods

dv::BaseModule exhibits two overridable functions to implement the functionality of the module.

```
void run()
```

Gets called periodically or as new data arrives. Should do the processing. **This function is required**

```
void configUpdate()
```

Gets called whenever the user changes the configuration. Used to read new configuration values and store them in instance data members.

I/O API

Inputs

Every module can have zero or more inputs, as well as outputs. Inputs take data from other modules, outputs push data to subsequent modules. Inputs and outputs preferably have one of the predefined types, but can in general take on any custom flatbuffer defined type.

The predefined types are

- Event
- Frame
- IMU
- Trigger
- BoundingBox

Input definition

Inputs can **only** be defined in the `initInputs` static function. The number of inputs as well as their types and names must be fixed for every module, and can not be changed at runtime. However, to take on a variable number of input signals, inputs can me marked as optional. In that case, the code has to check at runtime if an input is connected.

Inputs get defined in the `static void initInputs(dv::InputDefinitionList &in)` function. The argument is a modifiabable container that offers functions to add inputs of different types:

```
in.addEventInput(const std::string &name, bool optional = false)
in.addFrameInput(const std::string &name, bool optional = false)
in.addIMUIInput(const std::string &name, bool optional = false)
in.addTriggerInput(const std::string &name, bool optional = false)
in.addBoundingBoxInput(const std::string &name, bool optional = false)
```

To add an input for a custom flatbuffer type, use the following function. The type identifier is the four character type identifier string.

```
in.addInput(const std::string &name, const std::string &typeIdentifier, bool optional_
↪= false)
```

Inputs at runtime

Inputs can be accessed in constructor, run and configUpdate functions. Inheriting from `dv::ModuleBase` provides an object called `inputs`.

To retrieve an input with a known name and type, call the respective function

```
const auto input = inputs.getEventInput(const std::string &name);
const auto input = inputs.getFrameInput(const std::string &name);
const auto input = inputs.getIMUIInput(const std::string &name);
const auto input = inputs.getTriggerInput(const std::string &name);
const auto input = inputs.getBoundingBoxInput(const std::string &name);
```

To retrieve an input for a custom flatbuffer type `<T>`, call

```
const auto input = inputs.getInput<T>(const std::string &name);
```

Input APIs

Not all input types share the same information. Therefore, the APIs for the different input types differ slightly.

Events

Data

```
const auto inEvents = input.events();
```

Returns an (random access) iterable data structure of the latest events to arrive at the input. One can conveniently loop over the arrays with `for (const auto &event : input.events()) {}`.

The returned value can also be implicitly converted to a `const dv::EventStore`. It can directly be passed to any function that takes a `const dv::EventStore&`

Meta data

```
int width = input.sizeX();
int height = input.sizeY();
cv::Size size = input.size();
```

Return the width / height of the input data. The maximum x-coordinate of an event at this input is `input.sizeX() - 1`. This value depends on what module / camera is attached to the input at runtime. E.g. In case of a low-resolution *DVS128* it would be 128, in case of a high-resolution *DVS346* it would be 346. The same holds for the y-coordinate.

Frames

Frame Data

```
const auto frame = input.frame()
```

Individual Frame Meta Data

The following methods for accessing the frame contents are supported:

- `const auto &pixels = frame.pixels();` A reference to a vector type for raw pixel access
- `cv::Mat *matPtr = frame.getMatPointer();` A pointer to an *OpenCV Mat* representing this frame

Each frame has additional metadata, that can differ for each frame

- `long timestamp = frame.timestamp();` The timestamp of the frame
- `long timestamp = frame.timestampStartOfFrame();` The timestamp of the start of frame
- `long timestamp = frame.timestampEndOfFrame();` The timestamp of the end of frame
- `long timestamp = frame.timestampStartOfExposure();` The timestamp of the start of the exposure
- `long timestamp = frame.timestampEndOfExposure();` The timestamp of the end of the exposure
- `dv::FrameFormat format = frame.format();` The format of the frame. Options are *GRAY*, *BGR*, *BGRA*
- `int width = frame.sizeX();` The width of this specific frame. The width can be smaller or equal to the input width, but never larger.
- `int height = frame.sizeY();` The height of this specific frame. The height can be smaller or equal to the input height, but never larger.

Input Meta Data

```
int width = input.sizeX();
int height = input.sizeY();
cv::Size size = input.size();
```

Returns the maximum dimensions of the input. Individual frames on the input can be smaller than this, but never bigger.

IMU

Data

```
input.data()
```

Retrieved the newest data on the this input. The returned data type is (random access) iterable. A convenient way to iterate through the newest data is to call for `(const auto &sample : input.data()) {}`

Triggers

Data

```
input.data()
```

Retrieved the newest data on the this input. The returned data type is (random access) iterable. A convenient way to iterate through the newest data is to call `for (const auto &sample : input.data()) {}`

Bounding Box

Data

```
input.data()
```

Retrieved the newest data on the this input. The returned data type is (random access) iterable. A convenient way to iterate through the newest data is to call `for (const auto &boundingBox : input.data()) {}`

Input Meta Data

```
int width = input.sizeX();
int height = input.sizeY();
cv::Size size = input.size();
```

Returns the maximum dimensions of the input. A bounding box on this input is always in respect to these dimensions.

Common for all inputs

The following functions are available for all input types, including custom flatbuffer types.

```
input.isConnected()
```

For optional inputs, this function returns true iff the input is connected to an output in the current runtime.

```
input.getOriginDescription()
```

Returns a string describing the origin of the data. In most cases, this string will give some information about the original creator of the data, like serial number of the camera. However, this is not guaranteed, as every module the data passes through is allowed to alter the string it passes down in any way.

```
input.data()
```

Advanced use Retrieved the newest data on the this input. The returned data type is equivalent to a shared pointer type. Dereferencing the return value gives the flatbuffer type `<T>` of the latest data.

```
input.infoNode()
```

Advanced use Returns the underlying config trees info node about the output connected to this input. This info node provides information about dimensions etc about the input. Convenience functions such as the event inputs `sizeX` etc. are based on this information. An input of a custom flatbuffer type can have arbitrary meta information about the connection, which can be obtained from the info node. For example, to get an integer with key `sizeX` from the info node, call `input.infoNode().getInt("sizeX")`

Outputs

Output definition

Outputs can only be defined in the static `initOutputs` function. The number, names and types of outputs have to be constant during runtime.

Outputs are defined in the `static void initOutputs(dv::OutputDefinitionList &out)` function. The argument is a modifiable container that offers functions to add outputs of different types:

```
out.addEventOutput(const std::string &name)
out.addFrameOutput(const std::string &name)
out.addIMUOutput(const std::string &name)
out.addTriggerOutput(const std::string &name)
out.addBoundingBoxOutput(const std::string &name)
```

To add an output of a custom flatbuffer type, use the generic function with your custom types four-character type identifier.

```
out.addOutput(const std::string &name, const std::string &typeIdentifier)
```

Output setup

Upon initialization of your module, **outputs have to be set up in the constructor**. Setting up outputs means assigning them required meta information such as dimensions and source identifiers. In most cases, one wants to set up an output in terms of an input. For example, a filter module takes events of a certain dimension and wants to emit events with the same dimension. This is why setup takes place at initialization time, rather than static.

Event, Frame and Bounding Box outputs

```
output.setup(int sizeX, int sizeY, const std::string &originDescription)
```

Sets up the output with width `sizeX` and height `sizeY` and the supplied origin description. It is advisable to copy the origin description from an input, as the purpose of this field is to keep track of the original creator of the data.

```
output.setup(const RuntimeInput &input)
```

Sets up the output with the same parameters as a compatible input. Event, Frame and Bounding Box inputs are compatible with each other. For example, setting up a frame output with the same parameters as an Event input would look like `outputs.getFrameOutput("frames").setup(inputs.getEventInput("events"));`

Other outputs

```
output.setup(const std::string &originDescription)
```

Sets up the output with the given origin description. It is advisable to copy the origin description from an input, as the purpose of this field is to keep track of the original creator of the data.

Advanced use This is sufficient for the provided IMU and Trigger types. For a custom flatbuffer type, you may require additional information to be present in the output info config node. To set up these custom fields, put them in the output info node obtained by `output.infoNode()`

Send data to outputs

Data can be sent to outputs at any time in the run function. One can send as many data packets as needed (or none). Any sending of data has to happen on the thread where the run function runs on.

Sending data is easy. Depending on the datatype, we expose different convenience functions to use.

Events, IMU, Trigger

To send data to an output, simply stream the data to the desired output. In case of events, IMU, and trigger data, the piped data elements are first appended to an out packet. They only get sent out when piping in `dv::commit`.

```
outputs.getEventOutput("events") << event1 << event2 << dv::commit;
```

Alternatively, one can specifically obtain the the output container, append to it and commit it.

```
auto outEvents = outputs.getEventOutput("events").events();
outEvents.push_back(event1);
outEvents.push_back(event2);
outEvents.commit();
```

After committing, the output container gets reassigned and can be used again immediately after.

For IMU and Trigger outputs, one uses the `data()` function instead of the `events()` function. (The `data()` function is also available for events and functionally identical).

```
auto outIMU = outputs.getIMUOutput("imu").data();
outIMU.push_back(imu1);
outIMU.push_back(imu2);
outIMU.commit();
```

The output containers for events, IMU and trigger also have stream operator support, as

```
auto outTrigger = outputs.getTriggerOutput("trigger").data();
outTrigger << trigger1 << trigger2;
outTrigger.commit();
```

All methods are equivalent in performance.

Frames

OpenCV Frames

To send an *OpenCV* frame to an output, simply use the stream operator on the output.

```
outputs.getFrameOutput("frames") << myFrame << dv::commit;
```

OpenCV frames do not have a notion of timestamps. By default, all frames sent out this way would have a timestamp of 0. To make sure the frames on the output have timestamps, one can stream in the timestamp first.

```
outputs.getFrameOutput("frames") << timestamp << myFrame << dv::commit;
```

Alternatively, one can get the frame at the output, and use that to commit the *OpenCV* matrix manually. This is used, when one wants to set additional parameters such as exposure times.

```
auto outFrame = outputs.getFrameOutput("frames").frame();
outFrame.setTimestamp(timestamp);
outFrame.setTimestampStartOfExposure(timeStartOfExposure);
outFrame.setTimestampEndOfExposure(timeEndOfExposure);
outFrame.setMat(openCVFrame);
outFrame.commit();
```

Non-OpenCV Frames

```
// Get current output frame
auto outFrame = outputs.getFrameOutput("frames").frame();
// Setting the format and size makes the pixel buffer allocate the right amount of
// storage
outFrame.setFormat(dv::FrameFormat::BGR);
outFrame.setSize(640, 480);
// Set the timestamp
outFrame.setTimestamp(timestamp);
// .pixels gives a writable, vector compatible buffer with enough storage.
// You can write the image in there with any method
std::copy(myBuffer, outFrame.pixels());
// As soon as all the data is ready, calling commit sends the data out
outFrame.commit();
```

Non *OpenCV* frames are bit harder to send out. The idea is to generate an empty array on the output, by setting the format as well as the size. Then write the image data in the buffer obtained by `pixels()`. As soon as all the data is ready, call `commit()` to send the frame out.

Note Set the size and format before writing any data to the pixel array. After calling `commit`, one has to set the size and format again for the next frame, which gives a new array.

Configuration API

Configuration options are settings that are exposed via a network interface from DV runtime. The way configuration options are implemented, the user can change the options dynamically at runtime, either via the DV gui, or with the command line utility.

Definition of configuration options

Static vs Runtime definition

Configuration options should be added in the static function `static void initConfigOptions(dv::RuntimeConfig &config)` in your module. This static function gets executed upon adding the module to the project, but *before* it has started. The function is used to populate the configuration before starting the module.

One can add configuration options at runtime, by accessing the modules `config.add` function at runtime. This makes sense, for example, in the constructor.

Selection of config option types

The following configuration option types are available

Name	Value type	Description	GUI representation
int	32bit integer	Accepts a range	ACCUMULATION TIME 
long	64bit integer	Accepts a range	ACCUMULATION TIME 
float	32bit float	Accepts a range	ACCUMULATION TIME 
double	64bit float	Accepts a range	ACCUMULATION TIME 
bool	boolean	Displays a checkbox	BACKGROUND ACTIVITY ENABLE <input checked="" type="checkbox"/> Enable the background activity filter.
string	string	Displays an edit field	PREFIX <input type="text" value="dvSave"/>
button	boolean	Displays a button	HOT PIXEL LEARN <input type="button" value="Run"/>
fileSave	string	Shows a file save dialog	FILE <input type="file"/>
fileOpen	string	Shows a file open dialog	FILE <input type="file"/>
directory	string	Shows a directory chooser dialog	FILE <input type="file"/>
1.2. DV Modules			COMPRESSION <input type="listbox" value="LZ4_HIGH"/> LZ4_HIGH NONE LZ4

Adding a numerical option (int, long, float, double)

A numerical option can be added as follows

```
config.add(<name>, dv::ConfigOption::intOption(<description>, <defaultValue>,
    ↵<minValue>, <maxValue>))
config.add(<name>, dv::ConfigOption::longOption(<description>, <defaultValue>,
    ↵<minValue>, <maxValue>))
config.add(<name>, dv::ConfigOption::floatOption(<description>, <defaultValue>,
    ↵<minValue>, <maxValue>))
config.add(<name>, dv::ConfigOption::doubleOption(<description>, <defaultValue>,
    ↵<minValue>, <maxValue>))
```

- **name** The name of the configuration option. Should be a camel cased variable compliant name
- **description** A description of the purpose of the config option
- **defaultValue** The value this config option should get initialized with
- **minValue** The minimum allowed value for this config option. This is optional. If not set, the range defaults to the order of magnitude of the **defaultValue**
- **maxValue** The maximum allowed value for this config option. This is optional. If not set, the range defaults to the order of magnitude of the **defaultValue**

Adding a string option

```
config.add(<name>, dv::ConfigOption::stringOption(<description>, <defaultValue>))
```

- **name** The name of the configuration option. Should be a camel cased variable compliant name
- **defaultValue** The default string to be used in this option

Adding a file option

A file option without a default value can be added as follows:

```
config.add(<name>, dv::ConfigOption::fileOpenOption(<description>, <allowedExtensions>
    ↵))
config.add(<name>, dv::ConfigOption::fileSaveOption(<description>, <allowedExtensions>
    ↵))
```

A file option with a default value can be added as follows:

```
config.add(<name>, dv::ConfigOption::fileOpenOption(<description>, <defaultValue>,
    ↵<allowedExtensions>))
config.add(<name>, dv::ConfigOption::fileSaveOption(<description>, <defaultValue>,
    ↵<allowedExtensions>))
```

A directory option can be added with:

```
config.add(<name>, dv::ConfigOption::directoryOption(<description>, <defaultValue>))
```

- **name** The name of the configuration option. Should be a camel cased variable compliant name
- **defaultValue** The default file path for the option. This is optional. If not set, the default is an empty string.

- `description` A description of the purpose of the config option
- `allowedExtensions` A comma separated list of the allowed extensions. Extensions should just be the ending, without dot. E.g. jpg, jpeg, png

Adding a button option

```
config.add(<name>, dv::ConfigOption::buttonOption(<description>, <buttonLabel>))
```

- `name` The name of the configuration option. Should be a camel cased variable compliant name
- `description` A description of the purpose of the config option
- `buttonLabel` The string that should be displayed on the button

A button option has a boolean value type. By default, the value is false. As soon as a user clicks the button, the button gets disabled and the value set to true to indicate the request. To re-arm the button, reset the value back to false.

Adding a list option

```
config.add(<name>, dv::ConfigOption::listOption(<description>, <defaultChoice>, {  
    ↪<choice1>, <choice2>, ...}, <allowMultipleSelection>))
```

- `name` The name of the configuration option. Should be a camel cased variable compliant name
- `description` A description of the purpose of the config option
- `defaultChoice` The default choice for this option. This can either be a string or the index of the choice in the list of choices. In case of a string, the string has to be present in the list of choices as well.
- `{<choice1>, <choice2>, ...}` A vector of strings, denoting all possible selections for this option

Reading config options

Config values can be read easily with

```
bool value = config.getBool(<name>)
int value = config.getInt(<name>)
long value = config.getLong(<name>)
float value = config.getFloat(<name>)
double value = config.getDouble(<name>)
std::string value = config.getString(<name>)
```

The get functions are not compile time type checked. Make sure to use the correct getter function for your data type to prevent a runtime error. The correct value type for the config options can be obtained from the table above.

Validity of read values

Config option values can be read safely everywhere in the code. Outside changes to the option values are applied in between calls to the *run* and *configUpdate* functions. During the function calls, the value of config options can be seen as constant. (Unless explicitly changed in your code).

Performance considerations

Looking up a config value requires a string key lookup in a hash map. This is a very efficient operation, however, when used in a hot loop in the code, it can add overhead.

To mitigate this problem, the module api provides the opportunity to override a `void configUpdate()` function. This function, compared to the run function, only runs when a config value actually has changed. You can then copy the value of the config variable to an instance member. E.g.

```
void configUpdate() override {
    this->myConfigOption = config.getInt("myConfigOption");
}
```

During the `run` function call, one can then just use the instance member integer, rather than querying the value of the config option over and over again. E.g.

Setting config options

Config options can be set everywhere in the code. The option assumes the new value immediately after setting it. To set a config option, use the correct corresponding function

```
config.setBool(<name>, <value>
config.setInt(<name>, <value>
config.setLong(<name>, <value>
config.SetFloat(<name>, <value>
config.setDouble(<name>, <value>
config.setString(<name>, <value>
```

Again, it is important to use the correct function for the options value type. Note that by setting config options from code, you are overwriting changes the user has made to the options.

Re-enabling buttons

Buttons have a boolean value type. As long as their config option value is `false`, the button appears armed and can be clicked. Clicking the button sets the value to `true`, to indicate a click request. After performing the required action, set the value back to `false` to re-enable the button.

Example:

```
void configUpdate() override {
    // check if user has clicked the button
    if(config.getBool("myButton") {

        // do complicated action..

        // re-enable button
        config.setBool("myButton", false);
```

(continues on next page)

(continued from previous page)

```

    }
}
```

Logging API

DV offers a logging facility. Log messages get written to the DV log file (typically in `$HOME/.dv-logger.txt`), as well as published to any attached clients, such as the GUI. Logs get automatically tagged with the module name as well as the timestamp.

Accessing the log object

Every DV module class extends from `dv::ModuleBase`. This provides the module with an object called `log`, that can be accessed from everywhere in the class, including constructor and destructor.

Log levels

Every log level has a member in the `log` object. To log to the four different levels available, use

```

log.debug << "This is a debug message" << dv::logEnd;
log.info << "This is an info message" << dv::logEnd;
log.warning << "This is a warning message" << dv::logEnd;
log.error << "This is an error message" << dv::logEnd;
```

All logging methods described below, can be applied to all log levels.

Logging syntax

Simple logging

The simplest logging syntax can be achieved with

```
log.info("This is an info string");
```

DV logging accepts any type that `std::cout` accepts.

```
log.info(12);
```

Stream logging

Log messages can be streamed into the logging object. Every object that is streamed in appends to the current log message. To send the message out and start a new message, stream in `dv::logEnd`.

```
log.info << "The answer to answer is " << 42 << dv::logEnd;
```

Messages are not complete until `dv::logEnd` is streamed in

```
log.info << 1 << " + " << 1 << " = ";
log.info << (1 + 1) << dv::logEnd;
```

Formatted logging

DV supports formatting log messages with C++20's std::format syntax. Use the function `format` for this purpose

```
double mean;
double stddev;
int nSamples;

log.info.format("mean: {:.2f}, stddev: {:.2f}, samples: {}.", mean, stddev, nSamples);
```

Consult the [fmt library⁹](#) documentation for the full format syntax.

1.2.2 Create a Custom Datatype

The data transferred between DV modules is implemented as FlatBuffers. This tutorial is to show how to create a new datatype based on [FlatBuffers¹⁰](#) which can then be used to transmit data between different modules.

Prerequisites

First, the DV-runtime needs to be [installed](#) on your machine. Additionally, the following tools need to be available:

- cmake
- clang-format
- make
- bash

How-To

Getting the Schema Compiler

The precompiled binaries for the schema compiler `flatc` are located in the `dv-runtime` repository. The precompiled binaries are located in `dv-runtime/flatbuffers`. For more information on the schema compiler `flatc`, check out the official documentation: https://google.github.io/flatbuffers/flatbuffers_guide_using_schema_compiler.html

Writing the Schema

The full syntax for the schema file is documented in the following guides:

- https://google.github.io/flatbuffers/flatbuffers_guide_writing_schema.html
- https://google.github.io/flatbuffers/flatbuffers_guide_writing_schema.html

An example for a schema file is shown below:

```
native_include "dv-sdk/data/cvector.hpp";
file_identifier "PLOT";
```

(continues on next page)

⁹ <https://fmt.dev/latest/syntax.html>

¹⁰ <https://google.github.io/flatbuffers/index.html>

(continued from previous page)

```

struct Vector3D {
    x: int32;
    y: int32;
    z: int32;
}

table PlotPoint {
    // Timestamp (μs).
    timestamp: int64;
    /// Plot X coordinate.
    coord: Vector3D (native_inline);
}

table PlotPacket {
    elements: [PlotPoint] (native_inline);
}

root_type PlotPacket;

```

This schema creates a FlatBuffers `vector` which can be used as an input or output throughout the DV toolchain using the *dv-sdk*. The `vector` is of type `PlotPacket` and contains elements of type `PlotPoint`. Each `PlotPoint` contains a `timestamp` and a `Vector3D`.

Remarks Regarding the Schema

- In order for the schema to be compatible with the DV toolchain it is necessary for it to contain a variable called `timestamp` of type `int64`.
- The attribute `native_inline` is used whenever the class created by `flatc` should contain an object of the `struct` for which the attribute is dedicated. If the attribute is not present, the field will be implemented as a pointer.
- `tables` may be extended in future versions of the FlatBuffer that is created, `structs` may not.
- The `file_identifier` needs to be a string of four characters

Compiling the Schema

In order to compile the schema for use with the *dv-sdk* the following command should be used:

```

<path_to_flatc> --cpp \
    --scoped-enums \
    --gen-object-api \
    --gen-compare \
    --gen-name-strings \
    --cpp-ptr-type "std::unique_ptr" \
    --cpp-str-type "dv::cstring" \
    --cpp-str-flex-ctor \
    --cpp-vec-type "dv::cvector" \
    --reflect-types \
    --reflect-names <schema_file>.fbs

mv `basename <schema_file>`_generated.h <schema_file>_base.hpp
clang-format -i <schema_file>_base.hpp

```

For simplicity, this has been implemented in a bash script in the dv-runtime repository: flatbuffers/dv-sdk-flatc.sh (see <https://gitlab.com/invation/dv/dv-runtime/-/tree/master/flatbuffers>)

You can also just clone the dv-runtime repository instead and execute the file directly.

Using the FlatBuffer Object

Now that the <schema_file>_base.hpp object is created, it can be used with the *dv-sdk*.

The following examples show how the FlatBuffer object can be used in a Module.

Registering your Custom Type with the Module

Add the following static function to your module class.

```
static void initTypes(std::vector<dv::Types::Type> &types) {
    types.push_back(dv::Types::makeTypeDefinition<PlotPacket, PlotPoint>("A point
→ to be plotted"));
}
```

Adding the FlatBuffer Object as an Output of a Module

```
static void initOutputs(dv::OutputDefinitionList &out) {
    out.addOutput("stats", PlotPacket::TableType::identifier);
}
```

The value of PlotPacket::TableType::identifier is the four character file_identifier (in this case "PLOT").

Adding an Object to the FlatBuffer Output Vector

```
auto stats = outputs.getVectorOutput<PlotPacket, PlotPoint>("stats").data();

Vector3D vec(1, 2, 3);
PlotPoint point(<timestamp>, vec);

stats.commit();
```

Adding the FlatBuffer Object as an Input of a Module

```
static void initInputs(dv::InputDefinitionList &in) {
    in.addEventInput("stats", PlotPacket::TableType::identifier);
}
```


The value of PlotPacket::TableType::identifier is the four character file_identifier (in this case "PLOT").

Getting an Object from the FlatBuffer Input Vector

```
void run() {
    auto stats = outputs.getVectorInput<PlotPacket, PlotPoint>("stats").data();

    for(const auto &point: stats) {
        // do whatever
    }
}
```

A DV module is a piece of code that applies some sort of operation to data, usually having multiple data inputs and outputs.

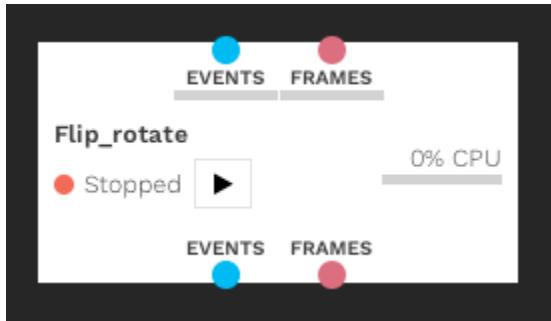

Some modules only have outputs, such as the camera or file playback modules, as they only produce new data for the framework to consume. Some modules only have inputs, such as the network or file recorder modules, as they send data outside the framework. When you want to build an application for DV, you most likely want to build a module that takes on some camera data, and outputs some measurements or visualization outputs.

Every module is essentially a CMake project, that most modern IDEs understand.

In this documentation we show you how to:

- *Create a DV Module*
- *Create a Custom Datatype* to use as input/output for modules.

1.2.3 Module Files Location

Modules are shared libraries. They are files with the extension *.so* (Linux), *.dylib* (macOS), or *.dll* (Windows). Modules library files are in:

- */usr/share/dv/modules* (Linux)
- */usr/local/share/dv/modules* or */opt/homebrew/share/dv/modules* (macOS)
- *C:\Program Files\DV\runtime\dv_modules* (Windows)

For a library to be discoverable by DV, it has to be in that directory.

dv-sdk is the library we provide to extend the provided functionalities of the DV¹¹ software or integrate other algorithms into it. It is used to create new modules that would implement new processing features or integrate existing algorithms.

In this documentation we explain how to:

- *Install the dv-sdk library*
- *Understand and Create DV Modules*

¹¹ <https://docs.inivation.com/master/software/dv/index.html>

DV-RUNTIME

2.1 Installation

Installation of `dv-runtime` is only provided on *Mac* and *Linux* systems.

2.1.1 MacOS

The easiest way to install `dv-runtime` is via Homebrew¹². We provide a Homebrew tap¹³ for macOS. Install it with:

```
brew tap inivation/inivation
brew install libcaer --with-libserialport --with-opencv
brew install dv-runtime
```

2.1.2 Linux

Ubuntu Linux

We provide a PPA repository¹⁴ for Focal (20.04 LTS) and Jammy (22.04 LTS) on the x86_64, arm64 and armhf architectures.

```
sudo add-apt-repository ppa:inivation-ppa/inivation
sudo apt-get update
sudo apt-get install dv-runtime
```

Ubuntu Bionic

We provide a separate PPA repository¹⁵ for Bionic (18.04 LTS) on the x86_64, x86, arm64 and armhf architectures.

```
sudo add-apt-repository ppa:ubuntu-toolchain-r/test
sudo add-apt-repository ppa:inivation-ppa/inivation-bionic
sudo apt-get update
sudo apt-get install dv-runtime
```

¹² <https://brew.sh/>

¹³ <https://gitlab.com/inivation/homebrew-inivation/>

¹⁴ <https://launchpad.net/~inivation-ppa/+archive/ubuntu/inivation>

¹⁵ <https://launchpad.net/~inivation-ppa/+archive/ubuntu/inivation-bionic>

Fedora Linux

We provide a COPR repository¹⁶ for Fedora 34, 35, 36 and rawhide on the x86_64, arm64 and armhf architectures.

```
sudo dnf copr enable inivation/inivation
sudo dnf install dv-runtime
```

Arch Linux

You can find `dv-runtime` as a package in the AUR repository¹⁷.

Gentoo Linux

You can find `dv-runtime` as a valid Gentoo ebuild repository available [here](#)¹⁸ over Git. The package to install is ‘dev-util/dv-runtime’.

Embedded Devices

On most embedded devices, you can follow the [*Ubuntu Linux instructions*](#).

To start a `dv-runtime` instance, you might have to set the following environment variable: `UNW_ARM_UNWIND_METHOD=4`.

Nvidia Jetson

The Nvidia Jetson embedded boards are supported via [*our Ubuntu Bionic packages*](#). The Linux for Tegra (L4T)¹⁹ distribution is based on Ubuntu Bionic (18.04 LTS), so the same installation instructions apply. One thing to note: Nvidia provides an incompatible version of OpenCV4, so you’ll first have to uninstall their version that’s pre-installed and then install the one from our PPA repository.

Raspberry Pi

Raspberry Pi is supported on the Ubuntu operating system. Ubuntu is an officially supported OS for Raspberry Pi²⁰. Please use [*our Ubuntu packages*](#).

¹⁶ <https://copr.fedorainfracloud.org/coprs/inivation/inivation/>

¹⁷ <https://aur.archlinux.org/packages/dv-runtime>

¹⁸ <https://gitlab.com/inivation/gentoo-inivation/>

¹⁹ <https://developer.nvidia.com/embedded/linux-tegra>

²⁰ <https://ubuntu.com/download/raspberry-pi>

2.2 Usage

2.2.1 dv-runtime

`dv-runtime` is an executable that launches one instance of our runtime system.

Executable options:

Option	Argument	Purpose
<code>-h</code> or <code>--help</code>	None	Print help text (this table)
<code>-v</code> or <code>--version</code>	None	Print runtime version
<code>-i</code> or <code>--ipaddr</code>	IP address (default 127.0.0.1)	Use this IP address for config-server to listen on
<code>-p</code> or <code>--port</code>	Port number (default 4040)	Use this port number for config-server to listen on
<code>-l</code> or <code>--log</code>	Path to log file (default <code>~/dv-runtime.log</code>)	Use this file to log messages from the runtime
<code>--systemservice</code>	0 or 1 (default 0)	Enable system service mode
<code>--console</code>	0 or 1 (default 1)	Log messages to the console
<code>-c</code> or <code>--config</code>	Path to xml file	Use this XML as initial configuration

Note1: Multiple instances of the runtime can be started on the same machine, but they need to be on different IP/Port combinations.

Note2: By default, `dv-runtime` will only access *modules* that are located in the *default folders*. To access modules located in different paths, one can use the following environment variable:

```
DV_MODULES_PATH=/path/to/folder/containing/your-module.so
```

2.2.2 dv-control

`dv-control` is an executable that starts a Command Line Interface used to control and modify live running instances of the runtime.

Executable options:

Option	Argument	Purpose
<code>-h</code> or <code>--help</code>	None	Print help text (this table)
<code>-i</code> or <code>--ipaddr</code>	IP address (default 127.0.0.1)	Use this IP address to connect to a runtime on this address
<code>-p</code> or <code>--port</code>	Port number (default 4040)	Use this port number to connect to a runtime on this port
<code>--tls</code>	Path to a file in the PEM format (default "")	Enable TLS for connection using the specified CA file (no argument: default CA for verification)
<code>--tlscert</code>	Path to a file in the PEM format (default "")	Uses the specified TLS key file for client authentication
<code>-s</code> or <code>--script</code>	CLI command (more details here)	Runs the provided command as if typed in the CLI, then exits

Command Line Interface

Once started, dv-control becomes a Command Line Interface.

```
→ ~ dv-control
DV @ 127.0.0.1:4040 >> █
```

The different available commands and their usages are the following:

Command	Arguments	Action
node_exists	node	Returns true if the provided node exists, else false.
attr_exists	node key	Returns true if, at the provided node, the provided key exists, else false.
get_children	node	Returns the names of all children from the provided node.
get_type	node key	Returns the type of the provided key from the provided node.
help/get_descript:	node key	Returns the description of the provided key from the provided node.
get	node key	Returns the value of the provided key from the provided node.
put/set	node key value	Sets the value of the provided key from the provided node.
add_module	name library	Adds a module from the provided library with the provided name to the structure.
remove_module	name	Removes the module with the provided name from the structure.
dump_tree	None	Send a full dump of the current configuration tree.
get_client_id	None	Get the ID of this client.
quit/exit	None	Exits the CLI.

Note1:

- node arguments are in the form of paths. Ex: /mainloop/accumulator.
- key arguments are generally attributes (written in *camelCase*) from nodes. Ex: decayParam.
- library arguments are a name of a module library. Ex: dv_accumulator.

Note2: The CLI has autocomplete, which means most of the commands, nodes and keys can be auto-completed using the tab key.

Note3: To connect the outputs of a module to the inputs of another one, one should use the following:

```
set /mainloop/receiver_module_name/inputs/input_name from sender_module_name [output_  
↳ name]
```

2.2.3 Config Server Communication

The configuration server is accessible through a TCP connection, with optional TLS v1.2 encryption and authentication support. Clients connect to the server and can then send commands and receive data back.

All communication to and from the configuration server is done using Flatbuffers²¹, a schema-based serialization protocol originally developed by Google. The following schema is used:

²¹ <https://google.github.io/flatbuffers/index.html>

```

namespace dv;

enum ConfigAction : int8 {
    CFG_ERROR          = 0,
    NODE_EXISTS        = 1,
    ATTR_EXISTS        = 2,
    GET_CHILDREN       = 3,
    GET_ATTRIBUTES     = 4,
    GET_TYPE           = 5,
    GET_RANGES          = 6,
    GET_FLAGS           = 7,
    GET_DESCRIPTION    = 8,
    GET                = 9,
    PUT                = 10,
    ADD_MODULE         = 11,
    REMOVE_MODULE      = 12,
    ADD_PUSH_CLIENT    = 13,
    REMOVE_PUSH_CLIENT = 14,
    PUSH_MESSAGE_NODE  = 15,
    PUSH_MESSAGE_ATTR   = 16,
    DUMP_TREE           = 17,
    DUMP_TREE_NODE      = 18,
    DUMP_TREE_ATTR       = 19,
    GET_CLIENT_ID       = 20
}

enum ConfigType : int8 {
    UNKNOWN            = -1,
    BOOL               = 0,
    INT                = 1,
    LONG               = 2,
    FLOAT              = 3,
    DOUBLE             = 4,
    STRING             = 5
}

enum ConfigNodeEvents : int8 {
    NODE_ADDED         = 0,
    NODE_REMOVED       = 1
}

enum ConfigAttributeEvents : int8 {
    ATTRIBUTE_ADDED    = 0,
    ATTRIBUTE_MODIFIED  = 1,
    ATTRIBUTE_REMOVED   = 2,
    ATTRIBUTE_MODIFIED_CREATE = 3
}

table ConfigActionData {
    action: ConfigAction = CFG_ERROR;
    nodeEvents: ConfigNodeEvents; // Node related.
    attrEvents: ConfigAttributeEvents; // Attribute related.
    id: uint64;
    node: string;
    key: string;
    type: ConfigType = UNKNOWN;
    value: string;
}

```

(continues on next page)

(continued from previous page)

```
// On attribute create() only.  
ranges: string;  
flags: int32;  
description: string;  
}  
  
root_type ConfigActionData;
```

The buffer content is defined in ConfigActionData. The ‘action’ member is the only one that’s required to be always set. The ConfigType, ConfigNodeEvents and ConfigAttributeEvents enums reflect the values found in the main dv::Config namespace, adapted for the Flatbuffer schema here. The ConfigAction enum defines all possible action that the configuration server can execute or respond with. The following table goes into detail of what data the client needs to send or what data he can expect back, based on the ConfigAction sent. On success, the response message will have the same action value, with possibly other additional data members set (see ‘Server to Client Response’); on failure, CFG_ERROR is returned with a string explaining the problem.

Config Action	Client to Server Message	Server to Client Response
CFG_ER-ROR	N/A (only from server due to errors).	Sent whenever an error occurs. Error message is contained in member ‘value’.
NODE_EXISTS	Check if a given ‘node’ exists.	Member ‘value’ either “true” or “false”.
ATTR_EXISTS	Check if a given ‘key’ (with optional ‘type’) exists for the given ‘node’.	Member ‘value’ either “true” or “false”.
GET_CHILDREN	Get the names of all children of a ‘node’.	Member ‘value’ contains all child node names, separated by ‘\’.
GET_ATTRIBUTES	Get the names of all attribute keys of a ‘node’.	Member ‘value’ contains all attribute key names, separated by ‘\’.
GET_ATTRIBUTE_TYPE	Get all information for the ‘key’ (with optional ‘type’) of ‘node’.	All members are filled with information on key.
PUT	Update the value for the ‘key’ (with optional ‘type’) of ‘node’, using the string member ‘value’.	No additional return value.
ADD_MODULE	Create a new module with name of ‘node’ and library of ‘key’.	No additional return value.
REMOVE_MODULE	Remove the module with name of ‘node’.	No additional return value.
ADD_PUSH_CLIENT	Add this client to the list of clients that shall receive push notifications on configuration changes. No input values.	Client ID formatted as string in ‘value’.
REMOVE_PUSH_CLIENT	Remove this client from the list of clients that shall receive push notifications on configuration changes. No input values.	No additional return value.
PUSH_CHANGE_NODE	N/A (only from SAGE_NODIFY server after ADD_PUSH_CLIENT)	Detected change on a node. ‘id’ contains the ID of the change originator (0=runtime, 1-N=connected client), ‘nodeEvents’ the kind of change, ‘node’ the path of the node that changed.
PUSH_CHANGE_ATTRIBUTE	N/A (only from SAGE_ATTRIBUTE server after ADD_PUSH_CLIENT)	Detected change on an attribute. ‘id’ contains the ID of the change originator (0=runtime, 1-N=connected client), ‘attrEvents’ the kind of change, ‘node’ the path of the node where the attribute resides, ‘key’ the name of the attribute key, ‘type’ the type of the attribute, ‘value’ the new value. On attribute addition (attrEvents=ATTRIBUTES_ADDED), the following members are also set: ‘flags’ to the current flags value, ‘ranges’ to the min/max ranges and ‘description’ to the current description (help text).
DUMP	Send a full dump of	No additional return value. Confirmation means dump is complete.

2.2. Usage

type of the attribute, ‘value’ the new value. On attribute addition (attrEvents=ATTRIBUTES_ADDED), the following members are also set: ‘flags’ to the current flags value, ‘ranges’ to the min/max ranges and ‘description’ to the current description (help text). 39

Our runtime system can be used in multiple ways:

- Via our DV GUI Software. All explanations are available on our [main documentation page²²](#).
- Via terminal. This is the focus of this documentation.
 - *dv-runtime* to launch instances of the runtime system
 - *dv-control* to control and modify live the running instances.
- Via other custom applications, using our provided *config server communication* (ADVANCED).

dv-runtime is our provided [Runtime System²³](#). It is the environment that will host the modules and take care of the threads, the memory allocation and data exchange between the modules. It is made to be used via [DV²⁴](#), but it can also be used on its own.

In this documentation we explain how to:

- *Install dv-runtime*
- *Use dv-runtime*

2.3 API

Full API documentation, automatically generated from doxygen comments.

```
template<dv::Config::AttributeType>

struct _ConfigAttributes
    #include </builds/inivation/dv/dv-runtime/include/dv-sdk/config.hpp> Maps the selected config type to a struct with
    additional config params that have to be set for the selected config type. Defaults to an empty struct.

template<>

struct _ConfigAttributes<dv::Config::AttributeType::BOOL>
```

Public Functions

```
inline _ConfigAttributes(dv::_BooleanAttributeType attributeType_, const std::string &buttonLabel_ =
                           std::string())
```

Public Members

```
dv::_BooleanAttributeType attributeType

const std::string buttonLabel

template<>

struct _ConfigAttributes<dv::Config::AttributeType::DOUBLE>
```

²² <https://docs.inivation.com/master/software/dv/gui/index.html>

²³ https://en.wikipedia.org/wiki/Runtime_system

²⁴ <https://docs.inivation.com/master/software/dv/index.html>

Public Functions

```
inline _ConfigAttributes(double minValue, double maxValue)
```

Public Members

```
dv::Config::AttributeRanges<dv::Config::AttributeType::DOUBLE> range
```

```
std::string unit
```

```
template<>
```

```
struct _ConfigAttributes<dv::Config::AttributeType::FLOAT>
```

Public Functions

```
inline _ConfigAttributes(float minValue, float maxValue)
```

Public Members

```
dv::Config::AttributeRanges<dv::Config::AttributeType::FLOAT> range
```

```
std::string unit
```

```
template<>
```

```
struct _ConfigAttributes<dv::Config::AttributeType::INT>
```

Public Functions

```
inline _ConfigAttributes(int32_t minValue, int32_t maxValue)
```

Public Members

```
dv::Config::AttributeRanges<dv::Config::AttributeType::INT> range
```

```
std::string unit
```

```
template<>
```

```
struct _ConfigAttributes<dv::Config::AttributeType::LONG>
```

Public Functions

```
inline _ConfigAttributes (int64_t minValue, int64_t maxValue)
```

Public Members

```
dv::Config::AttributeRanges<dv::Config::AttributeType::LONG> range
```

```
std::string unit
```

```
template<>
```

```
struct _ConfigAttributes<dv::Config::AttributeType::STRING>
```

Public Functions

```
inline _ConfigAttributes (int32_t minLength, int32_t maxLength, _StringAttributeType t)
```

Public Members

```
dv::Config::AttributeRanges<dv::Config::AttributeType::STRING> length
```

```
_StringAttributeType type
```

```
std::vector<std::string> listOptions
```

```
bool listAllowMultipleSelections
```

```
FileDialogMode fileMode
```

```
std::string fileAllowedExtensions
```

```
template<dv::Config::AttributeType T>
```

```
class _ConfigOption
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/config.hpp> Templated implementation class of a ConfigOption. Stores extra attributes according to the selected config type.
```

Public Functions

```
inline _ConfigOption(const std::string &description_, _AttrType initialValue_, const _ConfigAttributes<T>
&attributes_, dv::Config::AttributeFlags flags_, bool updateReadOnly_ = false)
```

Public Members

```
const std::string description
const _AttrType initialValue
const _ConfigAttributes<T> attributes
const dv::Config::AttributeFlags flags
const bool updateReadOnly
_AttrType currentValue
```

Private Types

```
using _AttrType = typename dv::Config::AttributeTypeGenerator<T>::type
template<typename T>
class _InputDataWrapperCommon
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Common parts of the implementation of an input wrapper. All specific input data wrappers for data types as well as the generic input data wrapper inherit from this.
```

Template Parameters

T – The type of the input data

Subclassed by *dv::_InputVectorDataWrapperCommon< dv::BoundingBoxPacket, dv::BoundingBox >, dv::_InputVectorDataWrapperCommon< dv::EventPacket, dv::Event >, dv::_InputVectorDataWrapperCommon< dv::IMUPacket, dv::IMU >, dv::_InputVectorDataWrapperCommon< dv::TriggerPacket, dv::Trigger >, dv::InputDataWrapper< T >, dv::_InputVectorDataWrapperCommon< T, U >*

Public Functions

```
inline explicit operator bool() const noexcept
inline std::shared_ptr<const T> getBasePointer() const noexcept
inline operator std::shared_ptr<const T>() const noexcept
```

Protected Functions

```
inline _InputDataWrapperCommon (std::shared_ptr<const T> p)
```

Protected Attributes

```
std::shared_ptr<const T> ptr
```

```
template<typename T, typename U>
```

```
class _InputVectorDataWrapperCommon : public dv::_InputDataWrapperCommon<T>, public  
dv::cvectorConstProxy<U>
```

Subclassed by *dv::InputVectorDataWrapper< T, U >*

Protected Functions

```
inline _InputVectorDataWrapperCommon (std::shared_ptr<const T> p)
```

```
template<typename T>
```

```
class _OutputDataWrapperCommon
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Common parts of the implementation  
of an output wrapper. All specific output data wrappers for data types as well as the generic output data  
wrapper inherit from this.
```

Template Parameters

T – The type of the output data

Subclassed by *dv::_OutputVectorDataWrapperCommon< dv::BoundingBoxPacket, dv::BoundingBox >, dv::_OutputVectorDataWrapperCommon< dv::EventPacket, dv::Event >, dv::_OutputVectorDataWrapperCommon< dv::IMUPacket, dv::IMU >, dv::_OutputVectorDataWrapperCommon< dv::TriggerPacket, dv::Trigger >, dv::_OutputDataWrapper< T >, dv::_OutputVectorDataWrapperCommon< T, U >*

Public Functions

```
inline _OutputDataWrapperCommon &operator= (const _InputDataWrapperCommon<T> &rhs)
```

```
inline explicit operator bool () const noexcept
```

```
inline T *getBasePointer () noexcept
```

```
inline const T *getBasePointer () const noexcept
```

```
inline void commit ()
```

```
inline _OutputDataWrapperCommon &operator<< (commitType)
```

Protected Functions

```
inline _OutputDataWrapperCommon (T *p, dvModuleData m, const std::string &n)
```

Protected Attributes

T ***ptr**

dvModuleData **moduleData**

std::string **name**

template<typename **T**, typename **U**>

class **_OutputVectorDataWrapperCommon** : public *dv::_OutputDataWrapperCommon*<*T*>, public
dv::cvectorProxy<*U*>

Subclassed by *dv::OutputVectorDataWrapper*< *T*, *U* >

Public Functions

inline void **commit** ()

inline *_OutputVectorDataWrapperCommon* &**operator<<** (*commitType*)

inline *_OutputVectorDataWrapperCommon* &**operator<<** (const *U* &*rhs*)

template<typename **K**>

inline *_OutputVectorDataWrapperCommon* &**operator<<** (const *K* &*container*)

Appends all events the iterable container to the output buffer

Parameters

container – The store with the events to be copied into the output buffer

Returns

A reference to the output buffer

Protected Functions

```
inline _OutputVectorDataWrapperCommon (T *p, dvModuleData m, const std::string &n)
```

class **_RateLimiter**

Public Functions

```
inline _RateLimiter (int32_t messageRate, int32_t perMilliseconds)  
inline bool pass ()
```

Private Members

```
float rate  
  
float allowanceLimit  
  
float allowance  
  
std::chrono::time_point<std::chrono::steady_clock> last_check  
template<typename T>  
class _RuntimeInputCommon  
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Base class for a runtime input definition. There are template-specialized subclasses of this, providing convenience function interfaces for the most common, known types. There is also a generic, templated subclass RuntimeInput which does not add any more convenience functions over this common subclass, and can be used for the generic case  
Subclassed by dv::_RuntimeVectorInputCommon< dv::BoundingBoxPacket, dv::BoundingBox >, dv::_RuntimeVectorInputCommon< dv::EventPacket, dv::Event >, dv::RuntimeInput< T >, dv::_RuntimeVectorInputCommon< T, U >
```

Public Functions

```
inline const InputDataWrapper<T> data () const  
Get data from an input  
  
Returns  
An input wrapper of the desired type, allowing data access  
  
inline bool isConnected () const  
Returns true, if this optional input is actually connected to an output of another module  
  
Returns  
true, if this input is connected  
  
inline const dv::Config::Node infoNode () const  
Returns an info node about the specified input. Can be used to determine dimensions of an input/output  
  
Returns  
A node that contains the specified inputs information, such as “sizeX” or “sizeY”  
  
inline const std::string getOriginDescription () const  
Returns the description of the origin of the data  
  
Returns  
the description of the origin of the data
```

Protected Functions

inline std::shared_ptr<const *T*> **getUnwrapped()** const

Fetches available data at the input and returns a shared_ptr to it. Also casts the shared_ptr to this particular input type.

Returns

A shared_ptr of the input data type to the latest received data

inline **_RuntimeInputCommon** (const std::string &name, *dvModuleData* moduleData)

This constructor is called by the child classes in their initialization

Parameters

- **name** – The name of this input
- **moduleData** – Pointer to the dv moduleData struct

Private Members

std::string **name_**

dvModuleData **moduleData_**

template<typename *T*>

class **_RuntimeOutputCommon**

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Base class for a runtime output. This class acts as the base for various template-specialized sub classes which provide convenience functions for outputting data in their respective data types. There is a templated generic subclass *RuntimeOutput*<*T*> that can be used for the generic case

Template Parameters

T – The flatbuffers type of the output data

Subclassed by *dv::_RuntimeVectorOutputCommon*<*dv::BoundingBoxPacket*, *dv::BoundingBox*>, *dv::_RuntimeVectorOutputCommon*<*dv::EventPacket*, *dv::Event*>, *dv::RuntimeOutput*<*T*>, *dv::_RuntimeVectorOutputCommon*<*T*, *U*>

Public Functions

inline void **setup** (const std::string &originDescription)

Sets up the output. Has to be called in the constructor of the module.

Parameters

originDescription – A description of the original creator of the data

template<typename *U*>

inline void **setup** (const *RuntimeInput*<*U*> &input)

Sets this output up with the same parameters as the supplied input.

Parameters

input – An input to copy the information from

template<typename *U*, typename *TT*>

```
inline void setup (const RuntimeVectorInput<U, TT> &input)
```

Sets this event output up with the same parameters as the supplied vector input.

Parameters

input – A vector input to copy the information from

```
inline OutputDataWrapper<T> data ()
```

Returns a writeable output wrapper for the given type of this output. Allocates new output memory if necessary. The output can be committed by calling commit on the returned object.

Returns

A wrapper to allocated output memory to write to

```
inline void operator<< (commitType)
```

Convenience shortcut to commit the data on this output directly

```
inline Dv::Config::Node infoNode ()
```

Returns an info node about the specified output, can be used to set output information.

Returns

A node that can contain output information, such as “sizeX” or “sizeY”

```
inline const Dv::Config::Node infoNode () const
```

Returns an info node about the specified output, can be used to set output information.

Returns

A node that can contain output information, such as “sizeX” or “sizeY”

```
inline const std::string getOriginDescription () const
```

Returns the description of the origin of the data

Returns

the description of the origin of the data

Protected Functions

```
inline T *allocateUnwrapped ()
```

Allocates a new instance of the datatype of this output and returns a raw pointer to the allocated memory. If there was memory allocated before (This function has been called before) but the output never has been committed, a raw pointer to the previously allocated memory gets returned.

Returns

A raw pointer to the allocated memory

```
inline void createSourceAttribute (const std::string &originDescription)
```

Creates the output information attribute in the config tree. The source attribute is a string containing information about the original generator of the data

Parameters

originDescription – a string containing information about the original generator of the data

```
inline void createSizeAttributes (int sizeX, int sizeY)
```

Adds size information attributes to the output info node

Parameters

- **sizeX** – The width dimension of the output
- **sizeY** – The height dimension of the output

```
inline _RuntimeOutputCommon (const std::string &name, dvModuleData moduleData)
```

This constructor is called by the subclasses constructors

Parameters

- **name** – The configuration name of the module this output belongs to
- **moduleData** – A pointer to the dv moduleData struct

Protected Attributes

```
std::string name_
```

```
dvModuleData moduleData_
```

```
template<typename T, typename U>
```

```
class _RuntimeVectorInputCommon : public dv::_RuntimeInputCommon<T>
```

Subclassed by *dv::RuntimeVectorInput< T, U >*

Public Functions

```
inline const InputVectorDataWrapper<T, U> data () const
```

Get data from a vector input

Returns

An input wrapper of the desired type, allowing data access

Protected Functions

```
inline _RuntimeVectorInputCommon (const std::string &name, dvModuleData moduleData)
```

```
template<typename T, typename U>
```

```
class _RuntimeVectorOutputCommon : public dv::_RuntimeOutputCommon<T>
```

Subclassed by *dv::RuntimeVectorOutput< T, U >*

Public Functions

```
inline OutputVectorDataWrapper<T, U> data ()
```

Returns a writeable output wrapper for the given type of this output. Allocates new output memory if necessary. The output can be committed by calling commit on the returned object.

Returns

A wrapper to allocated output memory to write to

```
template<typename K>
```

```
inline _RuntimeVectorOutputCommon &operator<< (const K &rhs)
```

Convenience shortcut to commit the data on this output directly This gets resolved to one of the various << functions of the data wrapper.

```
inline void operator<< (commitType)
```

Convenience shortcut to commit the data on this output directly

Protected Functions

```
inline _RuntimeVectorOutputCommon (const std::string &name, dvModuleData moduleData)  
template<AttributeType T>  
struct AttributeRangeGenerator
```

Public Types

```
using rangeType = typename AttributeTypeGenerator<T>::type  
template<>  
struct AttributeRangeGenerator<AttributeType::BOOL>
```

Public Types

```
using rangeType = int32_t  
template<>  
struct AttributeRangeGenerator<AttributeType::STRING>
```

Public Types

```
using rangeType = int32_t  
template<AttributeType T>  
struct AttributeRanges
```

Public Types

```
using rangeType = typename AttributeRangeGenerator<T>::rangeType
```

Public Functions

```
inline AttributeRanges (rangeType minVal, rangeType maxVal)  
inline AttributeRanges (const dvConfigAttributeRanges ranges)  
inline dvConfigAttributeRanges getCStruct () const
```

Public Members

rangeType **min**

rangeType **max**

template<>

struct **AttributeRanges**<*AttributeType*::*BOOL*>

Public Types

using **rangeType** = typename *AttributeRangeGenerator*<*AttributeType*::*BOOL*>::*rangeType*

Public Functions

inline **AttributeRanges** ()

inline **AttributeRanges** (const *dvConfigAttributeRanges* ranges)

inline *dvConfigAttributeRanges* **getCStruct** () const

Public Members

rangeType **min**

rangeType **max**

template<typename **T**>

struct **AttributeTypeConverter**

template<>

struct **AttributeTypeConverter**<bool>

Public Static Attributes

static constexpr *AttributeType* **type** = *AttributeType*::*BOOL*

template<>

struct **AttributeTypeConverter**<double>

Public Static Attributes

```
static constexpr AttributeType type = AttributeType::DOUBLE  
template<>  
struct AttributeTypeConverter<float>
```

Public Static Attributes

```
static constexpr AttributeType type = AttributeType::FLOAT  
template<>  
struct AttributeTypeConverter<int32_t>
```

Public Static Attributes

```
static constexpr AttributeType type = AttributeType::INT  
template<>  
struct AttributeTypeConverter<int64_t>
```

Public Static Attributes

```
static constexpr AttributeType type = AttributeType::LONG  
template<>  
struct AttributeTypeConverter<std::string>
```

Public Static Attributes

```
static constexpr AttributeType type = AttributeType::STRING  
template<AttributeType T>  
struct AttributeTypeGenerator  
template<>  
struct AttributeTypeGenerator<AttributeType::BOOL>
```

Public Types

```
using type = bool
```

Public Static Attributes

```
static enum dvConfigAttributeType underlyingType = DVCFG_TYPE_BOOL
```

```
template<>
```

```
struct AttributeTypeGenerator<AttributeType::DOUBLE>
```

Public Types

```
using type = double
```

Public Static Attributes

```
static enum dvConfigAttributeType underlyingType = DVCFG_TYPE_DOUBLE
```

```
template<>
```

```
struct AttributeTypeGenerator<AttributeType::FLOAT>
```

Public Types

```
using type = float
```

Public Static Attributes

```
static enum dvConfigAttributeType underlyingType = DVCFG_TYPE_FLOAT
```

```
template<>
```

```
struct AttributeTypeGenerator<AttributeType::INT>
```

Public Types

```
using type = int32_t
```

Public Static Attributes

```
static enum dvConfigAttributeType underlyingType = DVCFG_TYPE_INT
```

```
template<>
```

```
struct AttributeTypeGenerator<AttributeType::LONG>
```

Public Types

```
using type = int64_t
```

Public Static Attributes

```
static enum dvConfigAttributeType underlyingType = DVCFG_TYPE_LONG
```

```
template<>
```

```
struct AttributeTypeGenerator<AttributeType::STRING>
```

Public Types

```
using type = std::string
```

Public Static Attributes

```
static enum dvConfigAttributeType underlyingType = DVCFG_TYPE_STRING
```

```
template<AttributeType T>
```

```
structAttributeValue
```

Public Types

```
using valueType = typename AttributeTypeGenerator<T>::type
```

Public Functions

```
inline AttributeValue (valueType v)
inline AttributeValue (const dvConfigAttributeValue v)
inline dvConfigAttributeValue getCUunion () const
```

Public Members

valueType **value**

template<>

```
struct AttributeValue<AttributeType::STRING>
```

Public Functions

```
inline AttributeValue (const std::string_view v)
inline AttributeValue (const dvConfigAttributeValue v)
inline dvConfigAttributeValue getCUunion () const
```

Public Members

AttributeTypeGenerator<AttributeType::STRING>::type **value**

struct **commitType**

class **ConfigOption**

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/config.hpp> Non template class for a config option. Has a type independent unique pointer that points to the actual (templated) config object. Private constructor. Should only be used with static factory function.

Public Functions

inline void **setRateLimit** (int32_t messageRate, int32_t perMilliseconds)

inline *dv::Config::AttributeType* **getType** () const

Returns the type of this *ConfigOption*.

Returns

the configuration's type.

template<*dv::Config::AttributeType T*>

inline *_ConfigOption<T>* &**getConfigObject** ()

Returns the underlying config object, casted to the specified configVariant. The config variant can be read out with the *getVariant* method.

Template Parameters

T – The config variant to be casted to.

Returns

The underlying *_ConfigObject* with the configuration data

template<*dv::Config::AttributeType T*>

inline const *_ConfigOption<T>* &**getConfigObject** () const

Returns the underlying config object, casted to the specified configVariant. The config variant can be read out with the *getVariant* method.

Template Parameters

T – The config variant to be casted to.

Returns

The underlying *_ConfigObject* with the configuration data

template<*dv::Config::AttributeType T*>

inline const *dv::Config::AttributeTypeGenerator<T>*::type &**get** () const

Returns the current value of this config option. Needs a template parameter of the type *dv::ConfigVariant* : * to determine what type of config parameter to return.

Template Parameters

T – The config variant type

Returns

A simple value (long, string etc) that is the current value of the config option

template<*dv::Config::AttributeType T*>

inline void **set** (const typename *dv::Config::AttributeTypeGenerator<T>*::type &value, bool force)

Updates the current value of this config option. Needs a template parameter of the type *dv::ConfigVariant* : * to determine what type of config parameter to return. The change is propagated to the configuration tree.

Template Parameters

T – The config variant type

Parameters

- **value** – A simple value (long, string etc) to update the config option with
- **force** – Force an update of the variable (useful for statistics variables)

inline void **createAttribute** (*dv::Config::Node* moduleNode, const std::string &fullKey)

Creates a dvConfig Attribute in the dv config tree for the object.

Parameters

- **moduleNode** – the module's configuration node.
- **fullKey** – the key under which the attribute is to be stored. Forward slashes (/) can be used to get sub-nodes.

inline void **updateValue** ()

Updates the current value of the *ConfigOption* based on the value that is present in the dv config tree.

Public Static Functions

static inline *ConfigOption* **boolOption** (const std::string &description, bool defaultValue = false, bool readOnly = false)

Factory function. Creates boolean option (checkbox).

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value of the option, defaults to false
- **readOnly** – If the option is read-only, defaults to false

Returns

A *ConfigOption* Object

static inline *ConfigOption* **buttonOption** (const std::string &description, const std::string &buttonLabel)

Factory function. Creates a button option. A button is a boolean that gets set when clicked. The button gets disabled as long as the boolean value is not reset

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value of the option

Returns

A *ConfigOption* Object

static inline *ConfigOption* **intOption** (const std::string &description, int32_t defaultValue, int32_t minValue, int32_t maxValue)

Factory function. Creates a integer config option (32 bit).

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have
- **minValue** – The min value a user can choose for this option
- **maxValue** – The max value a user can choose for this option

Returns

A *ConfigOption* Object

static inline *ConfigOption* **intOption** (const std::string &description, int32_t defaultValue)

Factory function. Creates a integer config option (32 bit).

Parameters

- **description** – A description that describes the purpose of this option

- **defaultValue** – The default value that this option shall have

Returns

A *ConfigOption* Object

```
static inline ConfigOption longOption (const std::string &description, int64_t defaultValue, int64_t minValue,  
int64_t maxValue)
```

Factory function. Creates a long integer config option (64 bit).

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have
- **minValue** – The min value a user can choose for this option
- **maxValue** – The max value a user can choose for this option

Returns

A *ConfigOption* Object

```
static inline ConfigOption longOption (const std::string &description, int64_t defaultValue)
```

Factory function. Creates a long integer config option (64 bit).

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have

Returns

A *ConfigOption* Object

```
static inline ConfigOption floatOption (const std::string &description, float defaultValue, float minValue,  
float maxValue)
```

Factory function. Creates a single-precision floating point config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have
- **minValue** – The min value a user can choose for this option
- **maxValue** – The max value a user can choose for this option

Returns

A *ConfigOption* Object

```
static inline ConfigOption floatOption (const std::string &description, float defaultValue)
```

Factory function. Creates a single-precision floating point config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have

Returns

A *ConfigOption* Object

```
static inline ConfigOption doubleOption (const std::string &description, double defaultValue, double minValue, double maxValue)
```

Factory function. Creates a double-precision floating point config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have
- **minValue** – The min value a user can choose for this option
- **maxValue** – The max value a user can choose for this option

Returns

A *ConfigOption* Object

```
static inline ConfigOption doubleOption (const std::string &description, double defaultValue)
```

Factory function. Creates a double-precision floating point config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have

Returns

A *ConfigOption* Object

```
static inline ConfigOption stringOption (const std::string &description, const std::string &defaultValue)
```

Factory function. Creates a string config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have

Returns

A *ConfigOption* Object

```
static inline ConfigOption stringOption (const std::string &description, const std::string &defaultValue, int32_t minLength, int32_t maxLength)
```

Factory function. Creates a string config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default value that this option shall have
- **minValue** – The min string length a user can input
- **maxValue** – The max string length a user can input

Returns

A *ConfigOption* Object

```
static inline ConfigOption listOption (const std::string &description, size_t defaultChoice, const std::vector<std::string> &choices, bool allowMultipleSelection = false)
```

Factory function. Creates a list config option (list of strings).

Parameters

- **description** – A description that describes the purpose of this option

- **defaultChoice** – The index of the default choice, taken from the subsequent vector
- **choices** – Vector of possible choices
- **allowMultipleSelection** – whether to allow selecting multiple options at the same time

Returns

A *ConfigOption* Object

```
static inline ConfigOption listOption (const std::string &description, const std::string &defaultChoice, const std::vector<std::string> &choices, bool allowMultipleSelection = false)
```

Factory function. Creates a list config option (list of strings).

Parameters

- **description** – A description that describes the purpose of this option
- **defaultChoice** – The string of the default choice
- **choices** – Vector of possible choices
- **allowMultipleSelection** – whether to allow selecting multiple options at the same time

Returns

A *ConfigOption* Object

```
static inline ConfigOption fileOpenOption (const std::string &description)
```

Factory function. Creates a file open config option.

Parameters

description – A description that describes the purpose of this option

Returns

A *ConfigOption* Object

```
static inline ConfigOption fileOpenOption (const std::string &description, const std::string &allowedExtensions)
```

Factory function. Creates a file open config option.

Parameters

- **description** – A description that describes the purpose of this option
- **allowedExtensions** – The allowed extensions of the file to be opened

Returns

A *ConfigOption* Object

```
static inline ConfigOption fileOpenOption (const std::string &description, const std::string &defaultValue, const std::string &allowedExtensions)
```

Factory function. Creates a file open config option.

Parameters

- **description** – A description that describes the purpose of this option
- **defaultValue** – The default path of the file
- **allowedExtensions** – The allowed extensions of the file to be opened

Returns

A *ConfigOption* Object

Returns

A *ConfigOption* Object

Private Functions

inline **ConfigOption** (*dv::unique_ptr_void configOption_*, *dv::Config::AttributeType type_*)

Private constructor Takes shared_ptr to templated *_ConfigOption* as well as the variant.

Parameters

- **configOption_** – A unique_ptr to an instantiated *_ConfigOption*
- **type_** – The config variant of the passed option

inline void **setNodeAttrLink** (*dv::Config::Node moduleNode*, const std::string &fullKey)

Set link to actual node and attribute for configuration tree operations. Must be set for tree operations (create, update etc.) to work.

Parameters

- **moduleNode** – the module's configuration node.
- **fullKey** – the key under which the attribute is to be stored.

template<*dv::Config::AttributeType T*>

inline void **_updateValue** ()

Updates the current value of the *ConfigOption* based on the value that is present in the dv config tree.

Private Members

dv::unique_ptr_void configOption

dv::Config::AttributeType type

dv::Config::Node node

std::string key

std::unique_ptr<RateLimiter> rateLimit

Private Static Functions

template<*dv::Config::AttributeType T*>

static inline *ConfigOption getOption* (const std::string &description, typename

dv::Config::AttributeTypeGenerator<T>::type defaultValue, const
_ConfigAttributes<T> &attributes, *dv::Config::AttributeFlags flags*, bool
updateReadOnly = false)

Private base factory method. Used as a base for all the config factories defined Creates a new *ConfigOption* of the requested type. Works by first instantiating a *_ConfigOption* with the right templated variant, then creating a *unique_ptr* and creating a *ConfigOption* to return.

Returns

```
template<class T>

class cvectorConstProxy

Subclassed by dv::_InputVectorDataWrapperCommon< dv::BoundingBoxPacket, dv::BoundingBox >, dv::_InputVectorDataWrapperCommon< dv::EventPacket, dv::Event >, dv::_InputVectorDataWrapperCommon< dv::IMUPacket, dv::IMU >, dv::_InputVectorDataWrapperCommon< dv::TriggerPacket, dv::Trigger >, dv::cvectorProxy< dv::BoundingBox >, dv::cvectorProxy< dv::Event >, dv::cvectorProxy< dv::IMU >, dv::cvectorProxy< dv::Trigger >, dv::cvectorProxy< U >, dv::cvectorProxy< T >
```

Public Types

```
using value_type = typename cvector<T>::value_type

using const_value_type = typename cvector<T>::const_value_type

using pointer = typename cvector<T>::pointer

using const_pointer = typename cvector<T>::const_pointer

using reference = typename cvector<T>::reference

using const_reference = typename cvector<T>::const_reference

using size_type = typename cvector<T>::size_type

using difference_type = typename cvector<T>::difference_type

using iterator = typename cvector<T>::iterator

using const_iterator = typename cvector<T>::const_iterator

using reverse_iterator = typename cvector<T>::reverse_iterator

using const_reverse_iterator = typename cvector<T>::const_reverse_iterator
```

Public Functions

```
inline cvectorConstProxy (const cvector<T> *vec)

~cvectorConstProxy () = default

inline cvectorConstProxy (const cvectorConstProxy &vec)

cvectorConstProxy (cvectorConstProxy &&vec) = delete

cvectorConstProxy &operator= (const cvectorConstProxy &rhs) = delete
```

```
cvectorConstProxy &operator=(cvectorConstProxy &&rhs) = delete
inline bool operator==(const cvectorConstProxy &rhs) const noexcept
inline bool operator!=(const cvectorConstProxy &rhs) const noexcept
inline bool operator<(const cvectorConstProxy &rhs) const noexcept
inline bool operator>(const cvectorConstProxy &rhs) const noexcept
inline bool operator<=(const cvectorConstProxy &rhs) const noexcept
inline bool operator>=(const cvectorConstProxy &rhs) const noexcept
inline bool operator==(const cvector<value_type> &rhs) const noexcept
inline bool operator!=(const cvector<value_type> &rhs) const noexcept
inline bool operator<(const cvector<value_type> &rhs) const noexcept
inline bool operator>(const cvector<value_type> &rhs) const noexcept
inline bool operator<=(const cvector<value_type> &rhs) const noexcept
inline bool operator>=(const cvector<value_type> &rhs) const noexcept
inline bool operator==(const std::vector<value_type> &rhs) const noexcept
inline bool operator!=(const std::vector<value_type> &rhs) const noexcept
inline bool operator<(const std::vector<value_type> &rhs) const noexcept
inline bool operator>(const std::vector<value_type> &rhs) const noexcept
inline bool operator<=(const std::vector<value_type> &rhs) const noexcept
inline bool operator>=(const std::vector<value_type> &rhs) const noexcept
inline const_pointer data() const noexcept
inline size_type size() const noexcept
inline size_type capacity() const noexcept
inline size_type max_size() const noexcept
inline bool empty() const noexcept
template<typename INT>
inline const_reference operator[](const INT index) const
template<typename INT>
inline const_reference at(const INT index) const
inline explicit operator std::vector() const
inline const_reference front() const
inline const_reference back() const
template<typename U>
```

```

inline bool contains (const U &item) const
template<typename Pred>
inline bool containsIf (Pred predicate) const

inline const_iterator begin () const noexcept
inline const_iterator end () const noexcept
inline const_iterator cbegin () const noexcept
inline const_iterator cend () const noexcept
inline const_reverse_iterator rbegin () const noexcept
inline const_reverse_iterator rend () const noexcept
inline const_reverse_iterator crbegin () const noexcept
inline const_reverse_iterator crend () const noexcept
inline cvector<value_type> operator+ (const cvectorConstProxy &rhs) const
inline cvector<value_type> operator+ (const cvector<value_type> &rhs) const
inline cvector<value_type> operator+ (const std::vector<value_type> &rhs) const
inline cvector<value_type> operator+ (const_reference value) const
inline cvector<value_type> operator+ (std::initializer_list<value_type> rhs_list) const

```

Public Static Attributes

```
static constexpr size_type npos = {cvector<T>::npos}
```

Protected Attributes

```
cvector<T> *mVectorPtr
```

Private Static Attributes

```
static cvector<T> EMPTY_VECTOR = {}
```

Friends

```
inline friend bool operator== (const cvector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator!= (const cvector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator< (const cvector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator> (const cvector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator<= (const cvector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator>= (const cvector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator== (const std::vector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator!= (const std::vector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator< (const std::vector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator> (const std::vector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator<= (const std::vector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend bool operator>= (const std::vector<value_type> &lhs, const cvectorConstProxy &rhs) noexcept
inline friend cvector<value_type> operator+ (const cvector<value_type> &lhs, const cvectorConstProxy
&rhs)
inline friend cvector<value_type> operator+ (const std::vector<value_type> &lhs, const cvectorConstProxy
&rhs)
inline friend cvector<value_type> operator+ (const_reference value, const cvectorConstProxy &rhs)
inline friend cvector<value_type> operator+ (std::initializer_list<value_type> lhs_list, const
cvectorConstProxy &rhs)

template<class T>
class cvectorProxy : public Dv::cvectorConstProxy<T>
Subclassed by Dv::_OutputVectorDataWrapperCommon< Dv::BoundingBoxPacket, Dv::BoundingBox >, Dv::_OutputVectorDataWrapperCommon< Dv::EventPacket, Dv::Event >, Dv::_OutputVectorDataWrapperCommon< Dv::IMUPacket, Dv::IMU >, Dv::_OutputVectorDataWrapperCommon< Dv::TriggerPacket, Dv::Trigger >
```

Public Types

```
using value_type = typename cvector<T>::value_type
using const_value_type = typename cvector<T>::const_value_type
using pointer = typename cvector<T>::pointer
using const_pointer = typename cvector<T>::const_pointer
```

```

using reference = typename cvector<T>::reference

using const_reference = typename cvector<T>::const_reference

using size_type = typename cvector<T>::size_type

using difference_type = typename cvector<T>::difference_type

using iterator = typename cvector<T>::iterator

using const_iterator = typename cvector<T>::const_iterator

using reverse_iterator = typename cvector<T>::reverse_iterator

using const_reverse_iterator = typename cvector<T>::const_reverse_iterator

```

Public Functions

```

inline cvectorProxy (cvector<T> *vec)

~cvectorProxy () = default

inline void reassign (cvector<T> *vec)

inline cvectorProxy (const cvectorProxy &vec)

cvectorProxy (cvectorProxy &&vec) = delete

cvectorProxy &operator= (cvectorProxy &&rhs) = delete

inline cvectorProxy &operator= (const cvectorProxy &rhs)

inline cvectorProxy &operator= (const cvector<value_type> &rhs)

inline cvectorProxy &operator= (const std::vector<value_type> &rhs)

inline cvectorProxy &operator= (const_reference value)

inline cvectorProxy &operator= (std::initializer_list<value_type> rhs_list)

inline cvectorProxy &assign (const cvectorProxy &vec, const size_type pos = 0, const size_type count = npos)

inline cvectorProxy &assign (const cvector<value_type> &vec, const size_type pos = 0, const size_type count = npos)

inline cvectorProxy &assign (const std::vector<value_type> &vec, const size_type pos = 0, const size_type count = npos)

inline cvectorProxy &assign (const_pointer vec, const size_type vecLength, const size_type pos = 0, const size_type count = npos)

```

```
inline cvectorProxy &assign (const_reference value)

inline cvectorProxy &assign (const size_type count, const_reference value)

template<typename InputIt, std::enable_if_t<std::is_base_of_v<std::input_iterator_tag, typename std::iterator_traits<InputIt>::iterator_category>, bool> = true>
inline cvectorProxy &assign (InputIt first, InputIt last)

inline cvectorProxy &assign (std::initializer_list<value_type> init_list)

inline pointer data () noexcept

inline void resize (const size_type newSize)

inline void resize (const size_type newSize, const_reference value)

inline void reserve (const size_type minCapacity)

inline void shrink_to_fit ()

template<typename INT>
inline reference operator[] (const INT index)

template<typename INT>
inline reference at (const INT index)

inline reference front ()

inline reference back ()

inline void push_back (const_reference value)

inline void push_back (value_type &&value)

template<class ...Args>
inline reference emplace_back (Args&&... args)

inline void pop_back ()

inline void clear () noexcept

inline void swap (cvectorProxy &rhs) noexcept

inline void swap (cvector<value_type> &rhs) noexcept

inline void sortUnique ()

template<typename Compare>
inline void sortUnique (Compare comp)

template<typename U>
inline size_type remove (const U &item)

template<typename Pred>
inline size_type removeIf (Pred predicate)

inline iterator begin () noexcept

inline iterator end () noexcept
```

```

inline reverse_iterator rbegin() noexcept
inline reverse_iterator rend() noexcept
inline iterator insert(const_iterator pos, const_reference value)
inline iterator insert(const_iterator pos, value_type &&value)
inline iterator insert(const_iterator pos, const size_type count, const_reference value)
template<typename InputIt, std::enable_if_t<std::is_base_of_v<std::input_iterator_tag, typename std::iterator_traits<InputIt>::iterator_category>, bool> = true>
inline iterator insert(const_iterator pos, InputIt first, InputIt last)
inline iterator insert(const_iterator pos, std::initializer_list<value_type> init_list)

template<class ...Args>
inline iterator emplace(const_iterator pos, Args&&... args)

inline iterator erase(const_iterator pos)
inline iterator erase(const_iterator first, const_iterator last)
inline cvectorProxy &append(const cvectorProxy &vec, const size_type pos = 0, const size_type count = npos)
inline cvectorProxy &append(const cvector<value_type> &vec, const size_type pos = 0, const size_type count = npos)
inline cvectorProxy &append(const std::vector<value_type> &vec, const size_type pos = 0, const size_type count = npos)
inline cvectorProxy &append(const_pointer vec, const size_type vecLength, const size_type pos = 0, const size_type count = npos)
inline cvectorProxy &append(const_reference value)
inline cvectorProxy &append(const size_type count, const_reference value)
template<typename InputIt, std::enable_if_t<std::is_base_of_v<std::input_iterator_tag, typename std::iterator_traits<InputIt>::iterator_category>, bool> = true>
inline cvectorProxy &append(InputIt first, InputIt last)
inline cvectorProxy &append(std::initializer_list<value_type> init_list)
inline cvectorProxy &operator+=(const cvectorProxy &rhs)
inline cvectorProxy &operator+=(const cvector<value_type> &rhs)
inline cvectorProxy &operator+=(const std::vector<value_type> &rhs)
inline cvectorProxy &operator+=(const_reference value)
inline cvectorProxy &operator+=(std::initializer_list<value_type> rhs_list)

```

Public Static Attributes

```
static constexpr size_type npos = {cvector<T>::npos}
```

```
class CycleTime : public dv::statistics::Stats<float>
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/stats.hpp> Class which provides the functionality to measure statistics for cycle time related data.
```

Public Functions

```
CycleTime () = delete
```

Deleted default constructor

```
inline CycleTime (const dv::Config::Node node, const std::string_view name)
```

Constructor which selects the default window size for the underlying statistics.

The data will be published to the node `node/name/cycleTime/` if a name is specified, or ``node/cycleTime/`` if none is specified.

See also:

Stats.

See also:

Stats

Parameters

- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

```
inline CycleTime (const uint32_t windowSize, const dv::Config::Node node, const std::string_view name)
```

Constructor which applies the a custom window size for the underlying statistics.

The data will be published to the node `node/name/cycleTime/` if a name is specified, or ``node/cycleTime/`` if none is specified.

See also:

Stats.

See also:

Stats

Parameters

- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

```
CycleTime (const CycleTime &other) = delete
```

Copy - Disallow: since node and name are the same, you'd suddenly have two objects feeding data into the configuration backend and overwriting each other. This is not what you want.

```

CycleTime &operator=(const CycleTime &rhs) = delete
CycleTime (CycleTime &&other) = default
    Move
CycleTime &operator=(CycleTime &&rhs) = default
~CycleTime () noexcept = default
    Destructor
inline void start () noexcept
    Starts a measurement
inline void finish () noexcept
    Finishes a measurement and adds it to the underlying statistical accumulators

```

Private Members

```
std::chrono::time_point<std::chrono::steady_clock> mStartTime = {std::chrono::steady_clock::now()}
```

```
union dvConfigAttributeRange
```

Public Members

```

int32_t intRange

int64_t longRange

float floatRange

double doubleRange

int32_t stringRange

```

```
struct dvConfigAttributeRanges
```

Public Members

```

union dvConfigAttributeRange min

union dvConfigAttributeRange max

union dvConfigAttributeValue

```

Public Members

bool **boolean**

int32_t **iint**

int64_t **ilong**

float **ffloat**

double **ddouble**

char ***string**

struct **dvModuleDataS**

Public Members

dvConfigNode **moduleNode**

void ***moduleState**

struct **dvModuleFunctionsS**

Public Members

bool (*const **moduleStaticInit**)(*dvModuleData* moduleData)

bool (*const **moduleInit**)(*dvModuleData* moduleData)

void (*const **moduleRun**)(*dvModuleData* moduleData)

void (*const **moduleConfig**)(*dvModuleData* moduleData)

void (*const **moduleExit**)(*dvModuleData* moduleData)

struct **dvModuleInfos**

Public Members

```
int32_t version  
const char *description  
size_t memSize  
dvModuleFunctions functions  
struct dvType
```

Public Members

```
uint32_t id  
const char *identifier  
const char *description  
size_t sizeOfType  
dvTypePackFuncPtr pack  
dvTypeUnpackFuncPtr unpack  
dvTypeConstructPtr construct  
dvTypeDestructPtr destruct  
dvTypeTimeElementExtractorPtr timeElementExtractor  
dvTypeUnpackTimeElementRangeFuncPtr unpackTimeElementRange  
struct dvTypedObject
```

Public Members

```
uint32_t typeId
```

```
size_t objSize
```

```
void *obj
```

```
struct dvTypeTimeElementExtractor
```

Public Members

```
int64_t startTimestamp
```

```
int64_t endTimestamp
```

```
int64_t numElements
```

```
class Helper
```

Public Static Functions

```
static inline std::string typeToStringConverter (AttributeType type)
```

```
static inline AttributeType stringToTypeConverter (const std::string &typeString)
```

```
static inline std::string valueToStringConverter (AttributeType type, union dvConfigAttributeValue  
value)
```

```
static inline union dvConfigAttributeValue stringValueConverter (AttributeType type, const std::string  
&valueString)
```

```
static inline std::string flagsToStringConverter (int flags)
```

```
static inline int stringToFlagsConverter (const std::string &flagsString)
```

```
static inline std::string rangesToStringConverter (AttributeType type, struct dvConfigAttributeRanges  
ranges)
```

```
static inline struct dvConfigAttributeRanges stringToRangesConverter (AttributeType type, const  
std::string &rangesString)
```

```
template<typename T>
```

```
class InputDataWrapper : public dv::_InputDataWrapperCommon<T>
```

```
#include </builds/invation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Generic case input data wrapper.  
Used for all types that do not have a more specific input data wrapper.
```

Template Parameters

T – The type of the input data

Public Functions

```
inline InputDataWrapper (std::shared_ptr<const T> p)

inline const T &operator* () const noexcept

inline const T *operator-> () const noexcept

template<>

class InputDataWrapper<DV::Frame> : public DV::_InputDataWrapperCommon<DV::Frame>
```

Public Functions

inline **InputDataWrapper** (std::shared_ptr<const *DV*::Frame> p)

inline *DV*::FrameFormat **format** () const noexcept

Returns the dv frame format of the current frame

Returns

the dv frame format of the current frame

inline int16_t **sizeX** () const noexcept

The width of the current frame

Returns

the width of the current frame

inline int16_t **sizeY** () const noexcept

The height of the current frame

Returns

the height of the current frame

inline int16_t **positionX** () const noexcept

Returns the position in x of the region of interest (ROI) of the current frame

Returns

the x coordinate of the start of the region of interest

inline int16_t **positionY** () const noexcept

Returns the position in y of the region of interest (ROI) of the current frame

Returns

the y coordinate of the start of the region of interest

inline int64_t **timestamp** () const noexcept

Returns the timestamp of the start of exposure for this frame, or whatever closest value is available for this sensor.

Returns

the timestamp of the start of exposure for this frame

inline *DV*::Duration **exposure** () const noexcept

Returns the exposure time of this frame

Returns

The exposure time of this frame

```
inline int64_t timestampStartOfExposure() const noexcept
    Returns the timestamp of the start of exposure for this frame
```

Returns

the timestamp of the start of exposure for this frame

```
inline int64_t timestampEndOfExposure() const noexcept
    Returns the timestamp of the end of exposure for this frame
```

Returns

the timestamp of the end of exposure for this frame

```
inline dv::FrameSource source() const noexcept
    Returns the source (creation method) of this frame
```

Returns

The source (creation method) of this frame

```
inline std::unique_ptr<const cv::Mat> getMatPointer() const noexcept
```

Return a read-only OpenCV Mat representing this frame. It is possible to bypass the read-only restriction on a cv::Mat rather easily by dereferencing it and copy-constructor a new cv::Mat, which will point to the same data because that's how cv::Mat works. Please don't do this, it will introduce subtle and terrifying bugs.

Returns

a read-only OpenCV Mat pointer

```
inline cv::Mat getMatCopy() const noexcept
```

Return an OpenCV Mat representing a copy of this frame. Contents are freely modifiable.

Returns

an OpenCV Mat

```
inline cv::Size size() const
```

Returns the size of the current frame. This is generally the same as the input dimension, but depending on the ROI setting, can be less

Returns

The size of the current frame

```
inline cv::Point position() const
```

Returns the position of the ROI of the current frame.

Returns

The position of the start of the ROI of the current frame

```
inline cv::Rect roi() const
```

Returns the rectangle defining the region of interest of the current frame

Returns

The rectangle describing the region of interest of the current frame

```
class InputDefinition
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/module_io.hpp> Definition of a module input. Every input to a module has a unique (for the module) name, as well as a type. The type is the 4-character flatbuffers identifier
```

Public Functions

```
inline InputDefinition (const std::string &n, const std::string &t, bool opt = false)
```

Public Members

std::string **name**

std::string **typeName**

bool **optional**

class **InputDefinitionList**

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/module_io.hpp> Vector decorator that gives convenience methods to add various kinds of inputs to a module

Public Functions

```
inline void addInput (const std::string &name, const std::string &typeIdentifier, bool optional = false)
```

Adds an input of a generic type to this module.

Parameters

- **name** – The name of this input
- **typeIdentifier** – The identifier of the FlatBuffers data type used for this input
- **optional** – A flag that describes if this input is optional or not. Optional inputs are not required to be connected for successful module startup.

```
inline void addEventInput (const std::string &name, bool optional = false)
```

Adds an event data input to this module.

Parameters

- **name** – The name of the event data input
- **optional** – A flag to set this input as optional

```
inline void addFrameInput (const std::string &name, bool optional = false)
```

Adds a frame input to this module.

Parameters

- **name** – The name of the frame input
- **optional** – A flag to set this input as optional

```
inline void addIMUInput (const std::string &name, bool optional = false)
```

Adds an IMU input to this module.

Parameters

- **name** – The name of the IMU input
- **optional** – A flag to set this input as optional

```
inline void addTriggerInput (const std::string &name, bool optional = false)
```

Adds a trigger input to this module.

Parameters

- **name** – The name of the trigger input
- **optional** – A flag to set this input as optional

```
inline void addBoundingBoxInput (const std::string &name, bool optional = false)
```

Adds a bounding box input to this module.

Parameters

- **name** – The name of the bounding box input
- **optional** – A flag to set this input as optional

```
inline const std::vector<InputDefinition> &getInputs () const
```

INTERNAL USE Returns the list of configured input definitions

Returns

The list of configured input definitions

Private Members

```
std::vector<InputDefinition> inputs
```

```
template<typename T, typename U>
```

```
class InputVectorDataWrapper : public dv::_InputVectorDataWrapperCommon<T, U>
```

```
#include </builds/nivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Generic case input data wrapper for  
vector-like data (must have a dv::cvector<U> called 'elements'). Used for all vector types that do not have a more  
specific input data wrapper.
```

Template Parameters

- **T** – The type of the vector input data
- **U** – The type of the vector input data's elements

Public Functions

```
inline InputVectorDataWrapper (std::shared_ptr<const T> p)
```

```
inline const T &operator* () const noexcept
```

```
inline const T *operator-> () const noexcept
```

```
template<>
```

```
class InputVectorDataWrapper<dv::BoundingBoxPacket, dv::BoundingBox> : public  
dv::_InputVectorDataWrapperCommon<dv::BoundingBoxPacket, dv::BoundingBox>
```

Public Functions

```
inline InputVectorDataWrapper (std::shared_ptr<const dv::BoundingBoxPacket> p)
template<>
class InputVectorDataWrapper<dv::EventPacket, dv::Event> : public
dv::_InputVectorDataWrapperCommon<dv::EventPacket, dv::Event>
```

Public Functions

```
inline InputVectorDataWrapper (std::shared_ptr<const dv::EventPacket> p)
inline operator dv::EventStore () const noexcept
Conversion operator for dv::EventStore. Provides backwards compatibility, due to dv::EventStore having
stricter, explicit constructors now.
```

Returns

an EventStore sharing this input EventPacket.

```
template<>
class InputVectorDataWrapper<dv::IMUPacket, dv::IMU> : public
dv::_InputVectorDataWrapperCommon<dv::IMUPacket, dv::IMU>
```

Public Functions

```
inline InputVectorDataWrapper (std::shared_ptr<const IMUPacket> p)
template<>
```

```
class InputVectorDataWrapper<dv::TriggerPacket, dv::Trigger> : public
dv::_InputVectorDataWrapperCommon<dv::TriggerPacket, dv::Trigger>
```

Public Functions

```
inline InputVectorDataWrapper (std::shared_ptr<const dv::TriggerPacket> p)
```

```
struct logEndType
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/log.hpp> DV custom log end type. Can be piped into the
log to commit it. Eg. log.info << "Hello " << "world" << dv::logEnd.
```

```
class Logger
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/log.hpp> Logger class. This class provides logging
streams for different log levels to log to.
```

Public Members

LogStream<*dv*::logLevel::DEBUG> **debug**

LogStream<*dv*::logLevel::INFO> **info**

LogStream<*dv*::logLevel::WARNING> **warning**

LogStream<*dv*::logLevel::ERROR> **error**

template<*dv*::logLevel **L**>

class **LogStream**

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/log.hpp> *LogStream* class. To be instantiated only by *dv::Logger*. Handles the actual logging and provides functions to stream logging data in as well as to format logging strings.

Template Parameters

L – The log level for which this stream should be configured.

Public Functions

template<class **T**>

inline void **operator()** (const *T* &*val*)

Logs the given argument value.

Template Parameters

T – the type of the argument value

Parameters

val – the value to be logged

template<class **T**>

inline *LogStream* &**operator<<** (const *T* &*val*)

Appends the given argument value to the current log message. To commit a log message (write it out and flush), one can stream in *dv*::logEnd or *std*::endl.

Template Parameters

T – The type of the value to be appended to the log

Parameters

val – The value to be appended to the log

Returns

A reference to the stream, to stream in further values

inline *LogStream* &**operator<<** (*std*::ostream &(*)(*std*::ostream&))

Commits a log message upon reception of an object of the type of *std*::endl. Committing a message means writing it out and flushing the buffer.

Returns

a reference to the log stream for the reception of further values to be logged.

```
inline LogStream &operator<< (logEndType)
```

Commits a log message upon reception of `dv::logEnd`. Committing a message means writing it out and flushing the buffer.

Returns

a reference to the log stream for the reception of further values to be logged.

```
template<class T>
```

```
inline void write (const T &val)
```

Appends the given argument value to the current log message. To commit a log message (write it out and flush), one can use the function `commit()`

Template Parameters

T – The type of the value to be appended to the log

Parameters

val – The value to be appended to the log

```
inline void commit ()
```

Commits the current log message. Committing means writing the message out and flushing the buffer.

```
inline void flush ()
```

Flushes the buffer without writing out the message.

```
template<typename S, typename ...Args>
```

```
inline void format (const S &format, Args&&... args)
```

Formats the given format string with the given arguments and writes it to the log. Takes any `fmt::format` format string.

Template Parameters

- **S** – The format string type
- **Args** – The types of the arguments

Parameters

- **format** – The format string
- **args** – The argument values to be formatted

Private Members

```
std::ostringstream stream_
```

internal string stream that gets used to assemble the log message.

```
class ModuleBase
```

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/module_base.hpp> The dv `ModuleBase`. Every module shall inherit from this module. The base Module provides the following:

- Abstraction of the configuration
- Input / output management

Public Functions

inline **ModuleBase** ()

Base module constructor. The base module constructor initializes the logger and config members of the class, by utilizing the `static_thread` local pointer to the DV moduleData pointer provided prior to construction. This makes sure, that logger and config are available at the time the subclass constructor is called.

virtual ~**ModuleBase** () = default

ModuleBase (const *ModuleBase* &m) = delete

ModuleBase (*ModuleBase* &&m) = delete

ModuleBase &**operator=** (const *ModuleBase* &rhs) = delete

ModuleBase &**operator=** (*ModuleBase* &&rhs) = delete

inline void **configInternal** ()

Internal method that gets called whenever a config gets changed. It first merges the new config from the config tree into a runtime dictionary (map). After that, a user-provided function is called with which the user has the possibility to copy out config values.

inline virtual void **configUpdate** ()

Virtual function to be implemented by the user. Can be left empty. Called on configuration update, allows more advanced control of how configuration values are updated.

inline void **runInternal** ()

Internal method that gets called to run the main user code. Will call the user-provided `run()` function and then advance all input data objects by one.

virtual void **run** () = 0

Virtual function to be implemented by the user. Main function that runs the module and handles data.

Public Members

dvModuleData **moduleData**

DV low-level module data. Use it to access the low-level DV API.

Logger **log**

Loggers for the module. Each module has their own to avoid interference.

dv::Config::Node **moduleNode**

The module configuration node. Use it to access configuration at a lower level than the RuntimeConfigMap.

RuntimeConfig **config**

Allows easy access to configuration data and is automatically updated with new values on changes in the configuration tree.

RuntimeInputs **inputs**

Access data inputs and related actions in a type-safe manner.

***RuntimeOutputs* outputs**

Access data outputs and related actions in a type-safe manner.

Public Static Functions

static inline void **staticConfigInit** (*dv::Config::Node* moduleNode)

Static config init function. Calls the user provided `initConfigOptions` function which exists in this class as a static called `__getDefaultConfig`. It generates the default config and creates the elements for the default config in the DV config tree.

Parameters

`moduleNode` – The dvConfig node for which the config should be generated.

static inline void **__setStaticModuleData** (*dvModuleData* _moduleData)

INTERNAL USE ONLY Sets the static, thread local module data to be used by a subsequent constructor. This shall only be used prior to

Parameters

`_moduleData` – The moduleData param to be used for `ModuleBase` member initialization upon constructor

static inline void **__setStaticGetDefaultConfig** (void (*`_getDefaultConfig`)(*RuntimeConfig*&))

INTERNAL USE ONLY Sets the `__getDefaultConfig` static function to the user provided static function that generates the default config map. The reference to this function is used since there is no access to the child - subclass static functions possible from this class. The default config is both generated before instantiation in a call to `staticConfigInit` as well as in the constructor at runtime.

Parameters

`_getDefaultConfig` –

Private Static Attributes

static thread_local *dvModuleData* **__moduleData** = {nullptr}

moduleData and `getDefaultConfig` are thread-local to avoid race-conditions between them being initialized here as nullptr and being set in module.hpp. moduleData is different at runtime for each module and must be thread-local. `getDefaultConfig` is non-atomic and is thread-local for extra safety.

static thread_local void (***__getDefaultConfig**)(*RuntimeConfig*&)

template<class T>

class **ModuleStatics**

#include </builds/nivation/dv/dv-runtime/include/dv-sdk/module.hpp> Pure static template class that provides the static C interface functions for the module class T to be exposed to DV. It essentially wraps the the functions of the given C++ module class to the stateless functions and external state of the DV interface. Template parameter T must be a valid DV module, e.g. it has to extend `dv::ModuleBase` and provide certain static functions. Upon (static) instantiation, the `ModuleStatics` class performs static (compile time) validations to check if T is a valid module.

Template Parameters

T – A valid DV Module class that extends `dv::ModuleBase`

Public Static Functions

static inline bool **staticInit** (*dvModuleData* moduleData)

Wrapper for the `staticInit` DV function. Performs a static call to the `configInit<T>` function of `ModuleBase`, which in turn gets the config from the user defined module `T`. The config then gets parsed and injected as DvConfig nodes.

Parameters

moduleData – The DV provided moduleData.

Returns

true if static initialization succeeded, false if it failed.

static inline bool **init** (*dvModuleData* moduleData)

Wrapper for the `init` DV function. Constructs the user defined `T` module into the module state. Configuration is updated by the `ModuleBase` constructor.

Parameters

moduleData – The DV provided moduleData.

Returns

true if runtime initialization succeeded, false if it failed.

static inline void **run** (*dvModuleData* moduleData)

Wrapper for the stateless `run` DV function. Relays the call to the user defined `run` function of the user defined `T` module, which exists as the module state.

Parameters

- **moduleData** – The DV provided moduleData. Used to extract the state.
- **in** – The input data to be processed by the module.
- **out** – Pointer to the output data.

static inline void **exit** (*dvModuleData* moduleData)

Deconstructs the user defined `T` module in the state by calling its destructor.

Parameters

moduleData – The DV provided moduleData.

static inline void **config** (*dvModuleData* moduleData)

Wrapper for the DV config function. Relays the call to the stateful `configUpdate` function of the `T` module. If not overloaded by a the user, the `configUpdate` function of `ModuleBase` is called which reads out all config from the DvConfig node and updates a runtime dict of configs.

Parameters

moduleData – The moduleData provided by DV.

Public Static Attributes

static const struct *dvModuleFunctionsS* **functions** = {&*ModuleStatics*<*T*>::staticInit,
&*ModuleStatics*<*T*>::init, &*ModuleStatics*<*T*>::run, &*ModuleStatics*<*T*>::config, &*ModuleStatics*<*T*>::exit}

Static definition of the `dvModuleFunctionsS` struct. This struct gets filled with the static wrapper functions provided in this class at compile time.

Static definition of the `ModuleStatics::functions` struct. This struct contains the addresses to all the wrapper functions instantiated to the template module `T`. This struct is then passed to DV to allow it to access the functionalities inside the module.

Template Parameters

T – The user defined module. Must inherit from `dv::ModuleBase`

```
static const struct dvModuleInfoS info = {1, T::initDescription(), sizeof(T), &functions}
```

Static definition of the `dvModuleInfoS` struct. This struct gets filled with the static information from the user provided T module.

Static definition of the info struct, which gets passed to DV. DV reads this and uses the information to call into the module. It gets instantiated with the template parameter T, which has to be a valid module and inherit from `dv::ModuleBase`.

Template Parameters

T – The user defined module. Must inherit from `dv::ModuleBase`

class **Node**

Public Functions

```
inline Node (dvConfigNode n)
```

```
inline explicit operator dvConfigNode ()
```

```
inline explicit operator dvConfigNodeConst () const
```

```
inline explicit operator bool () const
```

```
inline std::string getName () const
```

```
inline std::string getPath () const
```

```
inline Node getParent () const
```

This returns a reference to a node, and as such must be carefully mediated with any `dvConfigNodeRemoveNode()` calls.

Throws

`std::out_of_range` – `Node` is root and has no parent.

```
inline std::vector<Node> getChildren () const
```

This returns a reference to a node, and as such must be carefully mediated with any `dvConfigNodeRemoveNode()` calls.

```
inline void addNodeListener (void *userData, dvConfigNodeChangeListener node_changed)
```

```
inline void removeNodeListener (void *userData, dvConfigNodeChangeListener node_changed)
```

```
inline void removeAllNodeListeners ()
```

```
inline void addAttributeListener (void *userData, dvConfigAttributeChangeListener attribute_changed)
```

```
inline void removeAttributeListener (void *userData, dvConfigAttributeChangeListener attribute_changed)
```

```
inline void removeAllAttributeListeners ()
```

```
inline void removeNode ()  
    Careful, only use if no references exist to this node and all its children. References are created by  
    dv::Config::Tree::getNode(), dv::Config::Node::getRelativeNode(), dv::Config::Node::getParent() and dv::Config::Node::getChildren().  
  
inline void removeSubTree ()  
    Careful, only use if no references exist to this node's children. References are created by dvConfigTreeGetNode(),  
    dvConfigNodeGetRelativeNode(), dvConfigNodeGetParent() and dvConfigNodeGetChildren().  
  
inline void clearSubTree (bool clearThisNode)  
  
inline void copyTo (dv::Config::Node destination) const  
  
template<AttributeType T>  
inline void createAttribute (const std::string &key, const AttributeValue<T> &defaultValue, const  
                           AttributeRanges<T> &ranges, AttributeFlags flags, const std::string  
                           &description)  
  
inline void createAttribute (const std::string &key, AttributeType type, const dvConfigAttributeValue  
                           defaultValue, const dvConfigAttributeRanges &ranges, AttributeFlags flags,  
                           const std::string &description)  
  
template<AttributeType T>  
inline void removeAttribute (const std::string &key)  
  
inline void removeAttribute (const std::string &key, AttributeType type)  
  
inline void removeAllAttributes ()  
  
template<AttributeType T>  
inline bool existsAttribute (const std::string &key) const  
  
inline bool existsAttribute (const std::string &key, AttributeType type) const  
  
template<AttributeType T>  
inline bool putAttribute (const std::string &key, const AttributeValue<T> &value)  
  
inline bool putAttribute (const std::string &key, AttributeType type, const dvConfigAttributeValue value)  
  
template<AttributeType T>  
inline AttributeValue<T> getAttribute (const std::string &key) const  
  
inline dvConfigAttributeValue getAttribute (const std::string &key, AttributeType type) const  
  
template<AttributeType T>  
inline bool updateReadOnlyAttribute (const std::string &key, const AttributeValue<T> &value)  
  
inline bool updateReadOnlyAttribute (const std::string &key, AttributeType type, const  
                                   dvConfigAttributeValue value)  
  
template<AttributeType T>  
inline void create (const std::string &key, typename AttributeTypeGenerator<T>::type defaultValue, const  
                  AttributeRanges<T> &ranges, AttributeFlags flags, const std::string &description)  
  
template<AttributeType T>  
inline void remove (const std::string &key)  
  
template<AttributeType T>
```

```

inline bool exists (const std::string &key) const

template<AttributeType T>
inline bool put (const std::string &key, typename AttributeTypeGenerator<T>::type value)

template<AttributeType T>
inline bool updateReadOnly (const std::string &key, typename AttributeTypeGenerator<T>::type value)

template<AttributeType T>
inline AttributeTypeGenerator<T>::type get (const std::string &key) const

inline bool putInt (const std::string &key, int32_t val)

inline bool putLong (const std::string &key, int64_t val)

inline bool putFloat (const std::string &key, float val)

inline bool putDouble (const std::string &key, double val)

inline bool putString (const std::string &key, const std::string &val)

inline bool putBool (const std::string &key, bool val)

inline int32_t getInt (const std::string &key) const

inline int64_t getLong (const std::string &key) const

inline float getFloat (const std::string &key) const

inline double getDouble (const std::string &key) const

inline std::string getString (const std::string &key) const

inline bool getBool (const std::string &key) const

inline bool exportNodeToXML (const std::string &filePath, bool exportAll = false) const

inline bool exportSubTreeToXML (const std::string &filePath, bool exportAll = false) const

inline bool importNodeFromXML (const std::string &filePath, bool strict = true)

inline bool importSubTreeFromXML (const std::string &filePath, bool strict = true)

inline std::string exportNodeToXMLString (bool exportAll = false) const

inline std::string exportSubTreeToXMLString (bool exportAll = false) const

inline bool importNodeFromXMLString (const std::string &xmlString, bool strict = true)

inline bool importSubTreeFromXMLString (const std::string &xmlString, bool strict = true)

inline bool stringToAttributeConverter (const std::string &key, const std::string &type, const
                                     std::string &value, bool overrideReadOnly = false)

inline std::vector<std::string> getChildNames () const

inline std::vector<std::string> getAttributeKeys () const

inline AttributeType getAttributeType (const std::string &key) const

template<AttributeType T>
```

```
inline AttributeRanges<T> getAttributeRanges (const std::string &key) const  
inline struct dvConfigAttributeRanges getAttributeRanges (const std::string &key, AttributeType type) const  
  
template<AttributeType T>  
inline int getAttributeFlags (const std::string &key) const  
  
inline int getAttributeFlags (const std::string &key, AttributeType type) const  
  
template<AttributeType T>  
inline std::string getAttributeDescription (const std::string &key) const  
  
inline std::string getAttributeDescription (const std::string &key, AttributeType type) const  
  
inline void attributeModifierButton (const std::string &key, const std::string &buttonLabel)  
  
inline void attributeModifierListOptions (const std::string &key, const std::string &listOptions, bool allowMultipleSelections)  
  
inline void attributeModifierFileChooser (const std::string &key, const std::string &typeAndExtensions)  
  
inline void attributeModifierUnit (const std::string &key, const std::string &unitInformation)  
  
inline void attributeModifierPriorityAttributes (const std::string &priorityAttributes)  
  
inline void attributeModifierGUISupport ()  
  
inline void attributeBooleanReset (const std::string &key)  
  
inline bool existsRelativeNode (const std::string &nodePath) const  
  
inline Node getRelativeNode (const std::string &relativeNodePath) const  
  
This returns a reference to a node, and as such must be carefully mediated with any dvConfigNodeRemoveNode() calls.
```

Throws

```
std::out_of_range – Invalid relative node path.
```

```
inline void attributeUpdaterAdd (const std::string &key, AttributeType type, dvConfigAttributeUpdater updater, void *updaterUserData, bool runOnce = false)  
  
inline void attributeUpdaterRemove (const std::string &key, AttributeType type, dvConfigAttributeUpdater updater, void *updaterUserData)  
  
inline void attributeUpdaterRemoveAll ()
```

Private Members

dvConfigNode **node**

```
template<typename T>
```

```
class OutputDataWrapper : public dv::OutputDataWrapperCommon<T>
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Generic case output data wrapper.
Used for all types that do not have a more specific output data wrapper.
```

Template Parameters**T** – The type of the output data**Public Functions**inline **OutputDataWrapper** (*T* **p*, *dvModuleData* *m*, const std::string &*n*)inline *T* &**operator*** () noexceptinline const *T* &**operator*** () const noexceptinline *T* ***operator->** () noexceptinline const *T* ***operator->** () const noexcept

template<>

class **OutputDataWrapper<dv::Frame>** : public *dv::OutputDataWrapperCommon<dv::Frame>***Public Functions**inline **OutputDataWrapper** (*dv::Frame* **p*, *dvModuleData* *m*, const std::string &*n*, const cv::Size *maxSize*)inline *OutputDataWrapper* &**operator=** (const *_InputDataWrapperCommon<dv::Frame>* &*rhs*)inline void **commit** ()inline *OutputDataWrapper* &**operator<<** (*dv::commitType*)inline void **setMat** (const cv::Mat &*mat*)

Copies the supplied OpenCV matrix and sends it to the output.

Parameters**mat** – The matrix to be sent to the outputinline void **setMat** (cv::Mat &&*mat*)

Moves the supplied OpenCV matrix and sends it to the output. Do not use it anymore afterwards!

Parameters**mat** – The matrix to be sent to the outputinline *OutputDataWrapper<dv::Frame>* &**operator<<** (const cv::Mat &*mat*)

Copies the supplied OpenCV matrix and sends it to the output.

Parameters**mat** – The matrix to be sent to the output**Returns**

A reference to this output, to send more data

inline *OutputDataWrapper*<*dv*::Frame> &**operator<<** (cv::Mat &&mat)

Moves the supplied OpenCV matrix and sends it to the output.

Parameters

mat – The matrix to be sent to the output

Returns

A reference to this output, to send more data

inline *dv*::FrameFormat **format** () const noexcept

Returns the dv frame format of the current frame

Returns

the dv frame format of the current frame

inline int16_t **sizeX** () const noexcept

The width of the current frame

Returns

the width of the current frame

inline int16_t **sizeY** () const noexcept

The height of the current frame

Returns

the height of the current frame

inline int16_t **positionX** () const noexcept

Returns the position in x of the region of interest (ROI) of the current frame

Returns

the x coordinate of the start of the region of interest

inline int16_t **positionY** () const noexcept

Returns the position in y of the region of interest (ROI) of the current frame

Returns

the y coordinate of the start of the region of interest

inline int64_t **timestamp** () const noexcept

Returns the timestamp of this frame (start of exposure or closest)

Returns

The timestamp of this frame (start of exposure or closest)

inline *dv*::Duration **exposure** () const noexcept

Returns the exposure time of this frame

Returns

The exposure time of this frame

inline int64_t **timestampStartOfExposure** () const noexcept

Returns the timestamp of the start of exposure for this frame

Returns

the timestamp of the start of exposure for this frame

inline int64_t **timestampEndOfExposure** () const noexcept

Returns the timestamp of the end of exposure for this frame

Returns

the timestamp of the end of exposure for this frame

```
inline dv::FrameSource source() const noexcept
    Returns the source (creation method) of this frame

Returns
    The source (creation method) of this frame

inline void setPosition(int16_t positionX, int16_t positionY) noexcept
    Sets the ROI start position for the output frame

inline void setTimestamp(int64_t timestamp) noexcept
    Sets the timestamp of the output frame (start of exposure or closest)

inline OutputDataWrapper<dv::Frame> &operator<<(int64_t timestamp)
    Sets the timestamp of the current frame on the output (start of exposure or closest).

Parameters
    timestamp – The timestamp to be set

Returns
    A reference to this data, to commit more data

inline void setExposure(const dv::Duration exposure) noexcept
    Sets the exposure of this frame

inline void setSource(const dv::FrameSource source) noexcept
    Sets the source (creation method) of this frame

inline cv::Size size() const
    Returns the size of the current frame. This is generally the same as the input dimension, but depending on
    the ROI setting, can be less

Returns
    The size of the current frame

inline cv::Point position() const
    Returns the position of the ROI of the current frame.

Returns
    The position of the start of the ROI of the current frame

inline cv::Rect roi() const
    Returns the rectangle defining the region of interest of the current frame

Returns
    The rectangle describing the region of interest of the current frame

inline void setPosition(const cv::Point &position) noexcept
    Sets the position of the ROI of the output frame.
```

Private Members

cv::Size **mMaxSize**

class **OutputDefinition**

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/module_io.hpp> Definition of a module output. Every
output has a unique (for the module) name, as well as a type. The type is the 4-character flatbuffers identifier.

Public Functions

inline **OutputDefinition** (const std::string &n, const std::string &t)

Public Members

std::string **name**

std::string **typeName**

class **OutputDefinitionList**

#include </builds/invitation/dv/dv-runtime/include/dv-sdk/module_io.hpp> Vector decorator that exposes convenience functions to add various types of outputs to a module

Public Functions

inline void **addOutput** (const std::string &name, const std::string &typeIdentifier)

Adds an output of a generic type to this module.

Parameters

- **name** – The name of this output
- **typeIdentifier** – The identifier of the FlatBuffers data type used for this input

inline void **addEventOutput** (const std::string &name)

Adds an event output to this module.

Parameters

name – The name of the event output

inline void **addFrameOutput** (const std::string &name)

Adds a frame output to this module.

Parameters

name – The name of the frame output

inline void **addIMUOutput** (const std::string &name)

Adds an IMU output to this module.

Parameters

name – The name of the IMU output

inline void **addTriggerOutput** (const std::string &name)

Adds a trigger output to this module.

Parameters

name – the name of the trigger output

inline void **addBoundingBoxOutput** (const std::string &name)

Adds a bounding box output to this module.

Parameters

name – the name of the bounding box output

```
inline const std::vector<OutputDefinition> &getOutputs() const
INTERNAL USE Returns the list of configured outputs
```

Returns

the list of configured outputs

Private Members

```
std::vector<OutputDefinition> outputs
```

```
template<typename T, typename U>
```

```
class OutputVectorDataWrapper : public dv::_OutputVectorDataWrapperCommon<T, U>
```

```
#include </builds/invitation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Generic case output vector data
wrapper for vector-like data (must have a dv::cvector<U> called ‘elements’). Used for all vector types that do
not have a more specific output data wrapper.
```

Template Parameters

- **T** – The type of the vector output data
- **U** – The type of the vector output data’s elements

Public Functions

```
inline OutputVectorDataWrapper (T *p, dvModuleData m, const std::string &n)
```

```
inline T &operator*() noexcept
```

```
inline const T &operator*() const noexcept
```

```
inline T *operator->() noexcept
```

```
inline const T *operator->() const noexcept
```

```
template<>
```

```
class OutputVectorDataWrapper<dv::BoundingBoxPacket, dv::BoundingBox> : public
dv::_OutputVectorDataWrapperCommon<dv::BoundingBoxPacket, dv::BoundingBox>
```

Public Functions

```
inline OutputVectorDataWrapper (dv::BoundingBoxPacket *p, dvModuleData m, const std::string &n)
```

```
template<>
```

```
class OutputVectorDataWrapper<dv::EventPacket, dv::Event> : public
dv::_OutputVectorDataWrapperCommon<dv::EventPacket, dv::Event>
```

Public Functions

```
inline OutputVectorDataWrapper (dv::EventPacket *p, dvModuleData m, const std::string &n, const  
cv::Size maxSize)  
  
inline OutputVectorDataWrapper &operator= (const _InputDataWrapperCommon<dv::EventPacket> &rhs)  
  
inline void commit ()  
  
inline OutputVectorDataWrapper &operator<< (dv::commitType)
```

Private Members

cv::Size **mMaxSize**

```
template<>  
  
class OutputVectorDataWrapper<dv::IMUPacket, dv::IMU> : public  
dv::_OutputVectorDataWrapperCommon<dv::IMUPacket, dv::IMU>
```

Public Functions

```
inline OutputVectorDataWrapper (IMUPacket *p, dvModuleData m, const std::string &n)  
  
template<>  
  
class OutputVectorDataWrapper<dv::TriggerPacket, dv::Trigger> : public  
dv::_OutputVectorDataWrapperCommon<dv::TriggerPacket, dv::Trigger>
```

Public Functions

```
inline OutputVectorDataWrapper (dv::TriggerPacket *p, dvModuleData m, const std::string &n)  
  
class RuntimeConfig
```

Public Functions

```
inline RuntimeConfig (dv::Config::Node mn)
```

```
inline void add (const std::string &key, ConfigOption config)
```

Adds a new configuration option to the set of config options. Configuration options can be generated using the *dv*::*ConfigOption*:: . . . factory functions. The key is the name of the config option and has to be a name that complies with the specifications of a C variable name.

Parameters

- **key** – The key or name of this config option. Camel case C compliant name
- **config** – The config object. Use *dv*::*ConfigOption*:: . . . factory functions to generate them

```
inline void setPriorityOptions (const std::vector<std::string> &priorityAttributes)
```

Sets the priority options for this module. The priority options for the module are the options that are shown to the user in the gui in the sidebar, without having to click on the plus sign. Priority options should be the list of the most important options.

Parameters

- **priorityAttributes** – The list of the keys of the most important configuration options

```
template<dv::Config::AttributeType T>
```

```
inline const dv::Config::AttributeTypeGenerator<T>::type &get (const std::string &key) const
```

Returns the current value of this configuration option that is stored under the given key. This is the templated generic function, there are overloaded helper functions available for all supported types

Template Parameters

- **T** – The AttributeType type of the attribute

Parameters

- **key** – The name under which this configuration option is stored

Returns

- The currently stored value of this configuration option

```
template<dv::Config::AttributeType T>
```

```
inline void set (const std::string &key, const typename dv::Config::AttributeTypeGenerator<T>::type &value,  
    bool force = false)
```

Sets the configuration option under the given name to the provided value. Requires the attribute type as a template argument. There are non-templated convenience functions available for all supported attribute types. Note that this function is only guaranteed when called within `configUpdate`, calling it outside of `configUpdate`, the behaviour is undefined.

Template Parameters

- **T** – The type of the attribute

Parameters

- **key** – The name under which this configuration option is stored
- **value** – The value to be stored under the config options
- **force** – Force an update of the variable (useful for statistics variables)

```
inline void update ()
```

```
inline void setBool (const std::string &key, bool value)
```

Sets the value of a bool config option. Note that this function is only guaranteed when called in the `configUpdate` function. Calling it outside of it can result in undefined behaviour

Parameters

- **key** – The key of the config option
- **value** – The value to be set

```
inline void setInt (const std::string &key, int32_t value)
```

Sets the value of an int config option. Note that this function is only guaranteed when called in the `configUpdate` function. Calling it outside of it can result in undefined behaviour

Parameters

- **key** – The key of the config option
- **value** – The value to be set

```
inline void setLong (const std::string &key, int64_t value)
```

Sets the value of a long config option. Note that this function is only guaranteed when called in the `configUpdate` function. Calling it outside of it can result in undefined behaviour

Parameters

- **key** – The key of the config option
- **value** – The value to be set

```
inline void setFloat (const std::string &key, float value)
```

Sets the value of a float config option. Note that this function is only guaranteed when called in the `configUpdate` function. Calling it outside of it can result in undefined behaviour

Parameters

- **key** – The key of the config option
- **value** – The value to be set

```
inline void setDouble (const std::string &key, double value)
```

Sets the value of a double config option. Note that this function is only guaranteed when called in the `configUpdate` function. Calling it outside of it can result in undefined behaviour

Parameters

- **key** – The key of the config option
- **value** – The value to be set

```
inline void setString (const std::string &key, const std::string &value)
```

Sets the value of an int config option. Note that this function is only guaranteed when called in the `configUpdate` function. Calling it outside of it can result in undefined behaviour

Parameters

- **key** – The key of the config option
- **value** – The value to be set

```
inline bool getBool (const std::string &key) const
```

Returns the value of the config option with the given key. Note that this function will only work if the type of the option is actually `bool`

Parameters

key – the key of the option to look up

Returns

the value of the option

```
inline int32_t getInt (const std::string &key) const
```

Returns the value of the config option with the given key. Note that this function will only work if the type of the option is actually `int`

Parameters

key – the key of the option to look up

Returns

the value of the option

```
inline int64_t getLong (const std::string &key) const
```

Returns the value of the config option with the given key. Note that this function will only work if the type of the option is actually `long`

Parameters

key – the key of the option to look up

Returns

the value of the option

```
inline float getFloat (const std::string &key) const
```

Returns the value of the config option with the given key. Note that this function will only work if the type of the option is actually float

Parameters

key – the key of the option to look up

Returns

the value of the option

```
inline double getDouble (const std::string &key) const
```

Returns the value of the config option with the given key. Note that this function will only work if the type of the option is actually double

Parameters

key – the key of the option to look up

Returns

the value of the option

```
inline const std::string &getString (const std::string &key) const
```

Returns the value of the config option with the given key. Note that this function will only work if the type of the option is actually string

Parameters

key – the key of the option to look up

Returns

the value of the option

```
inline void set (const std::string &key, bool value)
```

```
inline void set (const std::string &key, int32_t value)
```

```
inline void set (const std::string &key, uint32_t value)
```

```
inline void set (const std::string &key, int64_t value)
```

```
inline void set (const std::string &key, uint64_t value)
```

```
inline void set (const std::string &key, float value)
```

```
inline void set (const std::string &key, double value)
```

```
inline void set (const std::string &key, const std::string &value)
```

```
inline void get (const std::string &key, bool &value) const
```

```
inline void get (const std::string &key, int32_t &value) const
```

```
inline void get (const std::string &key, uint32_t &value) const
```

```
inline void get (const std::string &key, int64_t &value) const
```

```
inline void get (const std::string &key, uint64_t &value) const
```

```
inline void get (const std::string &key, float &value) const  
inline void get (const std::string &key, double &value) const  
inline void get (const std::string &key, std::string &value) const
```

Private Members

```
std::unordered_map<std::string, ConfigOptionconfigMap
```

```
dv::Config::Node moduleNode
```

```
template<typename T>
```

```
class RuntimeInput : public dv::_RuntimeInputCommon<T>
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Describes a generic input at runtime.  
A generic input can be instantiated for any type. This class basically just inherits from _RuntimeInputCommon<T> and does not add any specializations.
```

Template Parameters

T – The type of the input data

Public Functions

```
inline RuntimeInput (const std::string &name, dvModuleData moduleData)
```

```
template<>
```

```
class RuntimeInput<dv::Frame> : public dv::_RuntimeInputCommon<dv::Frame>
```

Public Functions

```
inline RuntimeInput (const std::string &name, dvModuleData moduleData)
```

```
inline const InputDataWrapper<dv::Frame> frame () const
```

```
inline int sizeX () const
```

```
inline int sizeY () const
```

```
inline const cv::Size size () const
```

```
class RuntimeInputs
```

Public Functions

inline **RuntimeInputs** (*dvModuleData* m)

template<typename **T**>

inline const *RuntimeInput*<**T**> **getInput** (const std::string &name) const

Returns the information about the input with the specified name. The type of the input has to be specified as well.

Template Parameters

T – The type of the input

Parameters

name – The name of the input

Returns

An object to access the information about the input

template<typename **T**, typename **U**>

inline const *RuntimeVectorInput*<**T**, **U**> **getVectorInput** (const std::string &name) const

Returns the information about the vector input with the specified name. The type of the vector input has to be specified as well.

Template Parameters

- **T** – The type of the vector input
- **U** – The type of the vector input's elements

Parameters

name – The name of the input

Returns

An object to access the information about the input

inline const *RuntimeVectorInput*<*dv*::EventPacket, *dv*::Event> **getEventInput** (const std::string &name) const

(Convenience) Function to get an event input

Parameters

name – the name of the event input stream

Returns

An object to access information about the input stream

inline const *RuntimeInput*<*dv*::Frame> **getFrameInput** (const std::string &name) const

(Convenience) Function to get an frame input

Parameters

name – the name of the frame input stream

Returns

An object to access information about the input stream

inline const *RuntimeVectorInput*<*dv*::IMUPacket, *dv*::IMU> **getIMUInput** (const std::string &name) const

(Convenience) Function to get an IMU input

Parameters

name – the name of the IMU input stream

Returns

An object to access information about the input stream

```
inline const RuntimeVectorInput<dv::TriggerPacket, dv::Trigger> getTriggerInput (const std::string  
&name) const
```

(Convenience) Function to get an trigger input

Parameters

name – the name of the trigger input stream

Returns

An object to access information about the input stream

```
inline const RuntimeVectorInput<dv::BoundingBoxPacket, dv::BoundingBox> getBoundingBoxInput (const  
std::string  
&name)  
const
```

(Convenience) Function to get an boundingBox input

Parameters

name – the name of the boundingBox input stream

Returns

An object to access information about the input stream

```
inline const dv::Config::Node infoNode (const std::string &name) const
```

Returns an info node about the specified input. Can be used to determine dimensions of an input/output

Returns

A node that contains the specified inputs information, such as “sizeX” or “sizeY”

```
inline bool isConnected (const std::string &name) const
```

Returns true, if this optional input is actually connected to an output of another module

Returns

true, if this input is connected

Private Members

dvModuleData **moduleData**

```
template<typename T>
```

```
class RuntimeOutput : public dv::_RuntimeOutputCommon<T>
```

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Class that describes an output of a  
generic type at runtime. Can be used to obtain information about the output, as well as getting a new output object  
to send data to.
```

Template Parameters

T – The type of the output data

Public Functions

```
inline RuntimeOutput (const std::string &name, dvModuleData moduleData)
template<>

class RuntimeOutput<dv::Frame> : public dv::_RuntimeOutputCommon<dv::Frame>
#include </builds/nivation/dv/dv-runtime/include/dv-sdk/data/frame.hpp> Specialization of the runtime output for
frame outputs Provides convenience setup functions for setting up the frame output
```

Public Functions

```
inline RuntimeOutput (const std::string &name, dvModuleData moduleData)
```

```
inline OutputDataWrapper<dv::Frame> data ()
```

Returns a writeable output wrapper for the given type of this output. Allocates new output memory if necessary. The output can be committed by calling commit on the returned object.

Returns

A wrapper to allocated output memory to write to

```
inline OutputDataWrapper<dv::Frame> frame ()
```

Returns the current output frame to set up values and to get the back data buffer

Returns

The output frame to set up

```
void setup (const std::string &originDescription) = delete
```

```
inline void setup (int sizeX, int sizeY, const std::string &originDescription)
```

Sets up this frame output with the provided parameters

Parameters

- **sizeX** – The width of the frames supplied on this output
- **sizeY** – The height of the frames supplied on this output
- **originDescription** – A description of the original creator of the data

```
template<typename U>
```

```
inline void setup (const RuntimeInput<U> &input)
```

Sets this frame output up with the same parameters the the supplied input.

Parameters

input – An input to copy the data from

```
template<typename U, typename TT>
```

```
inline void setup (const RuntimeVectorInput<U, TT> &input)
```

Sets this frame output up with the same parameters as the supplied vector input.

Parameters

input – A vector input to copy the information from

```
inline int sizeX () const
```

```
inline int sizeY () const
```

```
inline const cv::Size size () const
```

```
inline void operator<< (dv::commitType)
    Convenience shortcut to commit the data on this output directly

inline RuntimeOutput<dv::Frame> &operator<< (int64_t timestamp)
    Sets the timestamp of the current frame on the output (start of exposure or closest).

Parameters
    timestamp – The timestamp to be set

Returns
    A reference to this output, to commit more data

inline RuntimeOutput<dv::Frame> &operator<< (const cv::Mat &mat)
    Convenience shorthand to commit an OpenCV mat onto this output. If not using this function, call data()
    to get an output frame to fill into.

Parameters
    mat – The OpenCV Mat to submit

Returns
    A reference to the this

inline RuntimeOutput<dv::Frame> &operator<< (cv::Mat &&mat)
    Convenience shorthand to commit an OpenCV mat onto this output. If not using this function, call data()
    to get an output frame to fill into.

Parameters
    mat – The OpenCV Mat to submit

Returns
    A reference to the this
```

```
class RuntimeOutputs
```

Public Functions

```
inline RuntimeOutputs (dvModuleData m)

template<typename T>
inline RuntimeOutput<T> getOutput (const std::string &name)
    Function to get an output

Parameters
    name – the name of the output stream

Returns
    An object to access the modules output

template<typename T, typename U>
inline RuntimeVectorOutput<T, U> getVectorOutput (const std::string &name)
    Function to get a vector output

Parameters
    name – the name of the output stream

Returns
    An object to access the modules output
```

inline *RuntimeVectorOutput*<*dv*::EventPacket, *dv*::Event> **getEventOutput** (const std::string &name)
(Convenience) Function to get an event output

Parameters

name – the name of the event output stream

Returns

An object to access the modules output

inline *RuntimeOutput*<*dv::Frame*> **getFrameOutput** (const std::string &name)
(Convenience) Function to get an frame output

Parameters

name – the name of the frame output stream

Returns

An object to access the modules output

inline *RuntimeVectorOutput*<*dv*::IMUPacket, *dv*::IMU> **getIMUOutput** (const std::string &name)
(Convenience) Function to get an imu output

Parameters

name – the name of the imu output stream

Returns

An object to access the modules output

inline *RuntimeVectorOutput*<*dv*::TriggerPacket, *dv*::Trigger> **getTriggerOutput** (const std::string &name)
(Convenience) Function to get an trigger output

Parameters

name – the name of the trigger output stream

Returns

An object to access the modules output

inline *RuntimeVectorOutput*<*dv::BoundingBoxPacket*, *dv::BoundingBox*> **getBoundingBoxOutput** (const std::string &name)

Parameters

name – the name of the trigger output stream

Returns

An object to access the modules output

```
inline dv::Config::Node infoNode(const std::string &name)
```

Returns an info node about the specified output, can be used to get output information.

Returns

A node that can contain output information, such as “sizeX” or “sizeY”

Private Members

`dvModuleData moduleData`

template<typename **T**, typename **U**>

class **RuntimeVectorInput** : public `dv::_RuntimeVectorInputCommon<T, U>`

`#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp>` Describes a generic vector input at runtime. A generic vecotr input can be instantiated for any vector type (a type with a member called ‘elements’ of type `dv::cvector<U>`). This class basically just inherits from `_RuntimeInputCommon<T>` and does not add any specializations.

Template Parameters

- **T** – The type of the vector input data
- **U** – The type of the vector input data’s elements

Public Functions

inline **RuntimeVectorInput** (const std::string &name, `dvModuleData` moduleData)

template<>

class **RuntimeVectorInput**<`dv::BoundingBoxPacket`, `dv::BoundingBox`> : public
`dv::_RuntimeVectorInputCommon<dv::BoundingBoxPacket, dv::BoundingBox>`

`#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/bounding_box.hpp>` Describes an input for bounding boxes. Offers convenience functions to obtain informations about the bounding box sizes as well as to get the data.

Public Functions

inline **RuntimeVectorInput** (const std::string &name, `dvModuleData` moduleData)

inline int **sizeX** () const

Returns

The width of the input region in pixels. Any event on this input will have a x-coordinate smaller than the return value of this function.

inline int **sizeY** () const

Returns

The height of the input region in pixels. Any event on this input will have a y-coordinate smaller than the return value of this function

inline const cv::Size **size** () const

Returns

the input region size in pixels as an OpenCV size object

template<>

class **RuntimeVectorInput**<`dv::EventPacket`, `dv::Event`> : public
`dv::_RuntimeVectorInputCommon<dv::EventPacket, dv::Event>`

`#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/event.hpp>` Describes an input for event packets. Offers convenience functions to obtain informations about the event input as well as to get the event data.

Public Functions

inline **RuntimeVectorInput** (const std::string &name, *dvModuleData* moduleData)

inline const *InputVectorDataWrapper*<*dv*::EventPacket, *dv*::Event> **events** () const

Returns an iterable container of the latest events that arrived at this input.

Returns

An iterable container of the newest events.

inline int **sizeX** () const

Returns

The width of the input region in pixels. Any event on this input will have a x-coordinate smaller than the return value of this function.

inline int **sizeY** () const

Returns

The height of the input region in pixels. Any event on this input will have a y-coordinate smaller than the return value of this function

inline *dv*::EventColor **colorForEvent** (const *dv*::Event &evt) const

Determine the color of the Bayer color filter for a specific event, based on its address. WHITE means White/No Filter. Please take into account that there are usually twice as many green pixels as there are red or blue ones.

Parameters

evt – event to determine filter color for.

Returns

filter color.

inline const cv::Size **size** () const

Returns

the input region size in pixels as an OpenCV size object

Private Members

int **colorIndex** = -1

template<typename **T**, typename **U**>

class **RuntimeVectorOutput** : public *dv*::_RuntimeVectorOutputCommon<**T**, **U**>

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/wrappers.hpp> Class that describes an output of a generic vector type at runtime. A generic vector input can be instantiated for any vector type (a type with a member called 'elements' of type *dv*::cvvector<**U**>). Can be used to obtain information about the output, as well as getting a new output object to send data to.

Template Parameters

- **T** – The type of the vector output data
- **U** – The type of the vector output data's elements

Public Functions

```
inline RuntimeVectorOutput (const std::string &name, dvModuleData moduleData)
template<>
class RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox> : public
dv::_RuntimeVectorOutputCommon<dv::BoundingBoxPacket, dv::BoundingBox>
#include </builds/finvation/dv/dv-runtime/include/dv-sdk/data/bounding_box.hpp> Specialization of the runtime
output for bounding boxes. Provides convenience setup functions for setting up the bounding boxes output.
```

Public Functions

```
inline RuntimeVectorOutput (const std::string &name, dvModuleData moduleData)
```

```
void setup (const std::string &originDescription) = delete
```

```
inline void setup (int sizeX, int sizeY, const std::string &originDescription)
```

Sets up this bounding boxes output by setting the provided arguments to the output info node

Parameters

- **sizeX** – The width of this output
- **sizeY** – The height of this output
- **originDescription** – A description that describes the original generator of the data

```
template<typename U>
```

```
inline void setup (const RuntimeInput<U> &input)
```

Sets this bounding box output up with the same parameters as the supplied input.

Parameters

input – An input to copy the information from

```
template<typename U, typename TT>
```

```
inline void setup (const RuntimeVectorInput<U, TT> &input)
```

Sets this bounding box output up with the same parameters as the supplied vector input.

Parameters

input – A vector input to copy the information from

```
inline int sizeX () const
```

Returns

The width of the input region in pixels. Any event on this input will have a x-coordinate smaller than the return value of this function.

```
inline int sizeY () const
```

Returns

The height of the input region in pixels. Any event on this input will have a y-coordinate smaller than the return value of this function

```
inline const cv::Size size () const
```

Returns

the input region size in pixels as an OpenCV size object

```
template<>
```

```
class RuntimeVectorOutput<dv::EventPacket, dv::Event> : public
dv::RuntimeVectorOutputCommon<dv::EventPacket, dv::Event>
```

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/data/event.hpp> Specialization of the runtime output for event outputs. Provides convenience setup functions for setting up the event output

Public Functions

inline **RuntimeVectorOutput** (const std::string &name, *dvModuleData* moduleData)

inline *OutputVectorDataWrapper*<*dv*::EventPacket, *dv*::Event> **data** ()

Returns a writeable output wrapper for the given type of this output. Allocates new output memory if necessary. The output can be committed by calling commit on the returned object.

Returns

A wrapper to allocated output memory to write to

inline *OutputVectorDataWrapper*<*dv*::EventPacket, *dv*::Event> **events** ()

void **setup** (const std::string &originDescription) = delete

inline void **setup** (int sizeX, int sizeY, const std::string &originDescription)

Sets up this event output by setting the provided arguments to the output info node

Parameters

- **sizeX** – The width of this event output
- **sizeY** – The height of this event output
- **originDescription** – A description that describes the original generator of the data

template<typename *U*>

inline void **setup** (const *RuntimeInput*<*U*> &input)

Sets this event output up with the same parameters as the supplied input.

Parameters

input – An input to copy the information from

template<typename *U*, typename *TT*>

inline void **setup** (const *RuntimeVectorInput*<*U*, *TT*> &input)

Sets this event output up with the same parameters as the supplied vector input.

Parameters

input – A vector input to copy the information from

inline int **sizeX** () const

Returns

The width of the input region in pixels. Any event on this input will have a x-coordinate smaller than the return value of this function.

inline int **sizeY** () const

Returns

The height of the input region in pixels. Any event on this input will have a y-coordinate smaller than the return value of this function

```
inline const cv::Size size() const
```

Returns

the input region size in pixels as an OpenCV size object

```
template<typename K>
```

```
inline RuntimeVectorOutput<dv::EventPacket, dv::Event> &operator<<(const K &rhs)
```

Convenience shortcut to commit the data on this output directly This gets resolved to one of the various << functions of the data wrapper.

```
inline void operator<<(commitType)
```

Convenience shortcut to commit the data on this output directly

```
template<typename T>
```

class **Stats**

```
#include </builds/inivation/dv/dv-runtime/include/dv-sdk/stats.hpp> Class which provides the functionality to measure statistics for numeric data types. The following statistics are computed and published, along with the most recently added value itself:
```

- mean
- variance
- minimum
- maximum
- sample count

Public Functions

```
Stats() = delete
```

Deleted default constructor

```
inline Stats(const dv::Config::Node node, const std::string_view name)
```

Constructor which selects the default window size

Creates a node with the name name relative to node. The stats will be published to the attributes current, mean, var, min, max and count at this node.

See also:

DEFAULT_WINDOW_SIZE for the rolling *mean* and variance.

Parameters

- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

```
inline Stats(const uint32_t windowSize, const dv::Config::Node node, const std::string_view name)
```

Constructor which applies a custom window size for the rolling mean and variance.

Creates a node with the name name relative to node. The stats will be published to the attributes current, mean, var, min, max and count at this node.

Parameters

- **windowSize** – size of the accumulator window

- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

Stats (const *Stats* &other) = delete
 Copy - Disallow: since node and name are the same, you'd suddenly have two objects feeding data into the configuration backend and overwriting each other. This is not what you want.

Stats &**operator=** (const *Stats* &rhs) = delete

Stats (*Stats* &&other) = default

Move

Stats &**operator=** (*Stats* &&rhs) = default

virtual ~**Stats** () noexcept = default

Destructor

inline void **operator()** (const *T* value) noexcept

Adds a new value to the underlying accumulator

inline auto **currentSample** () const noexcept

Returns the most recently added sample

inline auto **mean** () const noexcept

Returns the rolling mean

inline auto **var** () const noexcept

Returns the rolling variance

inline auto **min** () const noexcept

Returns the minimum value

inline auto **max** () const noexcept

Returns the maximum value

inline auto **count** () const noexcept

Returns the number of added samples

Protected Types

```
template<typename ...ARGS>
using accumulator_set = boost::accumulators::accumulator_set<ARGS...>

template<typename ...ARGS>
using stats = boost::accumulators::stats<ARGS...>

using tag_lazy_rolling_mean = boost::accumulators::tag::lazy_rolling_mean

using tag_lazy_rolling_variance = boost::accumulators::tag::lazy_rolling_variance

using tag_min = boost::accumulators::tag::min
```

```
using tag_max = boost::accumulators::tag::max

using tag_count = boost::accumulators::tag::count

using accumulator = accumulator_set<T, stats<tag_lazy_rolling_mean, tag_lazy_rolling_variance, tag_min,
tag_max, tag_count>>
```

Protected Attributes

```
accumulator mAccumulator = {boost::accumulators::tag::rolling_window::window_size =
DEFAULT_WINDOW_SIZE}
```

```
T mCurrent = {}
```

```
uint32_t mWindowSize = {DEFAULT_WINDOW_SIZE}
```

```
dv::RateLimiter mRateLimiter = {1, PUBLISHING_RATE_MS}
```

```
std::string mName
```

```
dv::Config::Node mNode
```

Protected Static Attributes

```
static constexpr uint32_t DEFAULT_WINDOW_SIZE = {500}
```

```
static constexpr uint32_t PUBLISHING_RATE_MS = {300}
```

Private Functions

```
inline void init ()
```

Initializes the underlying accumulators to zero, and creates the node attributes to which data will be published.

```
inline void publish () noexcept
```

Publishes the statistical data to the node attributes

```
class TCPTLSSocket
```

Public Functions

```
inline TCPTLSSocket (asioTCP::socket s, bool tlsEnabled, asioSSL::context *tlsContext)
inline ~TCPTLSSocket ()

inline void close ()

template<typename StartupHandler>
inline void start (StartupHandler &&stHandler, asioSSL::stream_base::handshake_type type)
    Startup handler needs following signature: void (const boost::system::error_code &)

template<typename WriteHandler>
inline void write (const asio::const_buffer &buf, WriteHandler &&wrHandler)
    Write handler needs following signature: void (const boost::system::error_code &, size_t)

template<typename ReadHandler>
inline void read (const asio::mutable_buffer &buf, ReadHandler &&rdHandler)
    Read handler needs following signature: void (const boost::system::error_code &, size_t)

inline asioTCP::endpoint local_endpoint () const
inline asioIP::address local_address () const
inline uint16_t local_port () const
inline asioTCP::endpoint remote_endpoint () const
inline asioIP::address remote_address () const
inline uint16_t remote_port () const
```

Private Functions

```
inline asioTCP::socket &baseSocket ()
```

Private Members

```
asioTCP::endpoint localEndpoint
asioTCP::endpoint remoteEndpoint
asioSSL::stream<asioTCP::socket> socket
```

```
bool socketClosed
```

```
bool secureConnection
```

```
class Throughput : public dv::statistics::Stats<float>
```

#include </builds/inivation/dv/dv-runtime/include/dv-sdk/stats.hpp> Class which provides the functionality to measure statistics for throughput related data.

Public Functions

Throughput () = delete

Deleted default constructor

inline **Throughput** (const *dv::Config::Node* node, const std::string_view name)

Constructor which selects the default measurement interval

The data will be published to the node node/name/throughput/ if a name is specified, or `node/throughput/` if none is specified.

See also:

DEFAULT_MEASUREMENT_INTERVAL and window size for the underlying statistics.

See also:

Stats.

See also:

Stats

Parameters

- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

inline **Throughput** (const std::chrono::microseconds measurementInterval, const *dv::Config::Node* node, const std::string_view name)

Constructor which applies a custom measurement interval and the default window size for the underlying statistics.

The data will be published to the node node/name/throughput/ if a name is specified, or `node/throughput/` if none is specified.

See also:

Stats.

See also:

Stats

Parameters

- **measurementInterval** – The measurement interval with which the throughput shall be evaluated.
- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

inline **Throughput** (const uint32_t windowSize, const std::chrono::microseconds measurementInterval, const *dv::Config::Node* node, const std::string_view name)

Constructor which applies a custom measurement interval and a custom window size for the underlying statistics.

The data will be published to the node node/name/throughput/ if a name is specified, or `node/throughput/` if none is specified.

See also:

Stats.

See also:

Stats

Parameters

- **windowSize** – the window size for the statistical accumulators. @See *Stats*
- **measurementInterval** – The measurement interval with which the throughput shall be evaluated.
- **node** – Parent node relative to which the node for the measured stats should be published
- **name** – Name of the node

Throughput (const *Throughput* &other) = delete

Copy - Disallow: since node and name are the same, you'd suddenly have two objects feeding data into the configuration backend and overwriting each other. This is not what you want.

Throughput &**operator=** (const *Throughput* &rhs) = delete

Throughput (*Throughput* &&other) = default

Move

Throughput &**operator=** (*Throughput* &&rhs) = default

~Throughput () noexcept = default

Destructor

inline void **add** (const uint64_t elements) noexcept

Updates the statistics by adding elements to the number of elements already received within this interval.

If an interval has finished since we previously called this method, the throughput is computed and added to the underlying statistical accumulators.

See also:

Stats.

Parameters

elements – The number of elements to be added to the throughput computation

Private Members

```
std::chrono::time_point<std::chrono::steady_clock> mStartTime = {std::chrono::steady_clock::now()}
```

```
uint64_t mNumElements = {0}
```

```
std::chrono::microseconds mMeasurementInterval = {DEFAULT_MEASUREMENT_INTERVAL}
```

Private Static Attributes

```
static constexpr std::chrono::duration DEFAULT_MEASUREMENT_INTERVAL = {std::chrono::milliseconds(1)}
```

```
class Tree
```

Public Functions

```
inline Tree (dvConfigTree t)  
inline explicit operator dvConfigTree () const  
inline void deleteTree ()  
inline bool existsNode (const std::string &nodePath) const  
inline Node getRootNode () const  
inline Node getNode (const std::string &nodePath) const
```

This returns a reference to a node, and as such must be carefully mediated with any dvConfigNodeRemoveNode() calls.

Throws

std::out_of_range – Invalid absolute node path.

```
inline void attributeUpdaterRemoveAll ()
```

```
inline bool attributeUpdaterRun ()
```

```
inline void globalNodeListenerSet (dvConfigNodeChangeListener node_changed, void *userData)
```

Listener must be able to deal with userData being NULL at any moment. This can happen due to concurrent changes from this setter.

```
inline void globalAttributeListenerSet (dvConfigAttributeChangeListener attribute_changed, void *userData)
```

Listener must be able to deal with userData being NULL at any moment. This can happen due to concurrent changes from this setter.

Public Static Functions

```
static inline Tree globalTree ()  
static inline Tree newTree ()  
static inline void errorLogCallbackSet (dvConfigTreeErrorLogCallback error_log_cb)  
static inline dvConfigTreeErrorLogCallback errorLogCallbackGet ()
```

Private Members

dvConfigTree **tree**

```
template<class T>
class WriteOrderedSocket : public T
```

Public Functions

```
template<typename ...ARGS>
inline WriteOrderedSocket (ARGS&&... args)
```

```
template<typename WriteHandler>
inline void write (const asio::const_buffer &buf, WriteHandler &&wrHandler)
```

Write handler needs following signature: void (const boost::system::error_code &, size_t)

Private Members

```
std::deque<std::pair<asio::const_buffer, std::function<void(const boost::system::error_code&, size_t)>>>
writeQueue
```

namespace **dv**

Header file that includes the C++ wrapper for the DV logging facilities.

Enums

enum class **FileDialogMode**

Different opening modes for a File Dialog config option.

Values:

enumerator **OPEN**

enumerator **SAVE**

enumerator **DIRECTORY**

enum class **_StringAttributeType**

INTERNAL: select between different string types.

Values:

enumerator **NORMAL**

enumerator **LIST**

enumerator **FILE**

enum class **_BooleanAttributeType**

INTERNAL: select between different boolean types

Values:

enumerator **CHECKBOX**

enumerator **BUTTON**

enum class **EventColor** : int8_t

The EventColor enum contains the color of the Bayer color filter for a specific event address. WHITE means White/No Filter. Please take into account that there are usually twice as many green pixels as there are red or blue ones.

Values:

enumerator **WHITE**

enumerator **RED**

enumerator **GREEN**

enumerator **BLUE**

Functions

template<class **T**>

inline **T sgn (T x)**

Returns the sign of the given number as -1 or 1. Returns 1 for 0.

Template Parameters

T – The data type of the number and return value

Parameters

x – the data to be checked

Returns

-1 iff $x < 0$, 1 otherwise

Variables

```
static constexpr EventColor colorKeys[4][4] = {{EventColor::RED, EventColor::GREEN, EventColor::GREEN, EventColor::BLUE}, {EventColor::GREEN, EventColor::BLUE, EventColor::RED, EventColor::GREEN}, {EventColor::GREEN, EventColor::RED, EventColor::BLUE, EventColor::GREEN}, {EventColor::BLUE, EventColor::GREEN, EventColor::GREEN, EventColor::RED},}
```

Address to Color mapping for events based on Bayer filter.

```
constexpr commitType commit = {}
```

```
constexpr logEndType logEnd = {}
```

template<typename T>

```
constexpr bool has_initDescription = has_static_member_function_initDescription<T, const char*>::value
```

Trait for the existence of a static initDescription method with const char* return value

Template Parameters

T – The class to be tested

template<typename T>

```
constexpr bool has_initConfigOptions = has_static_member_function_initConfigOptions<T, void(RuntimeConfig&)>::value
```

Trait for the existence of a static initConfigOptions method with map argument

Template Parameters

T – The class to be tested

template<typename T>

```
constexpr bool has_advancedStaticInit = has_static_member_function_advancedStaticInit<T, void(dvModuleData)>::value
```

template<typename T>

```
constexpr bool has_initTypes = has_static_member_function_initTypes<T, void(std::vector<dv::Types::Type>&)>::value
```

template<typename T>

```
constexpr bool has_initInputs = has_static_member_function_initInputs<T, void(dv::InputDefinitionList&)>::value
```

template<typename T>

```
constexpr bool has_initOutputs = has_static_member_function_initOutputs<T, void(dv::OutputDefinitionList&)>::value
```

namespace **Config**

Enums

enum class **AttributeType**

Values:

enumerator **UNKNOWN**

enumerator **BOOL**

enumerator **INT**

enumerator **LONG**

enumerator **FLOAT**

enumerator **DOUBLE**

enumerator **STRING**

enum class **AttributeFlags** : uint32_t

Values:

enumerator **NORMAL**

enumerator **READ_ONLY**

enumerator **NO_EXPORT**

enumerator **IMPORTED**

Functions

inline *AttributeFlags* **operator|** (*AttributeFlags* lhs, *AttributeFlags* rhs)

inline *AttributeFlags* &**operator|=** (*AttributeFlags* &lhs, *AttributeFlags* rhs)

inline int **getCFlags** (*AttributeFlags* f)

Variables

```
static Tree GLOBAL = Tree::globalTree()

namespace runtime
```

Variables

```
static constexpr int VERSION_MAJOR = {1}

static constexpr int VERSION_MINOR = {6}

static constexpr int VERSION_PATCH = {2}

static constexpr int VERSION = {((1 * 10000) + (6 * 100) + 2)}

static constexpr std::string_view NAME_STRING = {"dv-runtime"}

static constexpr std::string_view VERSION_STRING = {"1.6.2"}
```

namespace **statistics**

file config.hpp

```
#include "cross/portable_io.h"#include "utils.h"#include <boost/algorithm/string/join.hpp>#include <chrono>#include <cmath>#include <string>#include <unordered_map>#include <vector>
```

Defines

DV_MODULE_MULTI_THREAD_SAFE

file dvConfig.h

```
#include <errno.h>#include <inttypes.h>#include <stdbool.h>#include <stdint.h>#include <stdlib.h>#include "dv-sdk/api_visibility.h"
```

Typedefs

```
typedef struct dv_config_node *dvConfigNode

typedef const struct dv_config_node *dvConfigNodeConst

typedef void (*dvConfigNodeChangeListener)(dvConfigNode node, void *userData, enum dvConfigNodeEvents event, const char *changeNode)
```

```
typedef void (*dvConfigAttributeChangeListener)(dvConfigNode node, void *userData, enum dvConfigAttributeEvents event, const char *changeKey, enum dvConfigAttributeType changeType, union dvConfigAttributeValue changeValue)

typedef struct dv_config_tree *dvConfigTree

typedef const struct dv_config_tree *dvConfigTreeConst

typedef void (*dvConfigTreeErrorLogCallback)(const char *msg, bool fatal)

typedef union dvConfigAttributeValue (*dvConfigAttributeUpdater)(void *userData, const char *key, enum dvConfigAttributeType type)
```

Enums

enum **dvConfigAttributeType**

Values:

enumerator **DVCFG_TYPE_UNKNOWN**

enumerator **DVCFG_TYPE_BOOL**

enumerator **DVCFG_TYPE_INT**

enumerator **DVCFG_TYPE_LONG**

enumerator **DVCFG_TYPE_FLOAT**

enumerator **DVCFG_TYPE_DOUBLE**

enumerator **DVCFG_TYPE_STRING**

enum **dvConfigAttributeFlags**

Values:

enumerator **DVCFG_FLAGS_NORMAL**

enumerator **DVCFG_FLAGS_READ_ONLY**

enumerator **DVCFG_FLAGS_NO_EXPORT**

enumerator **DVCFG_FLAGS_IMPORTED**

enum **dvConfigNodeEvents**

Values:

enumerator **DVCFG_NODE_CHILD_ADDED**

enumerator **DVCFG_NODE_CHILD_REMOVED**

enum **dvConfigAttributeEvents**

Values:

enumerator **DVCFG_ATTRIBUTE_ADDED**

enumerator **DVCFG_ATTRIBUTE_MODIFIED**

enumerator **DVCFG_ATTRIBUTE_REMOVED**

enumerator **DVCFG_ATTRIBUTE_MODIFIED_CREATE**

Functions

DVSDK_EXPORT const char * dvConfigNodeGetName (dvConfigNodeConst node)

DVSDK_EXPORT const char * dvConfigNodeGetPath (dvConfigNodeConst node)

DVSDK_EXPORT dvConfigNode dvConfigNodeGetParent (dvConfigNodeConst node)

This returns a reference to a node, and as such must be carefully mediated with any dvConfigNodeRemoveNode() calls.

DVSDK_EXPORT dvConfigNode * dvConfigNodeGetChildren (dvConfigNodeConst node, size_t *numChildren)

Remember to free the resulting array. This returns references to nodes, and as such must be carefully mediated with any dvConfigNodeRemoveNode() calls.

DVSDK_EXPORT void dvConfigNodeAddNodeListener (dvConfigNode node, void *userData, dvConfigNodeChangeListener node_changed)

DVSDK_EXPORT void dvConfigNodeRemoveNodeListener (dvConfigNode node, void *userData, dvConfigNodeChangeListener node_changed)

DVSDK_EXPORT void dvConfigNodeRemoveAllNodeListeners (dvConfigNode node)

DVSDK_EXPORT void dvConfigNodeAddAttributeListener (dvConfigNode node, void *userData, dvConfigAttributeChangeListener attribute_changed)

```
DVSDK_EXPORT void dvConfigNodeRemoveAttributeListener (dvConfigNode node,  
void *userData, dvConfigAttributeChangeListener attribute_changed)
```

```
DVSDK_EXPORT void dvConfigNodeRemoveAllAttributeListeners (dvConfigN-  
ode node)
```

```
DVSDK_EXPORT void dvConfigNodeRemoveNode (dvConfigNode node)
```

Careful, only use if no references exist to this node and all its children. References are created by dvConfigTreeGetNode(), dvConfigNodeGetRelativeNode(), dvConfigNodeGetParent() and dvConfigNodeGetChildren().

```
DVSDK_EXPORT void dvConfigNodeRemoveSubTree (dvConfigNode node)
```

Careful, only use if no references exist to this node's children. References are created by dvConfigTreeGetN-
ode(), dvConfigNodeGetRelativeNode(), dvConfigNodeGetParent() and dvConfigNodeGetChildren().

```
DVSDK_EXPORT void dvConfigNodeClearSubTree (dvConfigNode startNode,  
bool clearStartNode)
```

```
DVSDK_EXPORT void dvConfigNodeCopy (dvConfigNodeConst source,  
dvConfigNode destination)
```

```
DVSDK_EXPORT void dvConfigNodeCreateAttribute (dvConfigNode node,  
const char *key, enum dvConfigAttributeType type,  
union dvConfigAttributeValue defaultValue,  
const struct dvConfigAttributeRanges ranges, int flags,  
const char *description)
```

```
DVSDK_EXPORT void dvConfigNodeRemoveAttribute (dvConfigNode node,  
const char *key, enum dvConfigAttributeType type)
```

```
DVSDK_EXPORT void dvConfigNodeRemoveAllAttributes (dvConfigNode node)
```

```
DVSDK_EXPORT bool dvConfigNodeExistsAttribute (dvConfigNodeConst node,  
const char *key, enum dvConfigAttributeType type)
```

```
DVSDK_EXPORT bool dvConfigNodePutAttribute (dvConfigNode node,  
const char *key, enum dvConfigAttributeType type,  
union dvConfigAttributeValue value)
```

```
DVSDK_EXPORT union dvConfigAttributeValue dvConfigNodeGetAttribute (dvCon-  
figNodeConst node, const char *key, enum dvConfigAttributeType type)
```

```
DVSDK_EXPORT bool dvConfigNodeUpdateReadOnlyAttribute (dvConfigNode node,  
const char *key, enum dvConfigAttributeType type,  
union dvConfigAttributeValue value)
```

```
DVSDK_EXPORT void dvConfigNodeCreateBool (dvConfigNode node,  
const char *key, bool defaultValue, int flags, const char *description)
```

```
DVSDK_EXPORT bool dvConfigNodePutBool (dvConfigNode node, const char *key,
bool value)

DVSDK_EXPORT bool dvConfigNodeGetBool (dvConfigNodeConst node,
const char *key)

DVSDK_EXPORT void dvConfigNodeCreateInt (dvConfigNode node,
const char *key, int32_t defaultValue, int32_t minValue, int32_t maxValue,
int flags, const char *description)

DVSDK_EXPORT bool dvConfigNodePutInt (dvConfigNode node, const char *key,
int32_t value)

DVSDK_EXPORT int32_t dvConfigNodeGetInt (dvConfigNodeConst node,
const char *key)

DVSDK_EXPORT void dvConfigNodeCreateLong (dvConfigNode node,
const char *key, int64_t defaultValue, int64_t minValue, int64_t maxValue,
int flags, const char *description)

DVSDK_EXPORT bool dvConfigNodePutLong (dvConfigNode node, const char *key,
int64_t value)

DVSDK_EXPORT int64_t dvConfigNodeGetLong (dvConfigNodeConst node,
const char *key)

DVSDK_EXPORT void dvConfigNodeCreateFloat (dvConfigNode node,
const char *key, float defaultValue, float minValue, float maxValue,
int flags, const char *description)

DVSDK_EXPORT bool dvConfigNodePutFloat (dvConfigNode node,
const char *key, float value)

DVSDK_EXPORT float dvConfigNodeGetFloat (dvConfigNodeConst node,
const char *key)

DVSDK_EXPORT void dvConfigNodeCreateDouble (dvConfigNode node,
const char *key, double defaultValue, double minValue, double maxValue,
int flags, const char *description)

DVSDK_EXPORT bool dvConfigNodePutDouble (dvConfigNode node,
const char *key, double value)

DVSDK_EXPORT double dvConfigNodeGetDouble (dvConfigNodeConst node,
const char *key)

DVSDK_EXPORT void dvConfigNodeCreateString (dvConfigNode node,
const char *key, const char *defaultValue, int32_t minLength,
int32_t maxLength, int flags, const char *description)
```

```
DVSDK_EXPORT bool dvConfigNodePutString (dvConfigNode node,
const char *key, const char *value)

DVSDK_EXPORT char * dvConfigNodeGetString (dvConfigNodeConst node,
const char *key)

DVSDK_EXPORT bool dvConfigNodeExportNodeToXML (dvConfigNodeConst node,
const char *filePath, bool exportAll)

DVSDK_EXPORT bool dvConfigNodeExportSubTreeToXML (dvConfigNodeConst node,
const char *filePath, bool exportAll)

DVSDK_EXPORT bool dvConfigNodeImportNodeFromXML (dvConfigNode node,
const char *filePath, bool strict)

DVSDK_EXPORT bool dvConfigNodeImportSubTreeFromXML (dvConfigNode node,
const char *filePath, bool strict)

DVSDK_EXPORT char * dvConfigNodeExportNodeToXMLString (dvConfigNode-
Const node, bool exportAll)

DVSDK_EXPORT char * dvConfigNodeExportSubTreeToXMLString (dvConfigNode-
Const node, bool exportAll)

DVSDK_EXPORT bool dvConfigNodeImportNodeFromXMLString (dvConfigNode node,
const char *xmlStr, bool strict)

DVSDK_EXPORT bool dvConfigNodeImportSubTreeFromXMLString (dvConfigN-
ode node, const char *xmlStr, bool strict)

DVSDK_EXPORT bool dvConfigNodeStringToAttributeConverter (dvConfigN-
ode node, const char *key, const char *type, const char *value, bool over-
rideReadOnly)

DVSDK_EXPORT const char ** dvConfigNodeGetChildNames (dvConfigNode-
Const node, size_t *numNames)

DVSDK_EXPORT const char ** dvConfigNodeGetAttributeKeys (dvConfigNode-
Const node, size_t *numKeys)

DVSDK_EXPORT enum dvConfigAttributeType dvConfigNodeGetAttributeType (dv-
ConfigNodeConst node, const char *key)

DVSDK_EXPORT struct dvConfigAttributeRanges dvConfigNodeGetAt-
tributeRanges (dvConfigNodeConst node, const char *key, enum dvConfigAt-
tributeType type)
```

```

DVSDK_EXPORT int dvConfigNodeGetAttributeFlags (dvConfigNodeConst node,
const char *key, enum dvConfigAttributeType type)

DVSDK_EXPORT char * dvConfigNodeGetAttributeDescription (dvConfigNode-
Const node, const char *key, enum dvConfigAttributeType type)

DVSDK_EXPORT void dvConfigNodeAttributeModifierButton (dvConfigNode node,
const char *key, const char *buttonLabel)

DVSDK_EXPORT void dvConfigNodeAttributeModifierListOptions (dvConfigN-
ode node, const char *key, const char *listOptions, bool allowMultipleSe-
lections)

DVSDK_EXPORT void dvConfigNodeAttributeModifierFileChooser (dvConfigN-
ode node, const char *key, const char *typeAndExtensions)

DVSDK_EXPORT void dvConfigNodeAttributeModifierUnit (dvConfigNode node,
const char *key, const char *unitInformation)

DVSDK_EXPORT void dvConfigNodeAttributeModifierPriorityAttributes (dvCon-
figNode node, const char *priorityAttributes)

DVSDK_EXPORT void dvConfigNodeAttributeModifierGUISupport (dvConfigN-
ode node)

DVSDK_EXPORT void dvConfigNodeAttributeBooleanReset (dvConfigNode node,
const char *key)

DVSDK_EXPORT bool dvConfigNodeExistsRelativeNode (dvConfigNodeConst node,
const char *nodePath)

DVSDK_EXPORT dvConfigNode dvConfigNodeGetRelativeNode (dvConfigNode node,
const char *nodePath)

This returns a reference to a node, and as such must be carefully mediated with any dvConfigNodeRemoveN-
ode() calls.

DVSDK_EXPORT const char * dvConfigHelperTypeToStringConverter (enum dvCon-
figAttributeType type)

DVSDK_EXPORT enum dvConfigAttributeType dvConfigHelperStringToTypeCon-
verter (const char *typeString)

DVSDK_EXPORT char * dvConfigHelperValueToStringConverter (enum dvConfigAt-
tributeType type, union dvConfigAttributeValue value)

DVSDK_EXPORT union dvConfigAttributeValue dvConfigHelperStringToValueCon-
verter (enum dvConfigAttributeType type, const char *valueString)

```

```
DVSDK_EXPORT char * dvConfigHelperFlagsToStringConverter (int flags)

DVSDK_EXPORT int dvConfigHelperStringToFlagsCon-
verter (const char *flagsString)

DVSDK_EXPORT char * dvConfigHelperRangesToStringConverter (enum dvConfig-
gAttributeType type, struct dvConfigAttributeRanges ranges)

DVSDK_EXPORT struct dvConfigAttributeRanges dvConfigHelperStringToR-
angesConverter (enum dvConfigAttributeType type, const char *rangesString)

DVSDK_EXPORT dvConfigTree dvConfigTreeGlobal (void)

DVSDK_EXPORT dvConfigTree dvConfigTreeNew (void)

DVSDK_EXPORT void dvConfigTreeDelete (dvConfigTree tree)

DVSDK_EXPORT void dvConfigTreeErrorLogCallbackSet (dvConfigTreeErrorLog-
Callback error_log_cb)

DVSDK_EXPORT dvConfigTreeErrorLogCallback dvConfigTreeErrorLogCallback-
Get (void)

DVSDK_EXPORT bool dvConfigTreeExistsNode (dvConfigTreeConst st,
const char *nodePath)

DVSDK_EXPORT dvConfigNode dvConfigTreeGetNode (dvConfigTree st,
const char *nodePath)

This returns a reference to a node, and as such must be carefully mediated with any dvConfigNodeRemoveN-
ode() calls.

DVSDK_EXPORT void dvConfigNodeAttributeUpdaterAdd (dvConfigNode node,
const char *key, enum dvConfigAttributeType type,
dvConfigAttributeUpdater updater, void *updaterUserData, bool runOnce)

DVSDK_EXPORT void dvConfigNodeAttributeUpdaterRemove (dvConfigNode node,
const char *key, enum dvConfigAttributeType type,
dvConfigAttributeUpdater updater, void *updaterUserData)

DVSDK_EXPORT void dvConfigNodeAttributeUpdaterRemoveAll (dvConfigNode node)

DVSDK_EXPORT void dvConfigTreeAttributeUpdaterRemoveAll (dvConfigTree tree)

DVSDK_EXPORT bool dvConfigTreeAttributeUpdaterRun (dvConfigTree tree)
```

```
DVSDK_EXPORT void dvConfigTreeGlobalNodeListenerSet (dvConfigTree tree,
dvConfigNodeChangeListener node_changed, void *userData)
```

Listener must be able to deal with userData being NULL at any moment. This can happen due to concurrent changes from this setter.

```
DVSDK_EXPORT void dvConfigTreeGlobalAttributeListenerSet (dvConfigTree tree,
dvConfigAttributeChangeListener attribute_changed,
void *userData)
```

Listener must be able to deal with userData being NULL at any moment. This can happen due to concurrent changes from this setter.

file dvConfig.hpp

```
#include "dvConfig.h">#include <stdexcept>#include <string>#include <string_view>#include <vector>
```

file asio_tcptlssocket.hpp

```
#include <utility>#include <boost/asio.hpp>#include <boost/asio/ssl.hpp>#include <boost/version.hpp>#include <deque>
```

Defines

```
BOOST_ASIO_NET_NEW_INTERFACE
```

Typedefs

using **asioTCP** = asioIP::tcp

file portable_endian.h

```
#include <stdint.h>#include <string.h> Endianness conversion functions for a wide variety of systems, including Linux, FreeBSD, MacOS X and Windows.
```

Functions

```
static inline float htobeflt (float val)
static inline float htolefltl (float val)
static inline float beflttob (float val)
static inline float leflttob (float val)
```

file portable_io.h

```
#include <stdlib.h>#include "dv-sdk/api_visibility.h"#include <limits.h>
```

Functions

DVSDK_EXPORT char * portable_get_user_home_directory (void)

Get the user's home directory path as a string. Returned string is a dynamically allocated copy, always remember to free() it to avoid a memory leak.

Returns

string containing user home directory path. Always remember to free() this!

DVSDK_EXPORT char * portable_get_executable_location (void)

Get the current executable's location as a string. Returned string is a dynamically allocated copy, always remember to free() it to avoid a memory leak.

Returns

string containing current executable path. Always remember to free() this!

DVSDK_EXPORT char * portable_get_user_name (void)

Get the user name of the user that's currently executing the program.

Returns

string containing user name. Always remember to free() this!

file portable_threads.h

```
#include <stdbool.h>#include <stdlib.h>#include "dv-sdk/api_visibility.h"
```

Functions

DVSDK_EXPORT bool portable_thread_set_name (const char *name)

DVSDK_EXPORT bool portable_thread_set_priority_highest (void)

file portable_time.h

```
#include <stdbool.h>#include <stdlib.h>#include <time.h>#include "dv-sdk/api_visibility.h"
```

Functions

DVSDK_EXPORT bool portable_clock_gettime_monotonic (struct timespec *monoTime)

DVSDK_EXPORT bool portable_clock_gettime_realtime (struct timespec *realTime)

file bounding_box.hpp

```
#include "wrappers.hpp"#include <dv-processing/data/bounding_box_base.hpp>#include <opencv2/core.hpp>#include <opencv2/core/utility.hpp>
```

```

file cstring.hpp
#include <dv-processing/data/cstring.hpp>

file cvector.hpp
#include <dv-processing/data/cvector.hpp>

file cvector_proxy.hpp
#include <dv-processing/data/cvector.hpp>

file imu.hpp
#include "wrappers.hpp" #include <dv-processing/data imu_base.hpp>

file trigger.hpp
#include "wrappers.hpp" #include <dv-processing/data trigger_base.hpp>

file types.hpp
#include "./utils.h" #include <cassert>

```

Typedefs

```

typedef uint32_t (*dvTypePackFuncPtr)(void *toFlatBufferBuilder, const void *fromObject)

typedef void (*dvTypeUnpackFuncPtr)(void *toObject, const void *fromFlatBuffer)

typedef void *(*dvTypeConstructPtr)(size_t sizeOfObject)

typedef void (*dvTypeDestructPtr)(void *object)

typedef struct dvTypeTimeElementExtractor (*dvTypeTimeElementExtractorPtr)(const void *object)

typedef bool (*dvTypeUnpackTimeElementRangeFuncPtr)(void *toObject, const void *fromFlatBuffer, struct dvTypeTimeElementExtractor range)

```

Functions

```

DVSDK_EXPORT struct dvType dvTypeSystemGetInfoByIdenti-
fier (const char *tIdentifier)

DVSDK_EXPORT struct dvType dvTypeSystemGetInfoByID (uint32_t tId)

```

```

file wrappers.hpp
#include "./module.h" #include "./utils.h" #include "cvector_proxy.hpp"

```

file **log.hpp**
 #include "utils.h"#include <iostream>#include <sstream>

file **module.h**
 #include "data/types.hpp"#include "utils.h"

Typedefs

```
typedef struct dvModuleDataS *dvModuleData  
  
typedef struct dvModuleFunctionsS const *dvModuleFunctions  
  
typedef struct dvModuleInfoS const *dvModuleInfo
```

Enums

enum **dvModuleHooks**

Values:

enumerator **DV_HOOK_DEVICE_DISCOVERY**

Functions

DVSDK_EXPORT dvModuleInfo dvModuleGetInfo150 (void)

Function to be implemented by modules. Must return a *dvModuleInfoS* structure pointer, with all the information from your module.

DVSDK_EXPORT void * dvModuleGetHooks (enum dvModuleHooks hook)

Optional function to be implemented by modules. Must return a pointer to the right structure based on given enum value, or NULL if not supported.

**DVSDK_EXPORT void dvModuleRegisterType (dvModuleData moduleData,
const struct dvType type)**

**DVSDK_EXPORT void dvModuleRegisterOutput (dvModuleData moduleData,
const char *name, const char *typeName)**

**DVSDK_EXPORT void dvModuleRegisterInput (dvModuleData moduleData,
const char *name, const char *typeName, bool optional)**

**DVSDK_EXPORT struct dvTypedObject * dvModuleOutputAllocate (dvModule-
Data moduleData, const char *name)**

```
DVSDK_EXPORT void dvModuleOutputCommit (dvModuleData moduleData,
const char *name)

DVSDK_EXPORT const struct dvTypedObject * dvModuleInputGet (dvModule-
Data moduleData, const char *name)

DVSDK_EXPORT void dvModuleInputAdvance (dvModuleData moduleData,
const char *name)

DVSDK_EXPORT void dvModuleInputDismiss (dvModuleData moduleData,
const char *name, const struct dvTypedObject *data)

DVSDK_EXPORT dvConfigNode dvModuleOutputGetInfoNode (dvModule-
Data moduleData, const char *name)

DVSDK_EXPORT dvConfigNodeConst dvModuleInputGetInfoNode (dvModule-
Data moduleData, const char *name)

DVSDK_EXPORT bool dvModuleInputIsConnected (dvModuleData moduleData,
const char *name)
```

file module.hpp

```
#include "module_base.hpp"#include <boost/core/demangle.hpp>#include <boost/tti/has_static_member_func-
tion.hpp>#include <typeinfo>
```

Defines

registerModuleClass (MODULE)

Macro that expands into the global dvModuleGetInfo150 function, exposed to the API for DV. The function instantiates the ModuleStaticDefinition class with the given Module (A subclass) of *dv::ModuleBase* and returns the static info section.

Parameters

- MODULE –

file module_base.hpp

```
#include "config.hpp"#include "log.hpp"#include "module.h"#include "module_io.hpp"#include "utils.h"#include
<utility>
```

file module_io.hpp

```
#include "data/bounding_box.hpp"#include "data/event.hpp"#include "data/frame.hpp"#include
"data imu.hpp"#include "data/trigger.hpp"#include "data/wrappers.hpp"#include "module.h"#include
"utils.h"#include <opencv2/core.hpp>
```

file processing.hpp

```
#include "processing/core.hpp"#include "processing/event.hpp"#include "processing/frame.hpp"
```

```
file core.hpp
#include “./utils.h”#include <dv-processing/core/core.hpp>

file event.hpp
#include “wrappers.hpp”#include <dv-processing/core/core.hpp>#include <dv-processing/data/event_base.hpp>#include
<opencv2/core.hpp>#include <opencv2/core/utility.hpp>

file event.hpp
#include “./utils.h”#include <dv-processing/core/event.hpp>

file frame.hpp
#include “wrappers.hpp”#include <dv-processing/data/frame_base.hpp>#include <opencv2/core.hpp>#include
<opencv2/core/utility.hpp>#include <opencv2/imgproc.hpp>

file frame.hpp
#include “./utils.h”#include <dv-processing/core/frame.hpp>

file stats.hpp
#include “config.hpp”#include <boost/accumulators/accumulators.hpp>#include <boost/accumulators/statistics/max.hpp>#include
<boost/accumulators/statistics/min.hpp>#include <boost/accumulators/statistics/rolling_mean.hpp>#include
<boost/accumulators/statistics/rolling_variance.hpp>#include <boost/algorithm/string/predicate.hpp>#include <chrono>#include <type_traits>

file utils.h
#include <errno.h>#include <inttypes.h>#include <stdbool.h>#include <stddef.h>#include <stdint.h>#include
<stdlib.h>#include “config/dvConfig.h”
```

Defines

UNUSED_ARGUMENT (arg)

Enums

enum **dvLogLevel**

Values:

enumerator **DVLOG_ERROR**

enumerator **DVLOG_WARNING**

enumerator **DVLOG_INFO**

enumerator **DVLOG_DEBUG**

Functions

```
DVSDK_EXPORT void dvLog (enum dvLogLevel level, const char *message)
```

file **version.hpp**

```
#include <string_view>
```

Defines

DV_RUNTIME_VERSION_MAJOR

dv-runtime version (MAJOR * 10000 + MINOR * 100 + PATCH).

DV_RUNTIME_VERSION_MINOR

DV_RUNTIME_VERSION_PATCH

DV_RUNTIME_VERSION

DV_RUNTIME_NAME_STRING

dv-runtime name string.

DV_RUNTIME_VERSION_STRING

dv-runtime version string.

dir /builds/inivation/dv/dv-runtime/include/dv-sdk/config

dir /builds/inivation/dv/dv-runtime/include/dv-sdk/cross

dir /builds/inivation/dv/dv-runtime/include/dv-sdk/data

dir /builds/inivation/dv/dv-runtime/include/dv-sdk

dir /builds/inivation/dv/dv-runtime/include

dir /builds/inivation/dv/dv-runtime/include/dv-sdk/processing

INDEX

A

asioTCP (*C++ type*), 127

B

beflttob (*C++ function*), 127

BOOST_ASIO_NET_NEW_INTERFACE (*C macro*), 127

D

dv (*C++ type*), 115

dv:::_BooleanAttributeType (*C++ enum*), 116
dv:::_BooleanAttributeType::BUTTON (*C++ enumerator*), 116

dv:::_BooleanAttributeType::CHECKBOX
(*C++ enumerator*), 116

dv:::_ConfigAttributes (*C++ struct*), 40

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::BOOL> (*C++ struct*),
40

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::BOOL>:::_ConfigAt-
tributes (*C++ function*), 40

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::BOOL>::attribute-
Type (*C++ member*), 40

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::BOOL>::buttonLabel
(*C++ member*), 40

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::DOUBLE> (*C++ struct*),
40

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::DOUBLE>:::_Config-
gAttributes (*C++ function*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::DOUBLE>::range (*C++
member*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::DOUBLE>::unit
(*C++ member*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::FLOAT> (*C++ struct*),
41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::FLOAT>:::_ConfigAt-
tributes (*C++ function*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::FLOAT>::range
(*C++ member*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::FLOAT>::unit
(*C++ member*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::INT> (*C++ struct*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::INT>:::_ConfigAt-
tributes (*C++ function*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::INT>::range
(*C++ member*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::INT>::unit
(*C++ member*), 41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::LONG> (*C++ struct*),
41

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::LONG>:::_ConfigAt-
tributes (*C++ function*), 42

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::LONG>::range
(*C++ member*), 42

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::LONG>::unit
(*C++ member*), 42

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::STRING> (*C++ struct*),
42

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::STRING>:::_Config-
gAttributes (*C++ function*), 42

dv:::_ConfigAttributes<dv:::Config:::At-
tributeType::STRING>::fileAl-
lowedExtensions
(*C++ member*), 42

dv:::_ConfigAttributes<dv:::Config:::At-

tributeType::STRING>::fileMode
(*C++ member*), 42
dv::_ConfigAttributes<dv::Config::AttributeType::STRING>::length
(*C++ member*), 42
dv::_ConfigAttributes<dv::Config::AttributeType::STRING>::listAllLowMultipleSelections (*C++ member*), 42
dv::_ConfigAttributes<dv::Config::AttributeType::STRING>::listOptions (*C++ member*), 42
dv::_ConfigAttributes<dv::Config::AttributeType::STRING>::type (*C++ member*), 42
dv::_ConfigOption (*C++ class*), 42
dv::_ConfigOption::AttrType (*C++ type*), 43
dv::_ConfigOption::ConfigOption (*C++ function*), 43
dv::_ConfigOption::attributes (*C++ member*), 43
dv::_ConfigOption::currentValue (*C++ member*), 43
dv::_ConfigOption::description (*C++ member*), 43
dv::_ConfigOption::flags (*C++ member*), 43
dv::_ConfigOption::initValue (*C++ member*), 43
dv::_ConfigOption::updateReadOnly (*C++ member*), 43
dv::_InputDataWrapperCommon (*C++ class*), 43
dv::_InputDataWrapperCommon::InputDataWrapperCommon (*C++ function*), 44
dv::_InputDataWrapperCommon::getBasePointer (*C++ function*), 43
dv::_InputDataWrapperCommon::operator bool (*C++ function*), 43
dv::_InputDataWrapperCommon::operator std::shared_ptr<const T> (*C++ function*), 43
dv::_InputDataWrapperCommon::ptr (*C++ member*), 44
dv::_InputVectorDataWrapperCommon (*C++ class*), 44
dv::_InputVectorDataWrapperCommon::InputVectorDataWrapperCommon (*C++ function*), 44
dv::_OutputDataWrapperCommon (*C++ class*), 44
dv::_OutputDataWrapperCommon::OutputDataWrapperCommon (*C++ function*), 45
dv::_OutputDataWrapperCommon::commit
(*C++ function*), 44
dv::_OutputDataWrapperCommon::getBasePointer (*C++ function*), 44
dv::_OutputDataWrapperCommon::moduleData (*C++ member*), 45
dv::_OutputDataWrapperCommon::name (*C++ member*), 45
dv::_OutputDataWrapperCommon::operator bool (*C++ function*), 44
dv::_OutputDataWrapperCommon::operator << (*C++ function*), 44
dv::_OutputDataWrapperCommon::operator= (*C++ function*), 44
dv::_OutputDataWrapperCommon::ptr (*C++ member*), 45
dv::_OutputVectorDataWrapperCommon (*C++ class*), 45
dv::_OutputVectorDataWrapperCommon::OutputVectorDataWrapperCommon (*C++ function*), 45
dv::_OutputVectorDataWrapperCommon::commit (*C++ function*), 45
dv::_OutputVectorDataWrapperCommon::operator << (*C++ function*), 45
dv::_RateLimiter (*C++ class*), 45
dv::_RateLimiter::RateLimiter (*C++ function*), 46
dv::_RateLimiter::allowance (*C++ member*), 46
dv::_RateLimiter::allowanceLimit (*C++ member*), 46
dv::_RateLimiter::last_check (*C++ member*), 46
dv::_RateLimiter::pass (*C++ function*), 46
dv::_RateLimiter::rate (*C++ member*), 46
dv::_RuntimeInputCommon (*C++ class*), 46
dv::_RuntimeInputCommon::RuntimeInputCommon (*C++ function*), 47
dv::_RuntimeInputCommon::data (*C++ function*), 46
dv::_RuntimeInputCommon::getOriginDescription (*C++ function*), 46
dv::_RuntimeInputCommon::getUnwrapped (*C++ function*), 47
dv::_RuntimeInputCommon::infoNode (*C++ function*), 46
dv::_RuntimeInputCommon::isConnected
(*C++ function*), 46
dv::_RuntimeInputCommon::moduleData_ (*C++ member*), 47
dv::_RuntimeInputCommon::name_ (*C++ member*), 47
dv::_RuntimeOutputCommon (*C++ class*), 47
dv::_RuntimeOutputCommon::RuntimeOutputCommon

putCommon (*C++ function*), 49
 dv::_RuntimeOutputCommon::allocateUn-
 wrapped (*C++ function*), 48
 dv::_RuntimeOutputCommon::create-
 SizeAttributes (*C++ function*), 48
 dv::_RuntimeOutputCommon::create-
 SourceAttribute (*C++ function*), 48
 dv::_RuntimeOutputCommon::data (*C++ func-
 tion*), 48
 dv::_RuntimeOutputCommon::getOriginDe-
 scription (*C++ function*), 48
 dv::_RuntimeOutputCommon::infoNode (*C++
 function*), 48
 dv::_RuntimeOutputCommon::moduleData_
 (*C++ member*), 49
 dv::_RuntimeOutputCommon::name_ (*C++
 member*), 49
 dv::_RuntimeOutputCommon::operator<<
 (*C++ function*), 48
 dv::_RuntimeOutputCommon::setup (*C++
 function*), 47
 dv::_RuntimeVectorInputCommon (*C++ class*),
 49
 dv::_RuntimeVectorInputCommon::_Run-
 timeVectorInputCommon (*C++ func-
 tion*), 49
 dv::_RuntimeVectorInputCommon::data
 (*C++ function*), 49
 dv::_RuntimeVectorOutputCommon (*C++
 class*), 49
 dv::_RuntimeVectorOutputCommon::_Run-
 timeVectorOutputCommon (*C++ func-
 tion*), 50
 dv::_RuntimeVectorOutputCommon::data
 (*C++ function*), 49
 dv::_RuntimeVectorOutputCommon::opera-
 tor<< (*C++ function*), 49
 dv::_StringAttributeType (*C++ enum*), 115
 dv::_StringAttributeType::FILE (*C++ enu-
 merator*), 115
 dv::_StringAttributeType::LIST (*C++ enu-
 merator*), 115
 dv::_StringAttributeType::NORMAL (*C++
 member*), 115
 dv::colorKeys (*C++ member*), 117
 dv::commit (*C++ member*), 117
 dv::commitType (*C++ struct*), 55
 dv::Config (*C++ type*), 117
 dv::Config::AttributeFlags (*C++ enum*), 118
 dv::Config::AttributeFlags::IMPORTED
 (*C++ enumerator*), 118
 dv::Config::AttributeFlags::NO_EXPORT
 (*C++ enumerator*), 118
 dv::Config::AttributeFlags::NORMAL (*C++
 member*), 118
 dv::Config::AttributeFlags::READ_ONLY
 (*C++ enumerator*), 118
 dv::Config::AttributeRangeGenerator
 (*C++ struct*), 50
 dv::Config::AttributeRangeGenera-
 tor::rangeType (*C++ type*), 50
 dv::Config::AttributeRangeGenera-
 tor<AttributeType::BOOL> (*C++
 struct*), 50
 dv::Config::AttributeRange-
 Generator<Attribute-
 Type::BOOL>::rangeType (*C++ type*),
 50
 dv::Config::AttributeRangeGenera-
 tor<AttributeType::STRING> (*C++
 struct*), 50
 dv::Config::AttributeRange-
 Generator<Attribute-
 Type::STRING>::rangeType (*C++
 type*), 50
 dv::Config::AttributeRanges (*C++ struct*), 50
 dv::Config::AttributeRanges::At-
 tributeRanges (*C++ function*), 50
 dv::Config::AttributeRanges::getC-
 Struct (*C++ function*), 50
 dv::Config::AttributeRanges::max
 (*C++ member*), 51
 dv::Config::AttributeRanges::min
 (*C++ member*), 51
 dv::Config::AttributeRanges::rangeType
 (*C++ type*), 50
 dv::Config::AttributeRanges<Attribute-
 Type::BOOL> (*C++ struct*), 51
 dv::Config::AttributeRanges<Attribute-
 Type::BOOL>::AttributeRanges
 (*C++ function*), 51
 dv::Config::AttributeRanges<Attribute-
 Type::BOOL>::getCStruct (*C++
 function*), 51
 dv::Config::AttributeRanges<Attribute-
 Type::BOOL>::max (*C++ member*), 51
 dv::Config::AttributeRanges<Attribute-
 Type::BOOL>::min (*C++ member*), 51
 dv::Config::AttributeRanges<Attribute-
 Type::BOOL>::rangeType (*C++ type*),
 51
 dv::Config::AttributeType (*C++ enum*), 118
 dv::Config::AttributeType::BOOL (*C++ enu-
 merator*), 118
 dv::Config::AttributeType::DOUBLE (*C++
 member*), 118
 dv::Config::AttributeType::FLOAT (*C++
 member*), 118

dv::Config::AttributeType::INT (*C++ enumerator*), 118
dv::Config::AttributeType::LONG (*C++ enumerator*), 118
dv::Config::AttributeType::STRING (*C++ enumerator*), 118
dv::Config::AttributeType::UNKNOWN (*C++ enumerator*), 118
dv::Config::AttributeTypeConverter (*C++ struct*), 51
dv::Config::AttributeTypeConverter<bool> (*C++ struct*), 51
dv::Config::AttributeTypeConverter<bool>::type (*C++ member*), 51
dv::Config::AttributeTypeConverter<double> (*C++ struct*), 51
dv::Config::AttributeTypeConverter<double>::type (*C++ member*), 52
dv::Config::AttributeTypeConverter<float> (*C++ struct*), 52
dv::Config::AttributeTypeConverter<float>::type (*C++ member*), 52
dv::Config::AttributeTypeConverter<int32_t> (*C++ struct*), 52
dv::Config::AttributeTypeConverter<int32_t>::type (*C++ member*), 52
dv::Config::AttributeTypeConverter<int64_t> (*C++ struct*), 52
dv::Config::AttributeTypeConverter<int64_t>::type (*C++ member*), 52
dv::Config::AttributeTypeConverter<std::string> (*C++ struct*), 52
dv::Config::AttributeTypeConverter<std::string>::type (*C++ member*), 52
dv::Config::AttributeTypeGenerator (*C++ struct*), 52
dv::Config::AttributeTypeGenerator<AttributeType::BOOL> (*C++ struct*), 52
dv::Config::AttributeTypeGenerator<AttributeType::BOOL>::type (*C++ type*), 53
dv::Config::AttributeTypeGenerator<AttributeType::BOOL>::underlyingType (*C++ member*), 53
dv::Config::AttributeTypeGenerator<AttributeType::DOUBLE> (*C++ struct*), 53
dv::Config::AttributeTypeGenerator<AttributeType::DOUBLE>::type (*C++ type*), 53
dv::Config::AttributeTypeGenerator<AttributeType::DOUBLE>::underlyingType (*C++ member*), 53
dv::Config::AttributeTypeGenerator<AttributeType::FLOAT> (*C++ struct*), 53
dv::Config::AttributeTypeGenerator<AttributeType::FLOAT>::type (*C++ type*), 53
dv::Config::AttributeTypeGenerator<AttributeType::FLOAT>::underlyingType (*C++ member*), 53
dv::Config::AttributeTypeGenerator<AttributeType::INT> (*C++ struct*), 53
dv::Config::AttributeTypeGenerator<AttributeType::INT>::type (*C++ type*), 54
dv::Config::AttributeTypeGenerator<AttributeType::INT>::underlyingType (*C++ member*), 54
dv::Config::AttributeTypeGenerator<AttributeType::LONG> (*C++ struct*), 54
dv::Config::AttributeTypeGenerator<AttributeType::LONG>::type (*C++ type*), 54
dv::Config::AttributeTypeGenerator<AttributeType::LONG>::underlyingType (*C++ member*), 54
dv::Config::AttributeTypeGenerator<AttributeType::STRING> (*C++ struct*), 54
dv::Config::AttributeTypeGenerator<AttributeType::STRING>::type (*C++ type*), 54
dv::Config::AttributeTypeGenerator<AttributeType::STRING>::underlyingType (*C++ member*), 54
dv::Config::AttributeValue (*C++ struct*), 54
dv::Config::AttributeValue::AttributeValue (*C++ function*), 55
dv::Config::AttributeValue::getCUUnion (*C++ function*), 55
dv::Config::AttributeValue::value (*C++ member*), 55
dv::Config::AttributeValue::valueType (*C++ type*), 55
dv::Config::AttributeValue<AttributeType::STRING> (*C++ struct*), 55
dv::Config::AttributeValue<Attribute-

```

    Type::STRING>::AttributeValue
        (C++ function), 55
dv::Config::AttributeValue<Attribute-
    Type::STRING>::getCUunion      (C++ function), 55
dv::Config::AttributeValue<Attribute-
    Type::STRING>::value (C++ member),
    55
dv::Config::getCFlags (C++ function), 118
dv::Config::GLOBAL (C++ member), 119
dv::Config::Helper (C++ class), 74
dv::Config::Helper::flagsToStringCon-
    verter (C++ function), 74
dv::Config::Helper::rangesToStringCon-
    verter (C++ function), 74
dv::Config::Helper::stringToFlagsCon-
    verter (C++ function), 74
dv::Config::Helper::stringToRangesCon-
    verter (C++ function), 74
dv::Config::Helper::stringToTypeCon-
    verter (C++ function), 74
dv::Config::Helper::stringToValueCon-
    verter (C++ function), 74
dv::Config::Helper::typeToStringCon-
    verter (C++ function), 74
dv::Config::Helper::valueToStringCon-
    verter (C++ function), 74
dv::Config::Node (C++ class), 85
dv::Config::Node::addAttributeListener
    (C++ function), 85
dv::Config::Node::addNodeListener (C++ function), 85
dv::Config::Node::attributeBooleanRe-
    set (C++ function), 88
dv::Config::Node::attributeModifier-
    Button (C++ function), 88
dv::Config::Node::attributeModifier-
    FileChooser (C++ function), 88
dv::Config::Node::attributeModifier-
    GUISupport (C++ function), 88
dv::Config::Node::attributeModi-
    fierListOptions (C++ function), 88
dv::Config::Node::attributeModifier-
    PriorityAttributes (C++ function),
    88
dv::Config::Node::attributeModi-
    fierUnit (C++ function), 88
dv::Config::Node::attributeUpdaterAdd
    (C++ function), 88
dv::Config::Node::attributeUpdaterRe-
    move (C++ function), 88
dv::Config::Node::attributeUpdaterRe-
    moveAll (C++ function), 88
dv::Config::Node::clearSubTree (C++ func-
    tion), 86
dv::Config::Node::copyTo (C++ function), 86
dv::Config::Node::create (C++ function), 86
dv::Config::Node::createAttribute (C++ function), 86
dv::Config::Node::exists (C++ function), 86
dv::Config::Node::existsAttribute (C++ function), 86
dv::Config::Node::existsRelativeNode
    (C++ function), 88
dv::Config::Node::exportNodeToXML (C++ function), 87
dv::Config::Node::exportNodeToXML-
    String (C++ function), 87
dv::Config::Node::exportSubTreeToXML
    (C++ function), 87
dv::Config::Node::exportSubTreeToXML-
    String (C++ function), 87
dv::Config::Node::get (C++ function), 87
dv::Config::Node::getAttribute (C++ func-
    tion), 86
dv::Config::Node::getAttributeDescrip-
    tion (C++ function), 88
dv::Config::Node::getAttributeFlags
    (C++ function), 88
dv::Config::Node::getAttributeKeys (C++ function), 87
dv::Config::Node::getAttributeRanges
    (C++ function), 87, 88
dv::Config::Node::getAttributeType (C++ function), 87
dv::Config::Node::getBool (C++ function), 87
dv::Config::Node::getChildNames (C++ function), 87
dv::Config::Node::getChildren (C++ func-
    tion), 85
dv::Config::Node::getDouble (C++ function),
    87
dv::Config::Node::getFloat (C++ function),
    87
dv::Config::Node::getInt (C++ function), 87
dv::Config::Node::getLong (C++ function), 87
dv::Config::Node::getName (C++ function), 85
dv::Config::Node::getParent (C++ function),
    85
dv::Config::Node::getPath (C++ function), 85
dv::Config::Node::getRelativeNode (C++ function), 88
dv::Config::Node::getString (C++ function),
    87
dv::Config::Node::importNodeFromXML
    (C++ function), 87
dv::Config::Node::importNodeFromXML-
    String (C++ function), 87

```

dv::Config::Node::importSubTreeFromXML
 (*C++ function*), 87
dv::Config::Node::importSub-
 TreeFromXMLString (*C++ function*),
 87
dv::Config::Node::Node (*C++ function*), 85
dv::Config::Node::node (*C++ member*), 88
dv::Config::Node::operator bool (*C++ function*), 85
dv::Config::Node::operator dvConfigN-
 ode (*C++ function*), 85
dv::Config::Node::operator dvConfigN-
 odeConst (*C++ function*), 85
dv::Config::Node::put (*C++ function*), 87
dv::Config::Node::putAttribute (*C++ function*), 86
dv::Config::Node::putBool (*C++ function*), 87
dv::Config::Node::putDouble (*C++ function*),
 87
dv::Config::Node::putFloat (*C++ function*),
 87
dv::Config::Node::putInt (*C++ function*), 87
dv::Config::Node::putLong (*C++ function*), 87
dv::Config::Node::putString (*C++ function*),
 87
dv::Config::Node::remove (*C++ function*), 86
dv::Config::Node::removeAllAt-
 tributeListeners (*C++ function*),
 85
dv::Config::Node::removeAllAttributes
 (*C++ function*), 86
dv::Config::Node::removeAllNodeListen-
 ers (*C++ function*), 85
dv::Config::Node::removeAttribute (*C++ function*), 86
dv::Config::Node::removeAttributeLis-
 tener (*C++ function*), 85
dv::Config::Node::removeNode (*C++ function*), 85
dv::Config::Node::removeNodeListener
 (*C++ function*), 85
dv::Config::Node::removeSubTree (*C++ function*), 86
dv::Config::Node::stringToAttribute-
 Converter (*C++ function*), 87
dv::Config::Node::updateReadOnly (*C++ function*), 87
dv::Config::Node::updateReadOnlyAt-
 tribute (*C++ function*), 86
dv::Config::operator| (*C++ function*), 118
dv::Config::operator|= (*C++ function*), 118
dv::Config::Tree (*C++ class*), 114
dv::Config::Tree::attributeUpdaterRe-
 moveAll (*C++ function*), 114
dv::Config::Tree::attributeUpdaterRun
 (*C++ function*), 114
dv::Config::Tree::deleteTree (*C++ func-
 tion*), 114
dv::Config::Tree::errorLogCallbackGet
 (*C++ function*), 114
dv::Config::Tree::errorLogCallbackSet
 (*C++ function*), 114
dv::Config::Tree::existsNode (*C++ func-
 tion*), 114
dv::Config::Tree::getNode (*C++ function*),
 114
dv::Config::Tree::getTreeNode (*C++ func-
 tion*), 114
dv::Config::Tree::globalAttributeList-
 enerSet (*C++ function*), 114
dv::Config::Tree::globalNodeListener-
 Set (*C++ function*), 114
dv::Config::Tree::globalTree (*C++ func-
 tion*), 114
dv::Config::Tree::newTree (*C++ function*),
 114
dv::Config::Tree::operator dvCon-
 figTree (*C++ function*), 114
dv::Config::Tree (*C++ function*), 114
dv::Config::tree (*C++ member*), 115
dv::ConfigOption (*C++ class*), 55
dv::ConfigOption::_updateValue (*C++ func-
 tion*), 62
dv::ConfigOption::boolOption (*C++ func-
 tion*), 57
dv::ConfigOption::buttonOption (*C++ func-
 tion*), 57
dv::ConfigOption::ConfigOption (*C++ func-
 tion*), 62
dv::ConfigOption::configOption (*C++ mem-
 ber*), 62
dv::ConfigOption::createAttribute (*C++ func-
 tion*), 56
dv::ConfigOption::directoryOption (*C++ func-
 tion*), 61
dv::ConfigOption::doubleOption (*C++ func-
 tion*), 58, 59
dv::ConfigOption::fileOpenOption (*C++ func-
 tion*), 60
dv::ConfigOption::fileSaveOption (*C++ func-
 tion*), 60, 61
dv::ConfigOption::floatOption (*C++ func-
 tion*), 58
dv::ConfigOption::get (*C++ function*), 56
dv::ConfigOption::getConfigObject (*C++ func-
 tion*), 56
dv::ConfigOption::getOption (*C++ function*),
 62

dv::ConfigOption::getType (*C++ function*), 56
 dv::ConfigOption::intOption (*C++ function*), 57
 dv::ConfigOption::key (*C++ member*), 62
 dv::ConfigOption::listOption (*C++ function*), 59, 60
 dv::ConfigOption::longOption (*C++ function*), 58
 dv::ConfigOption::node (*C++ member*), 62
 dv::ConfigOption::rateLimit (*C++ member*), 62
 dv::ConfigOption::set (*C++ function*), 56
 dv::ConfigOption::setNodeAttrLink (*C++ function*), 62
 dv::ConfigOption::setRateLimit (*C++ function*), 56
 dv::ConfigOption::statisticOption (*C++ function*), 61
 dv::ConfigOption::stringOption (*C++ function*), 59
 dv::ConfigOption::type (*C++ member*), 62
 dv::ConfigOption::updateValue (*C++ function*), 57
 dv::cvectorConstProxy (*C++ class*), 62
 dv::cvectorConstProxy::~cvectorConstProxy (*C++ function*), 63
 dv::cvectorConstProxy::at (*C++ function*), 64
 dv::cvectorConstProxy::back (*C++ function*), 64
 dv::cvectorConstProxy::begin (*C++ function*), 65
 dv::cvectorConstProxy::capacity (*C++ function*), 64
 dv::cvectorConstProxy::cbegin (*C++ function*), 65
 dv::cvectorConstProxy::cend (*C++ function*), 65
 dv::cvectorConstProxy::const_iterator (*C++ type*), 63
 dv::cvectorConstProxy::const_pointer (*C++ type*), 63
 dv::cvectorConstProxy::const_reference (*C++ type*), 63
 dv::cvectorConstProxy::const_reverse_iterator (*C++ type*), 63
 dv::cvectorConstProxy::const_value_type (*C++ type*), 63
 dv::cvectorConstProxy::contains (*C++ function*), 64
 dv::cvectorConstProxy::containsIf (*C++ function*), 65
 dv::cvectorConstProxy::crbegin (*C++ function*), 65
 dv::cvectorConstProxy::crend (*C++ function*), 65
 dv::cvectorConstProxy::cvectorConstProxy (*C++ function*), 63
 dv::cvectorConstProxy::data (*C++ function*), 64
 dv::cvectorConstProxy::difference_type (*C++ type*), 63
 dv::cvectorConstProxy::empty (*C++ function*), 64
 dv::cvectorConstProxy::EMPTY_VECTOR (*C++ member*), 65
 dv::cvectorConstProxy::end (*C++ function*), 65
 dv::cvectorConstProxy::front (*C++ function*), 64
 dv::cvectorConstProxy::iterator (*C++ type*), 63
 dv::cvectorConstProxy::max_size (*C++ function*), 64
 dv::cvectorConstProxy::mVectorPtr (*C++ member*), 65
 dv::cvectorConstProxy::npos (*C++ member*), 65
 dv::cvectorConstProxy::operator std::vector (*C++ function*), 64
 dv::cvectorConstProxy::operator+ (*C++ function*), 65, 66
 dv::cvectorConstProxy::operator< (*C++ function*), 64, 66
 dv::cvectorConstProxy::operator<= (*C++ function*), 64, 66
 dv::cvectorConstProxy::operator= (*C++ function*), 63
 dv::cvectorConstProxy::operator!= (*C++ function*), 64, 66
 dv::cvectorConstProxy::operator== (*C++ function*), 64, 66
 dv::cvectorConstProxy::operator> (*C++ function*), 64, 66
 dv::cvectorConstProxy::operator>= (*C++ function*), 64, 66
 dv::cvectorConstProxy::operator[] (*C++ function*), 64
 dv::cvectorConstProxy::pointer (*C++ type*), 63
 dv::cvectorConstProxy::rbegin (*C++ function*), 65
 dv::cvectorConstProxy::reference (*C++ type*), 63
 dv::cvectorConstProxy::rend (*C++ function*), 65
 dv::cvectorConstProxy::reverse_iterator (*C++ type*), 63

dv::cvectorConstProxy::size (*C++ function*), 64
dv::cvectorConstProxy::size_type (*C++ type*), 63
dv::cvectorConstProxy::value_type (*C++ type*), 63
dv::cvectorProxy (*C++ class*), 66
dv::cvectorProxy::~cvectorProxy (*C++ function*), 67
dv::cvectorProxy::append (*C++ function*), 69
dv::cvectorProxy::assign (*C++ function*), 67, 68
dv::cvectorProxy::at (*C++ function*), 68
dv::cvectorProxy::back (*C++ function*), 68
dv::cvectorProxy::begin (*C++ function*), 68
dv::cvectorProxy::clear (*C++ function*), 68
dv::cvectorProxy::const_iterator (*C++ type*), 67
dv::cvectorProxy::const_pointer (*C++ type*), 66
dv::cvectorProxy::const_reference (*C++ type*), 67
dv::cvectorProxy::const_reverse_iterator (*C++ type*), 67
dv::cvectorProxy::const_value_type (*C++ type*), 66
dv::cvectorProxy::cvectorProxy (*C++ function*), 67
dv::cvectorProxy::data (*C++ function*), 68
dv::cvectorProxy::difference_type (*C++ type*), 67
dv::cvectorProxy::emplace (*C++ function*), 69
dv::cvectorProxy::emplace_back (*C++ function*), 68
dv::cvectorProxy::end (*C++ function*), 68
dv::cvectorProxy::erase (*C++ function*), 69
dv::cvectorProxy::front (*C++ function*), 68
dv::cvectorProxy::insert (*C++ function*), 69
dv::cvectorProxy::iterator (*C++ type*), 67
dv::cvectorProxy::npos (*C++ member*), 70
dv::cvectorProxy::operator+= (*C++ function*), 69
dv::cvectorProxy::operator= (*C++ function*), 67
dv::cvectorProxy::operator[] (*C++ function*), 68
dv::cvectorProxy::pointer (*C++ type*), 66
dv::cvectorProxy::pop_back (*C++ function*), 68
dv::cvectorProxy::push_back (*C++ function*), 68
dv::cvectorProxy::rbegin (*C++ function*), 68
dv::cvectorProxy::reassign (*C++ function*), 67
dv::cvectorProxy::reference (*C++ type*), 66
dv::cvectorProxy::remove (*C++ function*), 68
dv::cvectorProxy::removeIf (*C++ function*), 68
dv::cvectorProxy::rend (*C++ function*), 69
dv::cvectorProxy::reserve (*C++ function*), 68
dv::cvectorProxy::resize (*C++ function*), 68
dv::cvectorProxy::reverse_iterator (*C++ type*), 67
dv::cvectorProxy::shrink_to_fit (*C++ function*), 68
dv::cvectorProxy::size_type (*C++ type*), 67
dv::cvectorProxy::sortUnique (*C++ function*), 68
dv::cvectorProxy::swap (*C++ function*), 68
dv::cvectorProxy::value_type (*C++ type*), 66
dv::EventColor (*C++ enum*), 116
dv::EventColor::BLUE (*C++ enumerator*), 116
dv::EventColor::GREEN (*C++ enumerator*), 116
dv::EventColor::RED (*C++ enumerator*), 116
dv::EventColor::WHITE (*C++ enumerator*), 116
dv::FileDialogMode (*C++ enum*), 115
dv::FileDialogMode::DIRECTORY (*C++ enumerator*), 115
dv::FileDialogMode::OPEN (*C++ enumerator*), 115
dv::FileDialogMode::SAVE (*C++ enumerator*), 115
dv::has_advancedStaticInit (*C++ member*), 117
dv::has_initConfigOptions (*C++ member*), 117
dv::has_initDescription (*C++ member*), 117
dv::has_initInputs (*C++ member*), 117
dv::has_initOutputs (*C++ member*), 117
dv::has_initTypes (*C++ member*), 117
dv::InputDataWrapper (*C++ class*), 74
dv::InputDataWrapper::InputDataWrapper (*C++ function*), 75
dv::InputDataWrapper::operator* (*C++ function*), 75
dv::InputDataWrapper::operator-> (*C++ function*), 75
dv::InputDataWrapper<dv::Frame> (*C++ class*), 75
dv::InputDataWrapper<dv::Frame>::exposure (*C++ function*), 75
dv::InputDataWrapper<dv::Frame>::format (*C++ function*), 75
dv::InputDataWrapper<dv::Frame>::getMatCopy (*C++ function*), 76
dv::InputDataWrapper<dv::Frame>::getMatPointer (*C++ function*), 76

dv::InputDataWrapper<dv::Frame>::InputDataWrapper (*C++ function*), 75
 dv::InputDataWrapper<dv::Frame>::position (*C++ function*), 76
 dv::InputDataWrapper<dv::Frame>::positionX (*C++ function*), 75
 dv::InputDataWrapper<dv::Frame>::positionY (*C++ function*), 75
 dv::InputDataWrapper<dv::Frame>::roi (*C++ function*), 76
 dv::InputDataWrapper<dv::Frame>::size (*C++ function*), 76
 dv::InputDataWrapper<dv::Frame>::sizeX (*C++ function*), 75
 dv::InputDataWrapper<dv::Frame>::sizeY (*C++ function*), 75
 dv::InputDataWrapper<dv::Frame>::source (*C++ function*), 76
 dv::InputDataWrapper<dv::Frame>::timestamp (*C++ function*), 75
 dv::InputDataWrapper<dv::Frame>::timestampEndOfExposure (*C++ function*), 76
 dv::InputDataWrapper<dv::Frame>::timestampStartOfExposure (*C++ function*), 75
 dv::InputDefinition (*C++ class*), 76
 dv::InputDefinition::InputDefinition (*C++ function*), 77
 dv::InputDefinition::name (*C++ member*), 77
 dv::InputDefinition::optional (*C++ member*), 77
 dv::InputDefinition::typeName (*C++ member*), 77
 dv::InputDefinitionList (*C++ class*), 77
 dv::InputDefinitionList::addBoundingBoxBoxInput (*C++ function*), 78
 dv::InputDefinitionList::addEventInput (*C++ function*), 77
 dv::InputDefinitionList::addFrameInput (*C++ function*), 77
 dv::InputDefinitionList::addIMUInput (*C++ function*), 77
 dv::InputDefinitionList::addInput (*C++ function*), 77
 dv::InputDefinitionList::addTriggerInput (*C++ function*), 77
 dv::InputDefinitionList::getInputs (*C++ function*), 78
 dv::InputDefinitionList::inputs (*C++ member*), 78
 dv::InputVectorDataWrapper (*C++ class*), 78
 dv::InputVectorDataWrapper::InputVectorDataWrapper (*C++ function*), 78
 dv::InputVectorDataWrapper::operator* (*C++ function*), 78
 dv::InputVectorDataWrapper::operator-> (*C++ function*), 78
 dv::InputVectorDataWrapper<dv::BoundingBoxPacket, dv::BoundingBox> (*C++ class*), 78
 dv::InputVectorDataWrapper<dv::BoundingBoxPacket, dv::BoundingBox>::InputVectorDataWrapper (*C++ function*), 79
 dv::InputVectorDataWrapper<dv::EventPacket, dv::Event> (*C++ class*), 79
 dv::InputVectorDataWrapper<dv::EventPacket, dv::Event>::InputVectorDataWrapper (*C++ function*), 79
 dv::InputVectorDataWrapper<dv::EventPacket, dv::Event>::operator dv::EventStore (*C++ function*), 79
 dv::InputVectorDataWrapper<dv::IMUPacket, dv::IMU> (*C++ class*), 79
 dv::InputVectorDataWrapper<dv::IMUPacket, dv::IMU>::InputVectorDataWrapper (*C++ function*), 79
 dv::InputVectorDataWrapper<dv::TriggerPacket, dv::Trigger> (*C++ class*), 79
 dv::InputVectorDataWrapper<dv::TriggerPacket, dv::Trigger>::InputVectorDataWrapper (*C++ function*), 79
 dv::logEnd (*C++ member*), 117
 dv::logEndType (*C++ struct*), 79
 dv::Logger (*C++ class*), 79
 dv::Logger::debug (*C++ member*), 80
 dv::Logger::error (*C++ member*), 80
 dv::Logger::info (*C++ member*), 80
 dv::Logger::warning (*C++ member*), 80
 dv::LogStream (*C++ class*), 80
 dv::LogStream::commit (*C++ function*), 81
 dv::LogStream::flush (*C++ function*), 81
 dv::LogStream::format (*C++ function*), 81
 dv::LogStream::operator() (*C++ function*), 80
 dv::LogStream::operator<< (*C++ function*), 80
 dv::LogStream::stream_ (*C++ member*), 81
 dv::LogStream::write (*C++ function*), 81
 dv::ModuleBase (*C++ class*), 81
 dv::ModuleBase::__getDefaultConfig (*C++ member*), 83
 dv::ModuleBase::__moduleData (*C++ member*), 83

dv::ModuleBase::__setStaticGetDefaultConfig (*C++ function*), 83
dv::ModuleBase::__setStaticModuleData (*C++ function*), 83
dv::ModuleBase::~ModuleBase (*C++ function*), 82
dv::ModuleBase::config (*C++ member*), 82
dv::ModuleBase::configInternal (*C++ function*), 82
dv::ModuleBase::configUpdate (*C++ function*), 82
dv::ModuleBase::inputs (*C++ member*), 82
dv::ModuleBase::log (*C++ member*), 82
dv::ModuleBase::ModuleBase (*C++ function*), 82
dv::ModuleBase::moduleData (*C++ member*), 82
dv::ModuleBase::moduleNode (*C++ member*), 82
dv::ModuleBase::operator= (*C++ function*), 82
dv::ModuleBase::outputs (*C++ member*), 82
dv::ModuleBase::run (*C++ function*), 82
dv::ModuleBase::runInternal (*C++ function*), 82
dv::ModuleBase::staticConfigInit (*C++ function*), 83
dv::ModuleStatics (*C++ class*), 83
dv::ModuleStatics::config (*C++ function*), 84
dv::ModuleStatics::exit (*C++ function*), 84
dv::ModuleStatics::functions (*C++ member*), 84
dv::ModuleStatics::info (*C++ member*), 85
dv::ModuleStatics::init (*C++ function*), 84
dv::ModuleStatics::run (*C++ function*), 84
dv::ModuleStatics::staticInit (*C++ function*), 84
dv::OutputDataWrapper (*C++ class*), 88
dv::OutputDataWrapper::operator* (*C++ function*), 89
dv::OutputDataWrapper::operator-> (*C++ function*), 89
dv::OutputDataWrapper::OutputDataWrapper (*C++ function*), 89
dv::OutputDataWrapper<dv::Frame> (*C++ class*), 89
dv::OutputDataWrapper<dv::Frame>::commit (*C++ function*), 89
dv::OutputDataWrapper<dv::Frame>::exposure (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::format (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::mMaxSize (*C++ member*), 91
dv::OutputDataWrapper<dv::Frame>::operator<< (*C++ function*), 89, 91
dv::OutputDataWrapper<dv::Frame>::operator= (*C++ function*), 89
dv::OutputDataWrapper<dv::Frame>::OutputDataWrapper (*C++ function*), 89
dv::OutputDataWrapper<dv::Frame>::position (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::positionX (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::positionY (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::roi (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::setExposure (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::setMat (*C++ function*), 89
dv::OutputDataWrapper<dv::Frame>::setPosition (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::setSource (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::setTimestamp (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::size (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::sizeX (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::sizeY (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::source (*C++ function*), 91
dv::OutputDataWrapper<dv::Frame>::timestamp (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::timestampEndOfExposure (*C++ function*), 90
dv::OutputDataWrapper<dv::Frame>::timestampStartOfExposure (*C++ function*), 90
dv::OutputDefinition (*C++ class*), 91
dv::OutputDefinition::name (*C++ member*), 92
dv::OutputDefinition::OutputDefinition (*C++ function*), 92
dv::OutputDefinition::typeName (*C++ member*), 92
dv::OutputDefinitionList (*C++ class*), 92
dv::OutputDefinitionList::addBoundingBoxBoxOutput (*C++ function*), 92

tion), 98
dv::RuntimeInput<dv::Frame> (*C++ class*), 98
dv::RuntimeInput<dv::Frame>::frame (*C++ function*), 98
dv::RuntimeInput<dv::Frame>::RuntimeInput (*C++ function*), 98
dv::RuntimeInput<dv::Frame>::size (*C++ function*), 98
dv::RuntimeInput<dv::Frame>::sizeX (*C++ function*), 98
dv::RuntimeInput<dv::Frame>::sizeY (*C++ function*), 98
dv::RuntimeInputs (*C++ class*), 98
dv::RuntimeInputs::getBoundingBoxInput (*C++ function*), 100
dv::RuntimeInputs::getEventInput (*C++ function*), 99
dv::RuntimeInputs::getFrameInput (*C++ function*), 99
dv::RuntimeInputs::getIMUInput (*C++ function*), 99
dv::RuntimeInputs::getInput (*C++ function*), 99
dv::RuntimeInputs::getTriggerInput (*C++ function*), 99
dv::RuntimeInputs::getVectorInput (*C++ function*), 99
dv::RuntimeInputs::infoNode (*C++ function*), 100
dv::RuntimeInputs::isConnected (*C++ function*), 100
dv::RuntimeInputs::moduleData (*C++ member*), 100
dv::RuntimeInputs::RuntimeInputs (*C++ function*), 99
dv::RuntimeOutput (*C++ class*), 100
dv::RuntimeOutput::RuntimeOutput (*C++ function*), 101
dv::RuntimeOutput<dv::Frame> (*C++ class*), 101
dv::RuntimeOutput<dv::Frame>::data (*C++ function*), 101
dv::RuntimeOutput<dv::Frame>::frame (*C++ function*), 101
dv::RuntimeOutput<dv::Frame>::operator<< (*C++ function*), 101, 102
dv::RuntimeOutput<dv::Frame>::RuntimeOutput (*C++ function*), 101
dv::RuntimeOutput<dv::Frame>::setup (*C++ function*), 101
dv::RuntimeOutput<dv::Frame>::size (*C++ function*), 101
dv::RuntimeOutput<dv::Frame>::sizeX (*C++ function*), 101
dv::RuntimeOutput<dv::Frame>::sizeY
 (*C++ function*), 101
dv::RuntimeOutputs (*C++ class*), 102
dv::RuntimeOutputs::getBoundingBoxOutput (*C++ function*), 103
dv::RuntimeOutputs::getEventOutput (*C++ function*), 102
dv::RuntimeOutputs::getFrameOutput (*C++ function*), 103
dv::RuntimeOutputs::getIMUOutput (*C++ function*), 103
dv::RuntimeOutputs::getOutput (*C++ function*), 102
dv::RuntimeOutputs::getTriggerOutput (*C++ function*), 103
dv::RuntimeOutputs::getVectorOutput (*C++ function*), 102
dv::RuntimeOutputs::infoNode (*C++ function*), 103
dv::RuntimeOutputs::moduleData (*C++ member*), 104
dv::RuntimeOutputs::RuntimeOutputs (*C++ function*), 102
dv::RuntimeVectorInput (*C++ class*), 104
dv::RuntimeVectorInput::RuntimeVectorInput (*C++ function*), 104
dv::RuntimeVectorInput<dv::BoundingBoxPacket, dv::BoundingBox> (*C++ class*), 104
dv::RuntimeVectorInput<dv::BoundingBoxPacket, dv::BoundingBox>::RuntimeVectorInput (*C++ function*), 104
dv::RuntimeVectorInput<dv::BoundingBoxPacket, dv::BoundingBox>::size (*C++ function*), 104
dv::RuntimeVectorInput<dv::BoundingBoxPacket, dv::BoundingBox>::sizeX (*C++ function*), 104
dv::RuntimeVectorInput<dv::BoundingBoxPacket, dv::BoundingBox>::sizeY (*C++ function*), 104
dv::RuntimeVectorInput<dv::EventPacket, dv::Event> (*C++ class*), 104
dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::colorForEvent (*C++ function*), 105
dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::colorIndex (*C++ member*), 105
dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::events (*C++ function*), 105

dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::RuntimeVectorInput (C++ function), 105
 dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::size (C++ function), 105
 dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::sizeX (C++ function), 105
 dv::RuntimeVectorInput<dv::EventPacket, dv::Event>::sizeY (C++ function), 105
 dv::RuntimeVectorOutput (C++ class), 105
 dv::RuntimeVectorOutput::RuntimeVectorOutput (C++ function), 106
 dv::RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox> (C++ class), 106
 dv::RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox>::RuntimeVectorOutput (C++ function), 106
 dv::RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox>::setup (C++ function), 106
 dv::RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox>::size (C++ function), 106
 dv::RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox>::sizeX (C++ function), 106
 dv::RuntimeVectorOutput<dv::BoundingBoxPacket, dv::BoundingBox>::sizeY (C++ function), 106
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event> (C++ class), 106
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::data (C++ function), 107
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::events (C++ function), 107
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::operator<< (C++ function), 108
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::RuntimeVectorOutput (C++ function), 107
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::setup (C++ function), 107
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::size (C++ function), 107
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::sizeX (C++ function), 107
 dv::RuntimeVectorOutput<dv::EventPacket, dv::Event>::sizeY (C++ function), 107
 dv::sgn (C++ function), 116
 dv::statistics (C++ type), 119
 dv::statistics::CycleTime (C++ class), 70
 dv::statistics::CycleTime::~CycleTime (C++ function), 71
 dv::statistics::CycleTime::CycleTime (C++ function), 70, 71
 dv::statistics::CycleTime::finish (C++ function), 71
 dv::statistics::CycleTime::mStartTime (C++ member), 71
 dv::statistics::CycleTime::operator= (C++ function), 70, 71
 dv::statistics::CycleTime::start (C++ function), 71
 dv::statistics::Stats (C++ class), 108
 dv::statistics::Stats::~Stats (C++ function), 109
 dv::statistics::Stats::accumulator (C++ type), 110
 dv::statistics::Stats::accumulator_set (C++ type), 109
 dv::statistics::Stats::count (C++ function), 109
 dv::statistics::Stats::currentSample (C++ function), 109
 dv::statistics::Stats::DEFAULT_WINDOW_SIZE (C++ member), 110
 dv::statistics::Stats::init (C++ function), 110
 dv::statistics::Stats::mAccumulator (C++ member), 110
 dv::statistics::Stats::max (C++ function), 109
 dv::statistics::Stats::mCurrent (C++ member), 110
 dv::statistics::Stats::mean (C++ function), 109
 dv::statistics::Stats::min (C++ function), 109
 dv::statistics::Stats::mName (C++ member), 110
 dv::statistics::Stats::mNode (C++ member), 110
 dv::statistics::Stats::mRateLimiter (C++ member), 110
 dv::statistics::Stats::mWindowSize (C++ function), 109

member), 110
dv::statistics::Stats::operator() (C++ function), 109
dv::statistics::Stats::operator= (C++ function), 109
dv::statistics::Stats::publish (C++ function), 110
dv::statistics::Stats::PUBLISH-
ING_RATE_MS (C++ member), 110
dv::statistics::Stats::Stats (C++ func-
tion), 108, 109
dv::statistics::Stats::stats (C++ type),
109
dv::statistics::Stats::tag_count (C++
type), 110
dv::statistics::Stats::tag_lazy_rolling_mean
(C++ type), 109
dv::statistics::Stats::tag_lazy_rolling_ance (C++ type), 109
dv::statistics::Stats::tag_max (C++ type),
109
dv::statistics::Stats::tag_min (C++ type),
109
dv::statistics::Stats::var (C++ function),
109
dv::statistics::Throughput (C++ class), 111
dv::statistics::Throughput::~Through-
put (C++ function), 113
dv::statistics::Throughput::add (C++
function), 113
dv::statistics::Throughput::DE-
FAULT_MEASUREMENT_INTERVAL (C++
member), 114
dv::statistics::Throughput::mMeasure-
mentInterval (C++ member), 113
dv::statistics::Throughput::mNumEle-
ments (C++ member), 113
dv::statistics::Throughput::mStartTime
(C++ member), 113
dv::statistics::Throughput::operator=
(C++ function), 113
dv::statistics::Throughput::Throughput
(C++ function), 112, 113
DV_MODULE_MULTI_THREAD_SAFE (C macro), 119
DV_RUNTIME_NAME_STRING (C macro), 133
DV_RUNTIME_VERSION (C macro), 133
DV_RUNTIME_VERSION_MAJOR (C macro), 133
DV_RUNTIME_VERSION_MINOR (C macro), 133
DV_RUNTIME_VERSION_PATCH (C macro), 133
DV_RUNTIME_VERSION_STRING (C macro), 133
dvConfigAttributeChangeListener (C++
type), 119
dvConfigAttributeEvents (C++ enum), 121
dvConfigAttributeEvents::DVCFG_AT-
TRIBUTE_ADDED (C++ enumerator), 121
dvConfigAttributeEvents::DVCFG_AT-
TRIBUTE_MODIFIED (C++ enumerator),
121
dvConfigAttributeEvents::DVCFG_AT-
TRIBUTE_MODIFIED_CREATE (C++
enumerator), 121
dvConfigAttributeEvents::DVCFG_AT-
TRIBUTE_REMOVED (C++ enumerator),
121
dvConfigAttributeFlags (C++ enum), 120
dvConfigAttribute-
Flags::DVCFG_FLAGS_IMPORTED
(C++ enumerator), 120
dvConfigAttribute-
Flags::DVCFG_FLAGS_NO_EXPORT
(C++ enumerator), 120
dvConfigAttribute-
Flags::DVCFG_FLAGS_NORMAL (C++
enumerator), 120
dvConfigAttribute-
Flags::DVCFG_FLAGS_READ_ONLY
(C++ enumerator), 120
dvConfigAttributeRange (C++ union), 71
dvConfigAttributeRange::doubleRange
(C++ member), 71
dvConfigAttributeRange::floatRange (C++
member), 71
dvConfigAttributeRange::intRange (C++
member), 71
dvConfigAttributeRange::longRange (C++
member), 71
dvConfigAttributeRange::stringRange
(C++ member), 71
dvConfigAttributeRanges (C++ struct), 71
dvConfigAttributeRanges::max (C++ mem-
ber), 71
dvConfigAttributeRanges::min (C++ mem-
ber), 71
dvConfigAttributeType (C++ enum), 120
dvConfigAttributeType::DVCFG_TYPE_BOOL
(C++ enumerator), 120
dvConfigAttributeType::DVCFG_TYPE_DOU-
BLE (C++ enumerator), 120
dvConfigAttribute-
Type::DVCFG_TYPE_FLOAT (C++
enumerator), 120
dvConfigAttributeType::DVCFG_TYPE_INT
(C++ enumerator), 120
dvConfigAttributeType::DVCFG_TYPE_LONG
(C++ enumerator), 120
dvConfigAttribute-
Type::DVCFG_TYPE_STRING (C++
enumerator), 120

dvConfigAttributeType::DVCFG_TYPE_UNKNOWN (*C++ enumerator*), 120
 dvConfigAttributeUpdater (*C++ type*), 120
 dvConfigAttributeValue (*C++ union*), 71
 dvConfigAttributeValue::boolean (*C++ member*), 72
 dvConfigAttributeValue::ddouble (*C++ member*), 72
 dvConfigAttributeValue::ffloat (*C++ member*), 72
 dvConfigAttributeValue::iint (*C++ member*), 72
 dvConfigAttributeValue::ilong (*C++ member*), 72
 dvConfigAttributeValue::string (*C++ member*), 72
 dvConfigNode (*C++ type*), 119
 dvConfigNodeChangeListener (*C++ type*), 119
 dvConfigNodeConst (*C++ type*), 119
 dvConfigNodeEvents (*C++ enum*), 120
 dvConfigNodeEvents::DVCFG_NODE_CHILD_ADDED (*C++ enumerator*), 121
 dvConfigNodeEvents::DVCFG_NODE_CHILD_MOVED (*C++ enumerator*), 121
 dvConfigTree (*C++ type*), 120
 dvConfigTreeConst (*C++ type*), 120
 dvConfigTreeErrorLogCallback (*C++ type*), 120
 dvLogLevel (*C++ enum*), 132
 dvLogLevel::DVLOG_DEBUG (*C++ enumerator*), 132
 dvLogLevel::DVLOG_ERROR (*C++ enumerator*), 132
 dvLogLevel::DVLOG_INFO (*C++ enumerator*), 132
 dvLogLevel::DVLOG_WARNING (*C++ enumerator*), 132
 dvModuleData (*C++ type*), 130
 dvModuleDataS (*C++ struct*), 72
 dvModuleDataS::moduleNode (*C++ member*), 72
 dvModuleDataS::moduleState (*C++ member*), 72
 dvModuleFunctions (*C++ type*), 130
 dvModuleFunctionsS (*C++ struct*), 72
 dvModuleFunctionsS::moduleConfig (*C++ member*), 72
 dvModuleFunctionsS::moduleExit (*C++ member*), 72
 dvModuleFunctionsS::moduleInit (*C++ member*), 72
 dvModuleFunctionsS::moduleRun (*C++ member*), 72
 dvModuleFunctionsS::moduleStaticInit (*C++ member*), 72
 dvModuleHooks (*C++ enum*), 130
 dvModuleHooks::DV_HOOK_DEVICE_DISCOVERY (*C++ enumerator*), 130
 dvModuleInfo (*C++ type*), 130
 dvModuleInfos (*C++ struct*), 72
 dvModuleInfos::description (*C++ member*), 73
 dvModuleInfos::functions (*C++ member*), 73
 dvModuleInfos::memSize (*C++ member*), 73
 dvModuleInfos::version (*C++ member*), 73
 dvType (*C++ struct*), 73
 dvType::construct (*C++ member*), 73
 dvType::description (*C++ member*), 73
 dvType::destruct (*C++ member*), 73
 dvType::id (*C++ member*), 73
 dvType::identifier (*C++ member*), 73
 dvType::pack (*C++ member*), 73
 dvType::sizeOfType (*C++ member*), 73
 dvType::timeElementExtractor (*C++ member*), 73
 dvType::unpack (*C++ member*), 73
 dvType::unpackTimeElementRange (*C++ member*), 73
 dvTypeConstructPtr (*C++ type*), 129
 dvTypeDestructPtr (*C++ type*), 129
 dvTypedObject (*C++ struct*), 73
 dvTypedObject::obj (*C++ member*), 74
 dvTypedObject::objSize (*C++ member*), 74
 dvTypedObject::typeId (*C++ member*), 74
 dvTypePackFuncPtr (*C++ type*), 129
 dvTypeTimeElementExtractor (*C++ struct*), 74
 dvTypeTimeElementExtractor::endTimestamp (*C++ member*), 74
 dvTypeTimeElementExtractor::numElements (*C++ member*), 74
 dvTypeTimeElementExtractor::startTimestamp (*C++ member*), 74
 dvTypeTimeElementExtractorPtr (*C++ type*), 129
 dvTypeUnpackFuncPtr (*C++ type*), 129
 dvTypeUnpackTimeElementRangeFuncPtr (*C++ type*), 129

H

htobeflt (*C++ function*), 127
htoleflt (*C++ function*), 127

L

leflttoh (*C++ function*), 127

R

registerModuleClass (*C macro*), 131

T

TCPTLSSocket (*C++ class*), 110

TCPTLSSocket::~TCPTLSSocket (*C++ function*),
111
TCPTLSSocket::baseSocket (*C++ function*), 111
TCPTLSSocket::close (*C++ function*), 111
TCPTLSSocket::local_address (*C++ function*),
111
TCPTLSSocket::local_endpoint (*C++ function*), 111
TCPTLSSocket::local_port (*C++ function*), 111
TCPTLSSocket::localEndpoint (*C++ member*),
111
TCPTLSSocket::read (*C++ function*), 111
TCPTLSSocket::remote_address (*C++ function*), 111
TCPTLSSocket::remote_endpoint (*C++ function*), 111
TCPTLSSocket::remote_port (*C++ function*),
111
TCPTLSSocket::remoteEndpoint (*C++ member*), 111
TCPTLSSocket::secureConnection (*C++ member*), 111
TCPTLSSocket::socket (*C++ member*), 111
TCPTLSSocket::socketClosed (*C++ member*),
111
TCPTLSSocket::start (*C++ function*), 111
TCPTLSSocket::TCPTLSSocket (*C++ function*),
111
TCPTLSSocket::write (*C++ function*), 111

U

UNUSED_ARGUMENT (*C macro*), 132

W

WriteOrderedSocket (*C++ class*), 115
WriteOrderedSocket::write (*C++ function*),
115
WriteOrderedSocket::WriteOrderedSocket
(*C++ function*), 115
WriteOrderedSocket::writeQueue (*C++ member*), 115